

PUBLISHED: 03-JUL-2018
2020.0 DEFENDER (LE), 501-14

HANDLES, LOCKS, LATCHES AND ENTRY SYSTEMS

HOOD LATCH (G2289364)

mcx30.com

REMOVAL

 NOTES:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1.




- Remove the 4 upper fasteners.
- Release the 4 lower clips.
- Remove the radiator grille.


2.

 NOTE:


Do this step on both sides.

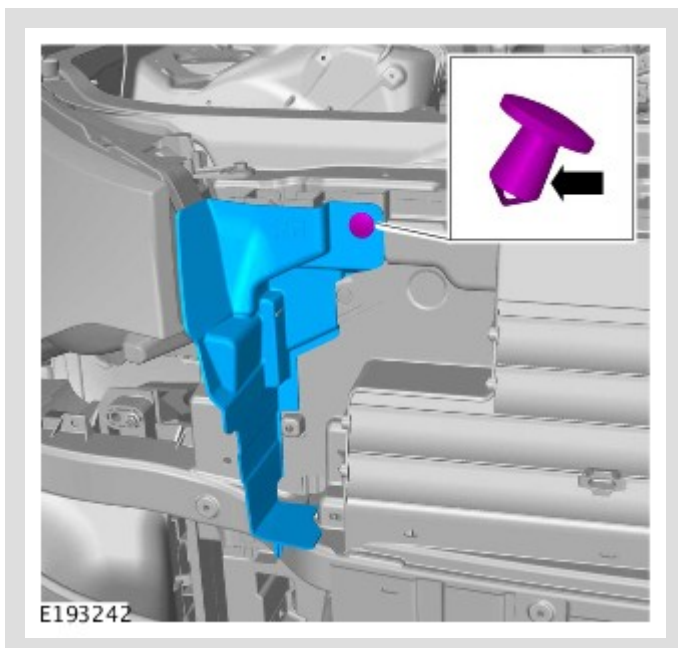

- Remove the fastener.
- Remove the upper air deflector.

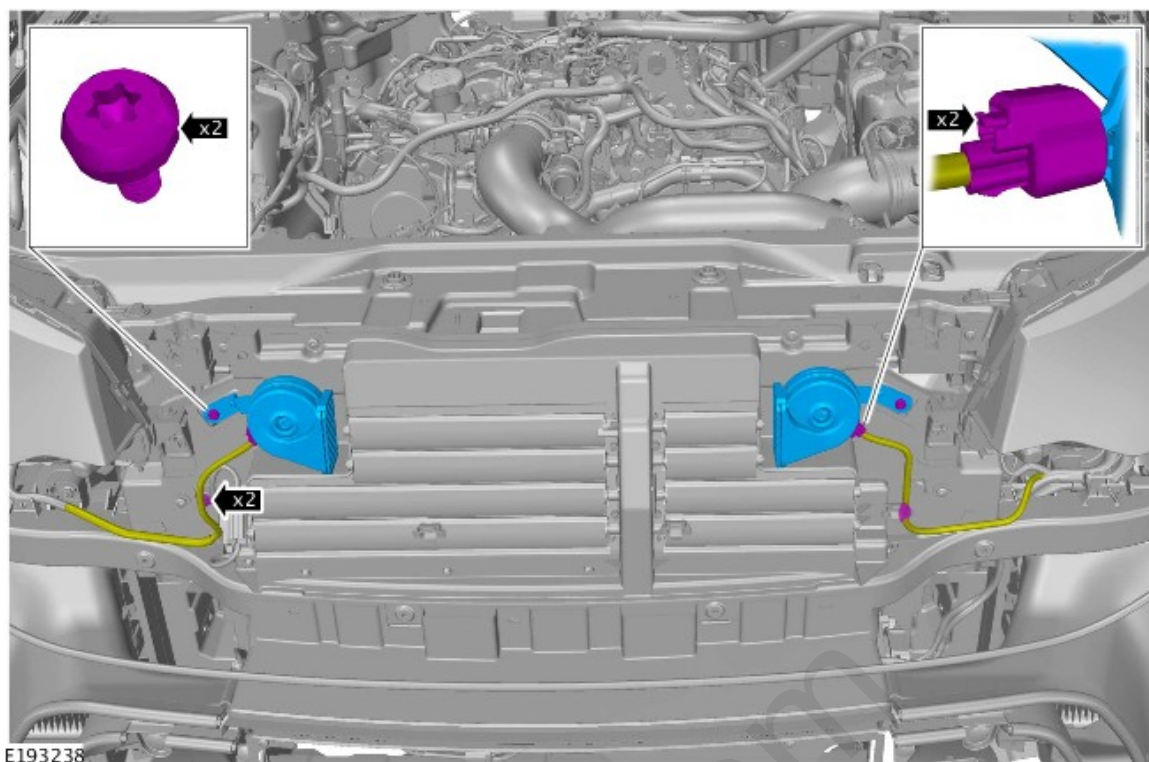


- Disconnect the 2 electrical connectors.
- Remove the 2 clips.
- Remove the 2 bolts.
- Remove the 2 horns.

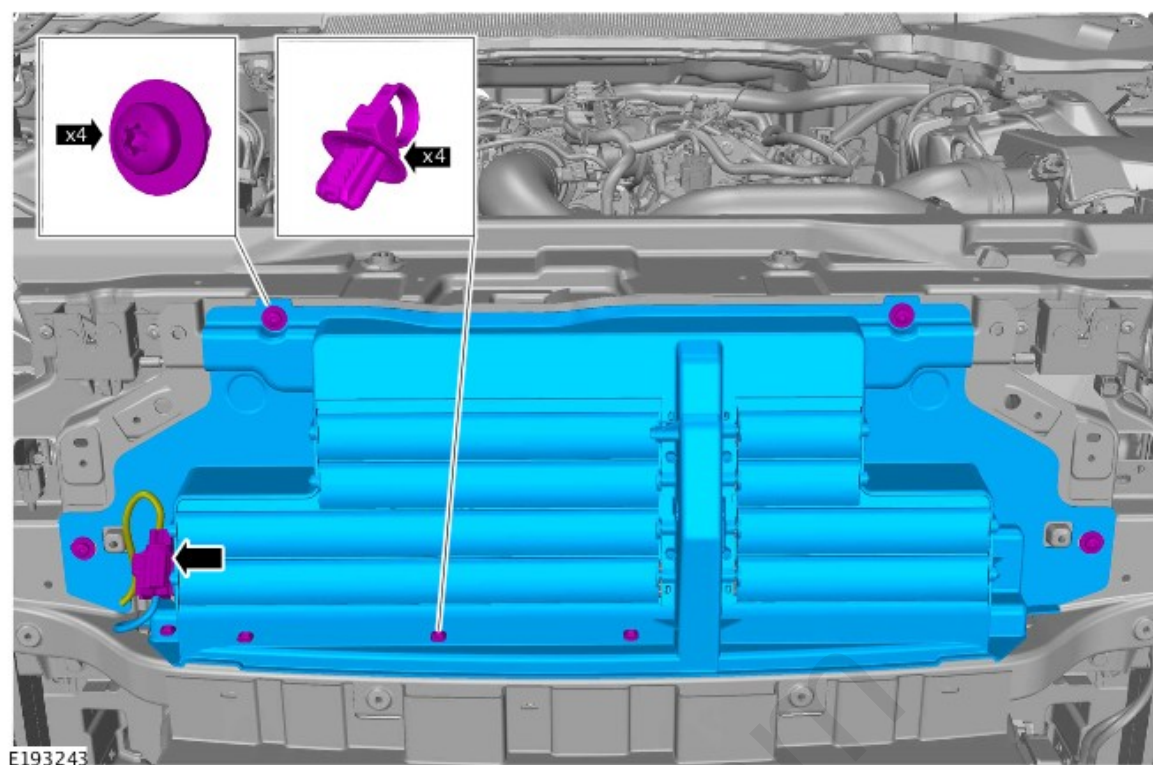

- Disconnect the electrical connector.
- Remove the 4 clips.
- Remove the 4 bolts.
- Remove the active vanes.

5.

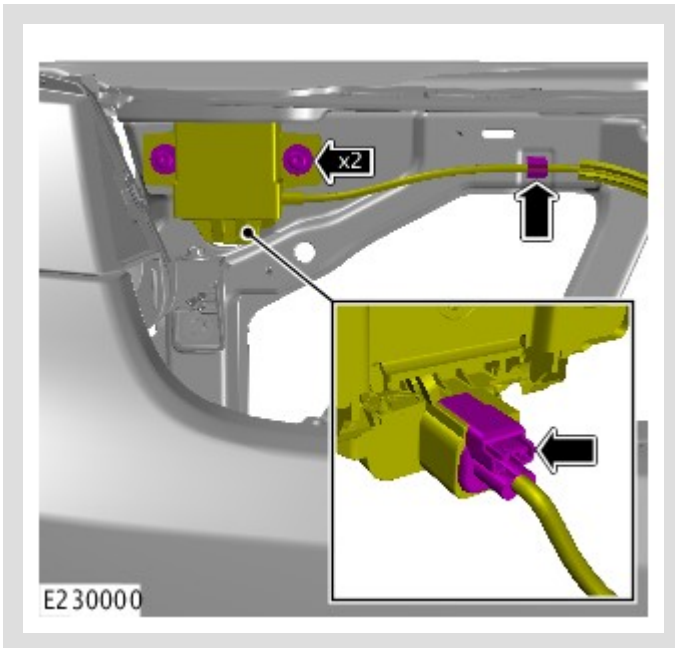


- Release the cable from the clip.
- Remove the 2 bolts.
- Disconnect the electrical connector.
- Reposition the hood latch away from the hood latch panel.

6.

NOTE:

Right side hood latch.

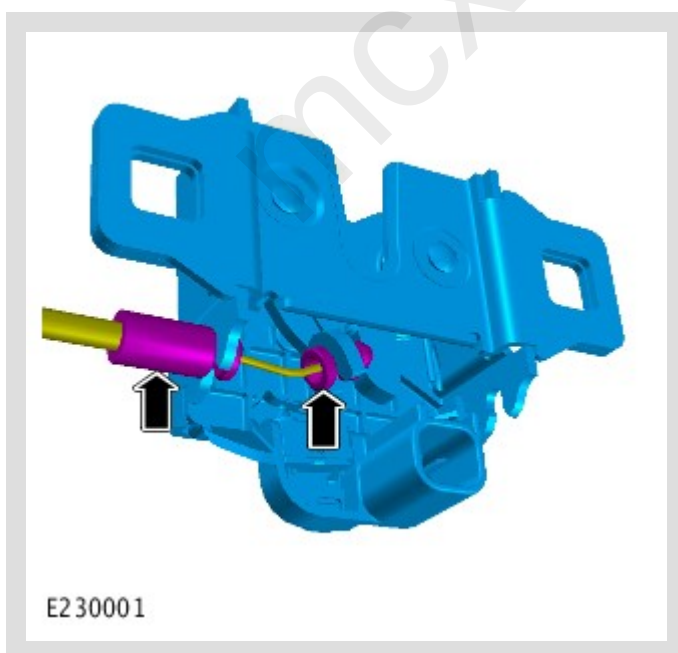


- Remove the 2 cable clips from the hood latch.
- Remove the hood latch.

7.

NOTE:

Left side hood latch.

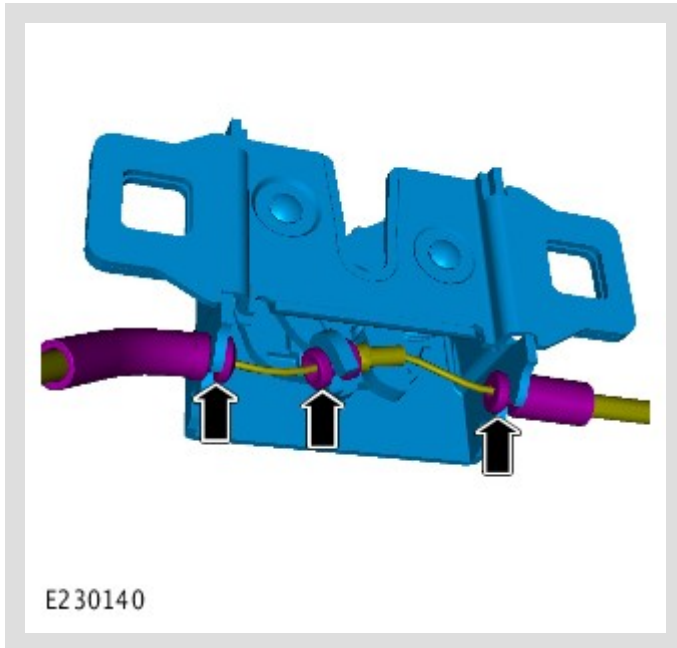

- Remove the 3 cable clips from the hood latch.
- Remove the hood latch.

INSTALLATION

1. Install the cables to the hood latch.

- 2.
- Connect the electrical connector to the hood latch.
 - Install and tighten the 2 hood latch bolts.
Torque: 10Nm
 - Install the cable to the clip.

- 3.
- Install the active vanes.
 - Install and tighten the 4 bolts.
Torque: 5Nm
 - Install the 4 clips.
 - Connect the electrical connector.

- 4.
- Install the 2 horns.
 - Install and tighten the 2 bolts.
Torque: 7Nm
 - Install the 2 clips.
 - Connect the 2 electrical connectors.

5. **NOTE:**

Do this step on both sides.

- Install the upper air deflector.
- Install the fastener.

- 6.
- Install the radiator grille.
 - Secure the 4 lower clips.
 - Install the 4 upper fasteners.