

PUBLISHED: 14-OCT-2019
2020.0 DEFENDER (LE), 501-16

WIPERS AND WASHERS

HEADLAMP WASHER JET (G2344860)

mcx30.com

REMOVAL


 NOTES:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains illustrations for left side components, right side components are similar.

1. Remove the radiator grille.

Refer to: [Radiator Grille](#) (501-08 Exterior Trim and Ornamentation, Removal and Installation).

- 2.

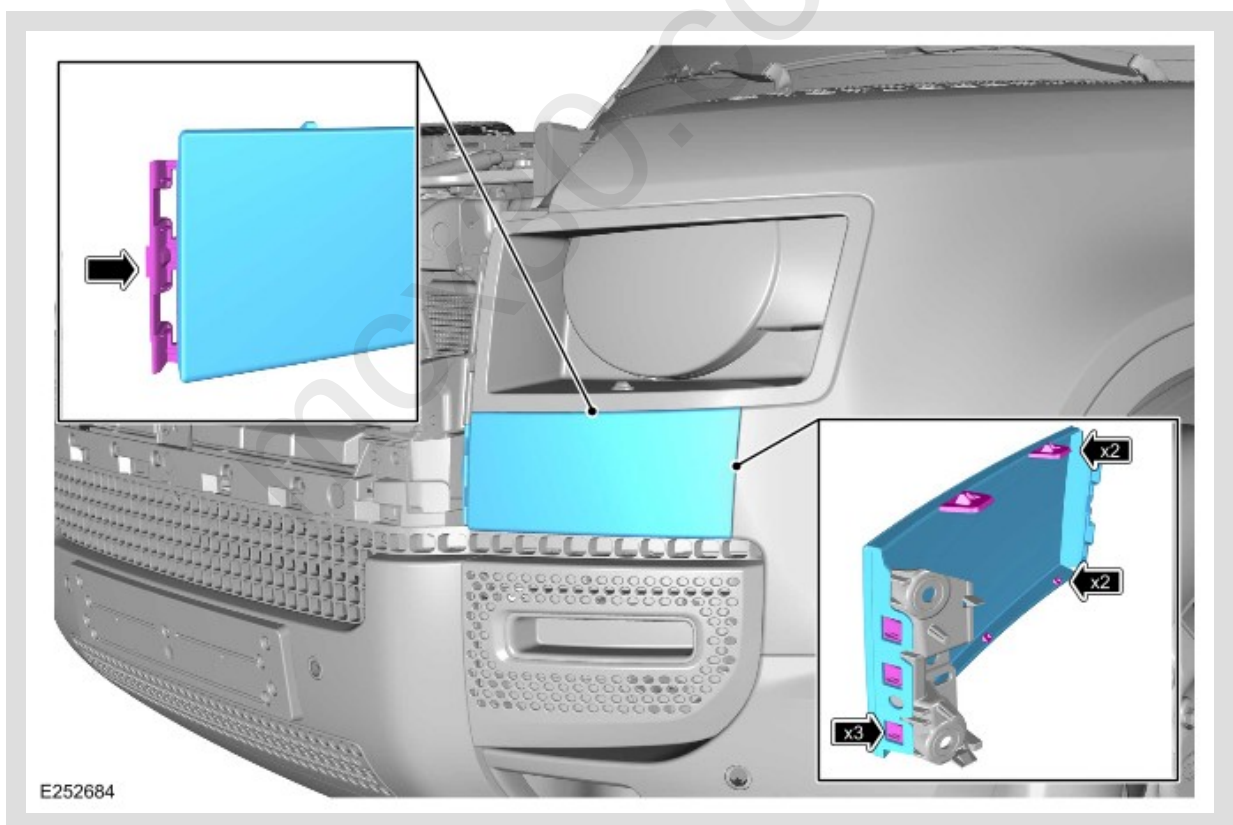


- Use a suitable trim tool to release the access cover 7 clips
- Remove the access cover.

3.

NOTE:

Be prepared to collect the escaping fluids.

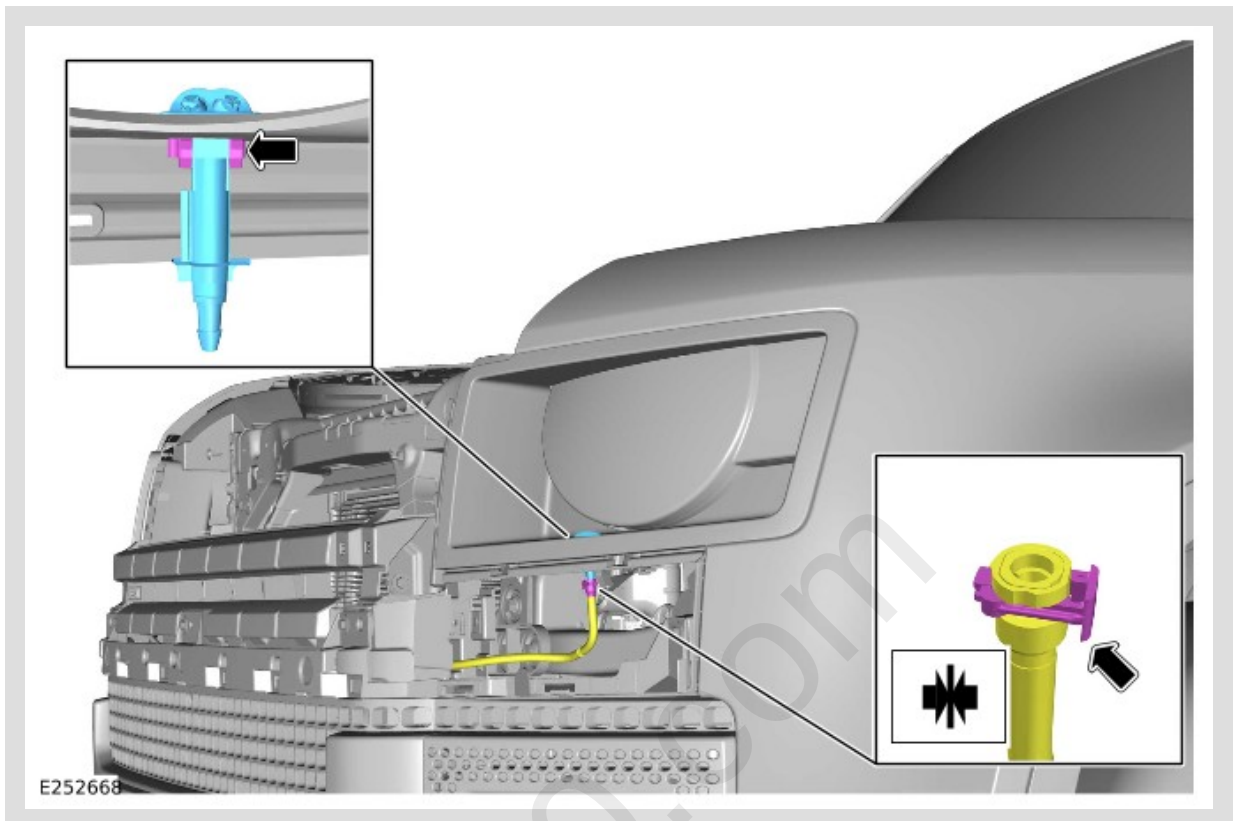

- Disconnect the headlamp washer jet hose from the headlamp washer jet.
- Remove the headlamp washer jet from the headlamp trim panel.

INSTALLATION

1.

- Install the headlamp washer jet into the headlamp trim panel.
- Connect the headlamp washer jet hose to the headlamp washer jet.

2.

CAUTION:

Make sure that all the clips are correctly installed.

Install the access cover.

3.

Install the radiator grille.

Refer to: [Radiator Grille](#) (501-08 Exterior Trim and Ornamentation, Removal and Installation).

mcx30.com