

PUBLISHED: 14-OCT-2019
2020.0 DEFENDER (LE), 501-16

WIPERS AND WASHERS

HEADLAMP WASHER PUMP (G2416542)

mcx30.com

REMOVAL


 NOTES:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1. Raise and support the vehicle on a suitable 2-post lift.
Refer to: [Jacking and Lifting](#) (100-02 Jacking and Lifting, Description and Operation).


2. Remove the front right wheel arch liner.
Refer to: [Front Wheel Arch Liner](#) (501-02 Front End Body Panels, Removal and Installation).

- 3.

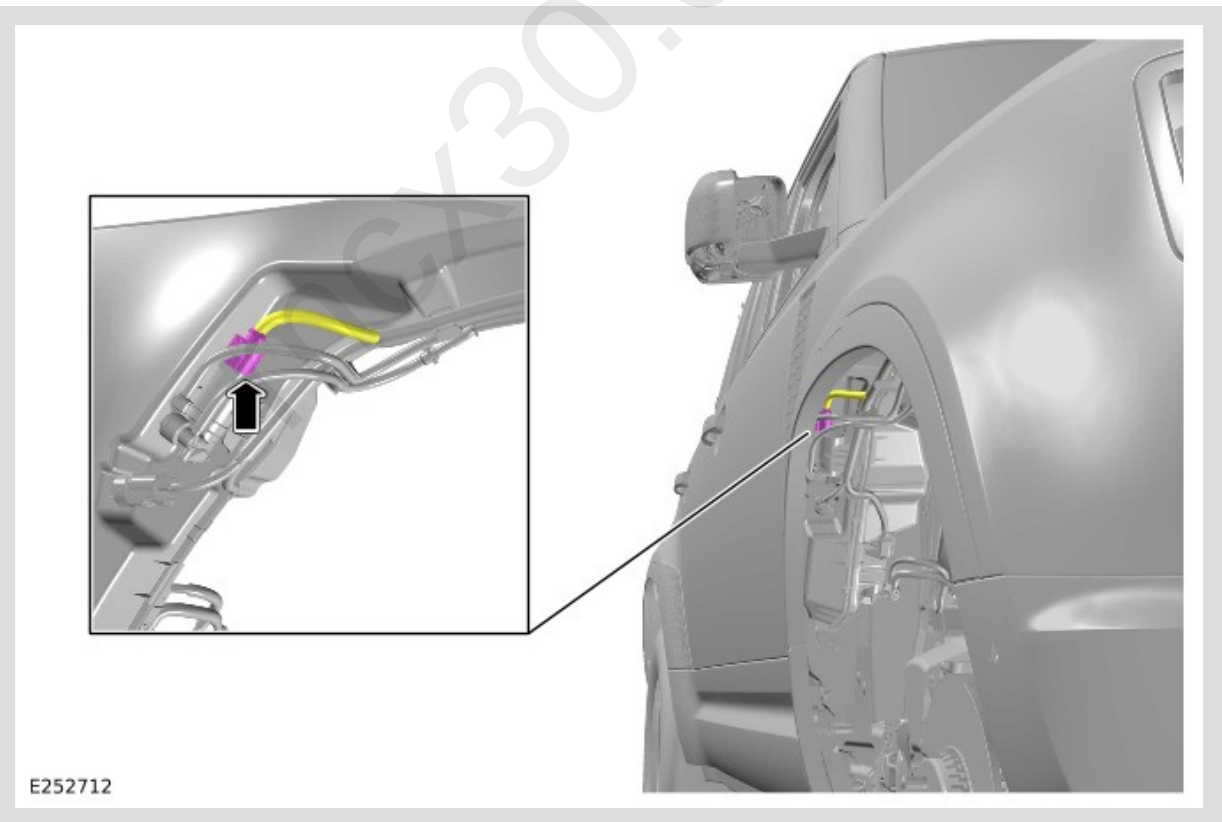


Disconnect the electrical connector.

4.

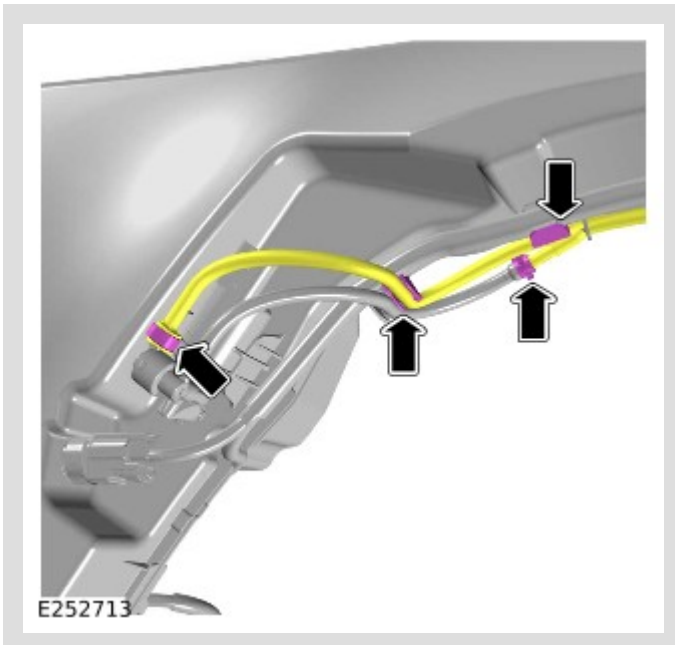

- Disconnect the 2 headlamp washer hoses.
- Release the washer hose from the 2 clips.

5.

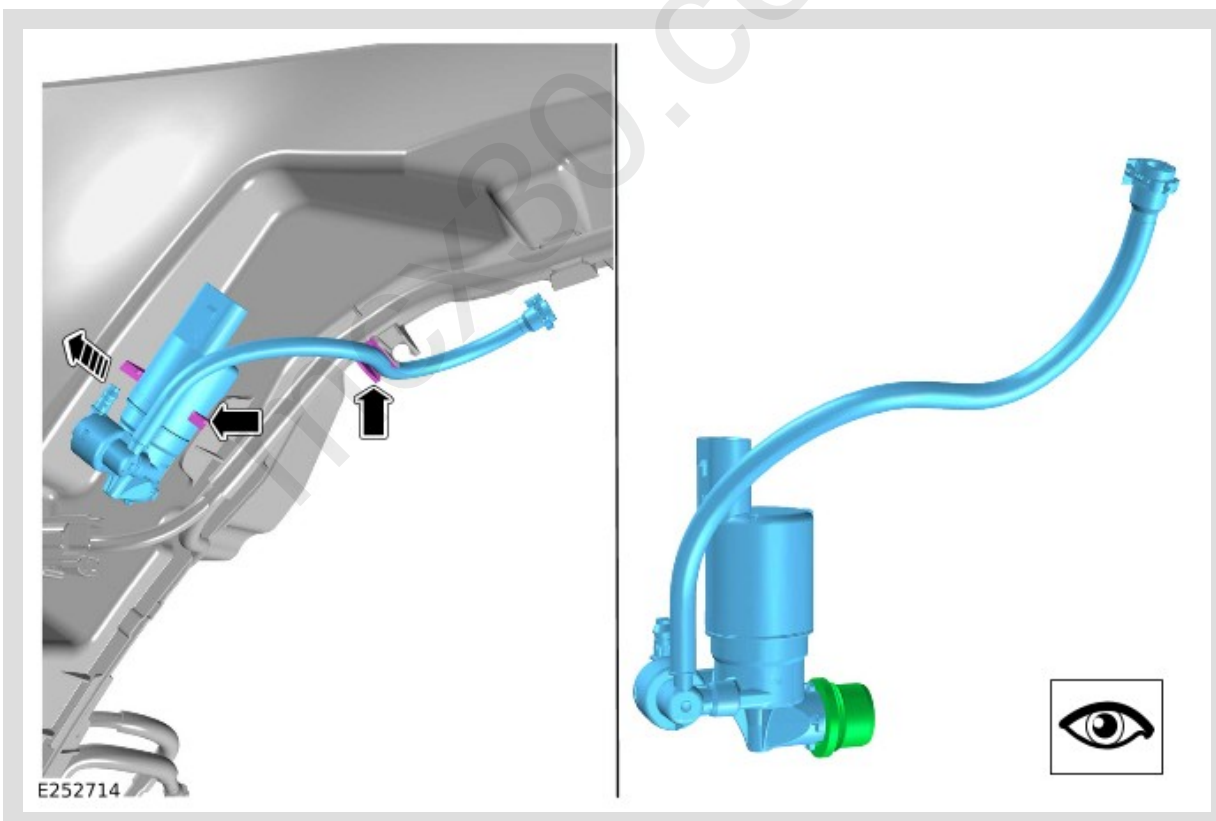

- Release the headlamp washer hose from the clip.
- Remove the headlamp washer pump from the windshield washer reservoir.

INSTALLATION

1.

⚠ CAUTION:

The seal is to be reused unless damaged.

- Install the headlamp washer pump into the windshield washer reservoir.
- Connect the 2 headlamp washer hoses.
- Secure the 2 headlamp washer hoses to the 2 clips.
- Connect the electrical connector.

2.

Install the front right wheel arch liner.

Refer to: [Front Wheel Arch Liner](#) (501-02 Front End Body Panels, Removal and Installation).