

PUBLISHED: 05-NOV-2019
2020.0 DEFENDER (LE), 501-16

WIPERS AND WASHERS

RAIN/LIGHT SENSOR [G2443862]

mcx30.com

GENERAL EQUIPMENT

EQUIPMENT NAME

Jaguar Land Rover approved diagnostic equipment

REMOVAL



 CAUTIONS:

- Make sure the ignition is OFF at all times during the replacement procedure.
- Care must be taken to avoid damaging the surrounding components.
- After removal and installation of the rain/light sensor, wait 10 minutes before the calibration routine is completed. Failure to follow this instruction may result in calibration failure.

 NOTES:

- This procedure contains some variation in the illustration depending on the vehicle specification, but essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.


1.

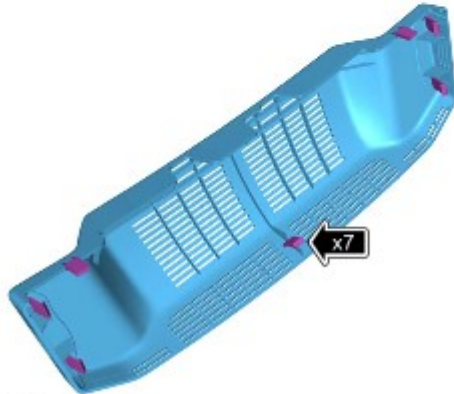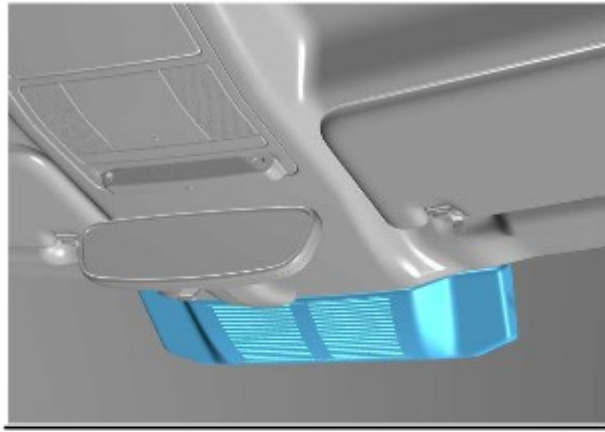

E252715

- Release the 7 clips.
- Remove the cover.

2.

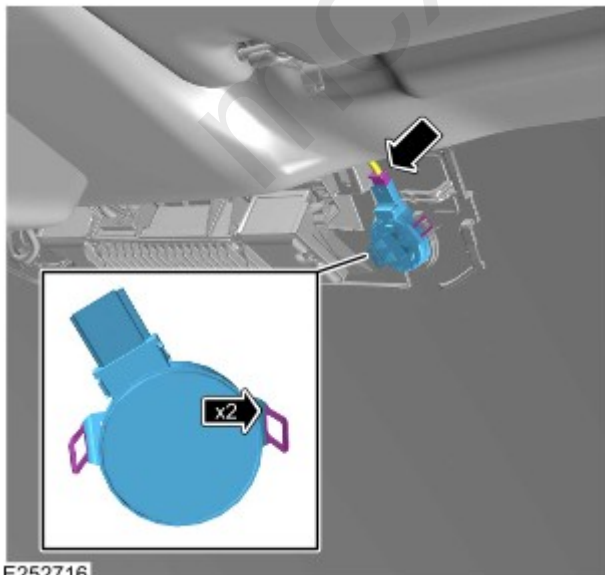

E252716

- Disconnect the electrical connector from the rain/light sensor.
- Release the 2 clips.
- Remove the rain/light sensor.

INSTALLATION

⚠ CAUTIONS:

- Make sure that the rain/light sensor is correctly installed.
- Make sure that the windshield and rain/light sensor are not contaminated.
- Make sure that the area is clean and free from foreign materials.

△ NOTES:

- Prior to switch the ignition ON first time after the rain/light sensor replacement please allow at least 10 minutes for the gel pad to adhere to the windshield surface.
- Following the settle period – preform a rain sensor re-adaption request using JLR diagnosis (ensure both front doors, and hood are closed, stalk in auto position and ignition is switched ON).

1.

⚠ CAUTIONS:

- Make sure that all the clips are correctly installed.
- Make sure that the rain/light sensor is fully adheres to the windshield.
- Install the electrical connector to the rain/light sensor.
- Install the rain/light sensor.
- Install the cover.

2.

Allow 10 minutes before calibrating the rain/light sensor.

3.

Use the Jaguar Land Rover (JLR) approved diagnostic equipment to calibrate the rain/light sensor.

General Equipment: [Jaguar Land Rover approved diagnostic equipment](#)