

PUBLISHED: 06-AUG-2019
2020.0 DEFENDER (LE), 501-16

WIPERS AND WASHERS

WINDSHIELD WASHER FLUID LEVEL SENSOR (G2344863)

mcx30.com

REMOVAL


 NOTES:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1. Raise and support the vehicle on a suitable 2-post lift.
Refer to: [Jacking and Lifting](#) (100-02 Jacking and Lifting, Description and Operation).

2. Remove the front right wheel arch liner.
Refer to: [Front Wheel Arch Liner](#) (501-02 Front End Body Panels, Removal and Installation).

- 3.

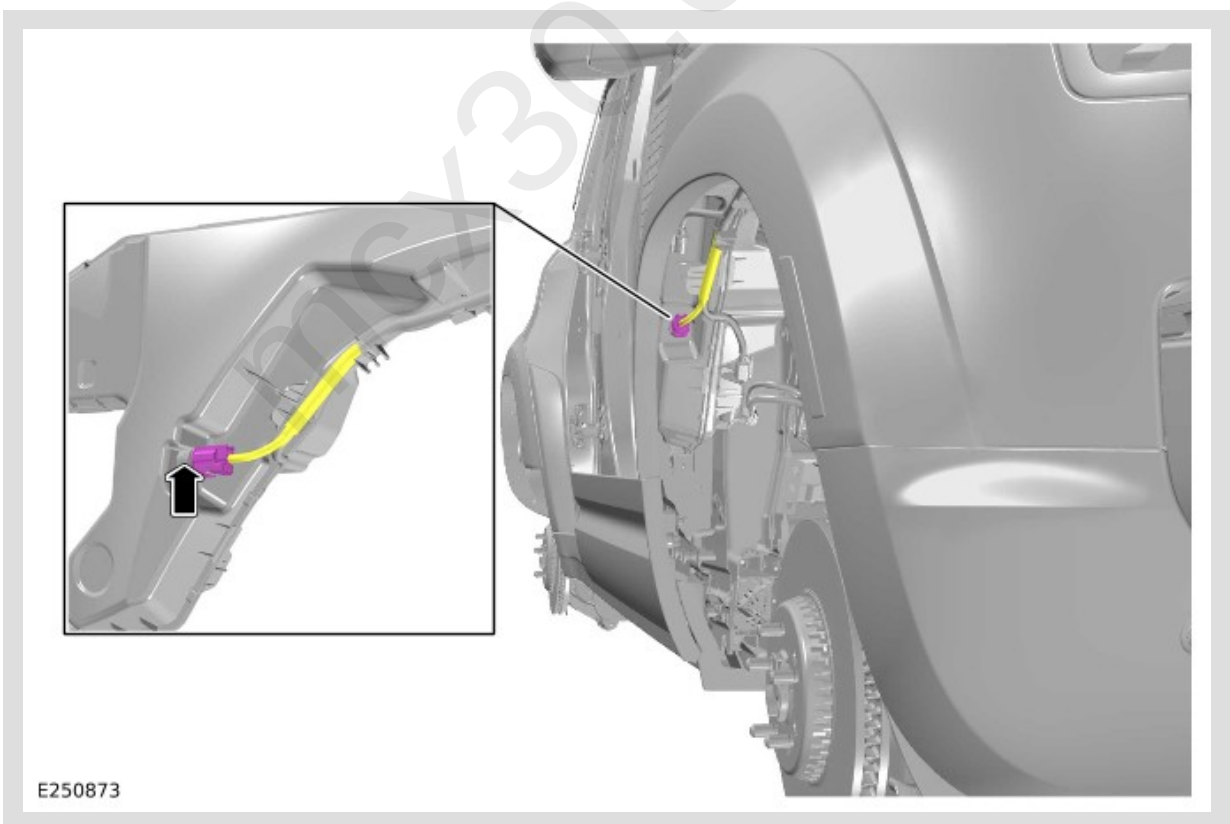


Disconnect the electrical connector from the windshield washer fluid level sensor.

4.

NOTE:

Be prepared to collect escaping fluids.

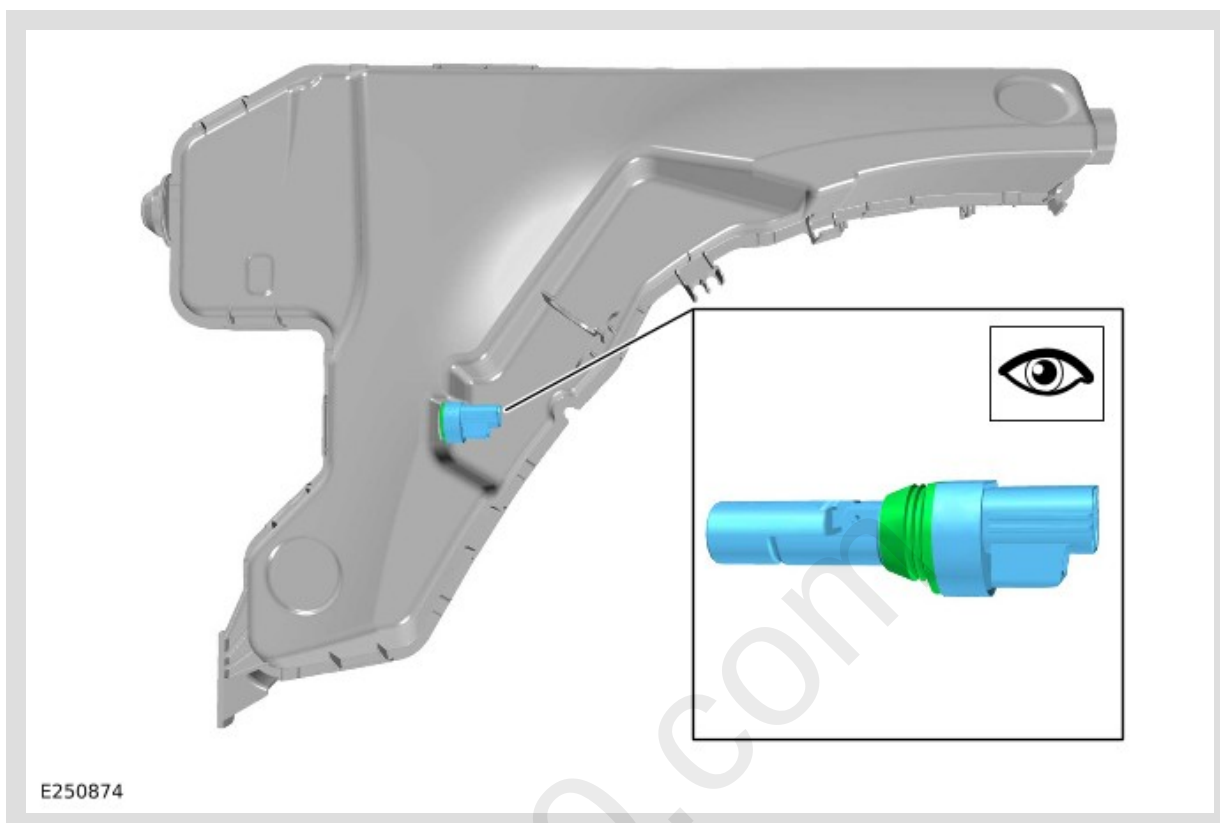

Remove the windshield washer fluid level sensor from the windshield washer fluid reservoir.

INSTALLATION

1.

CAUTION:

The seal is to be reused unless damaged.

- Install the windshield washer fluid level sensor into the windshield washer fluid reservoir.
- Connect the electrical connector to the windshield washer fluid level sensor.

2.

Install the front right wheel arch liner.

Refer to: [Front Wheel Arch Liner](#) (501-02 Front End Body Panels, Removal and Installation).