

PUBLISHED: 13-MAY-2020
2020.0 DEFENDER (LE), 501-17

ROOF OPENING PANEL

CANVAS ROOF AIR DEFLECTOR (G2684047)

mcx30.com

REMOVAL


 WARNING:

Make sure the ignition is OFF before carrying out this procedure.


 NOTES:

- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.
- This procedure contains illustrations showing certain components removed to provide extra clarity.

1.

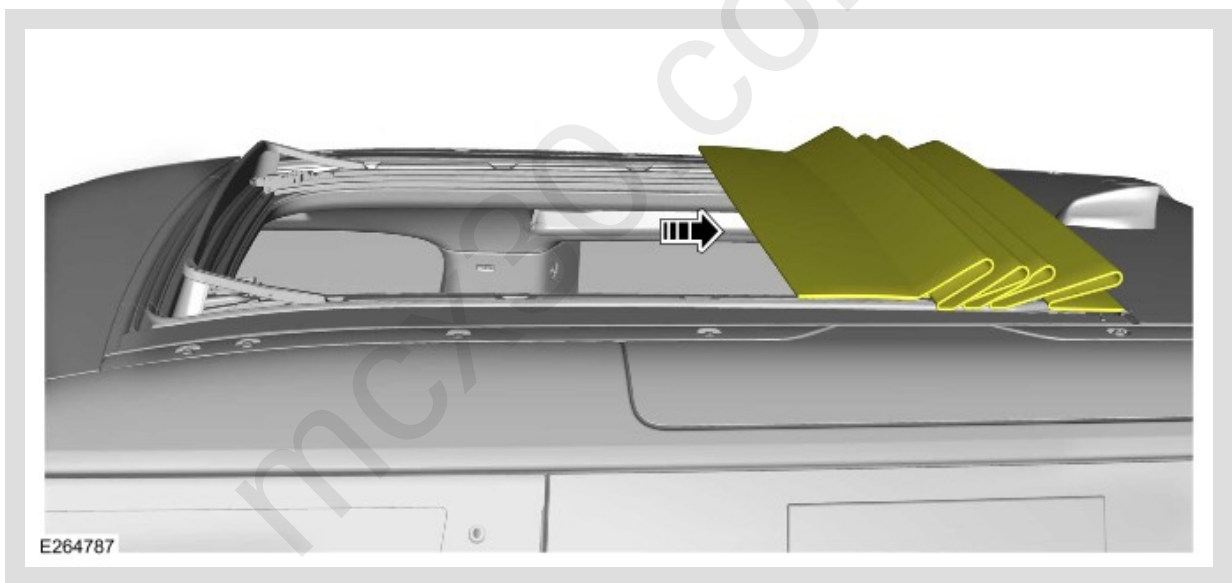

Open the canvas roof.

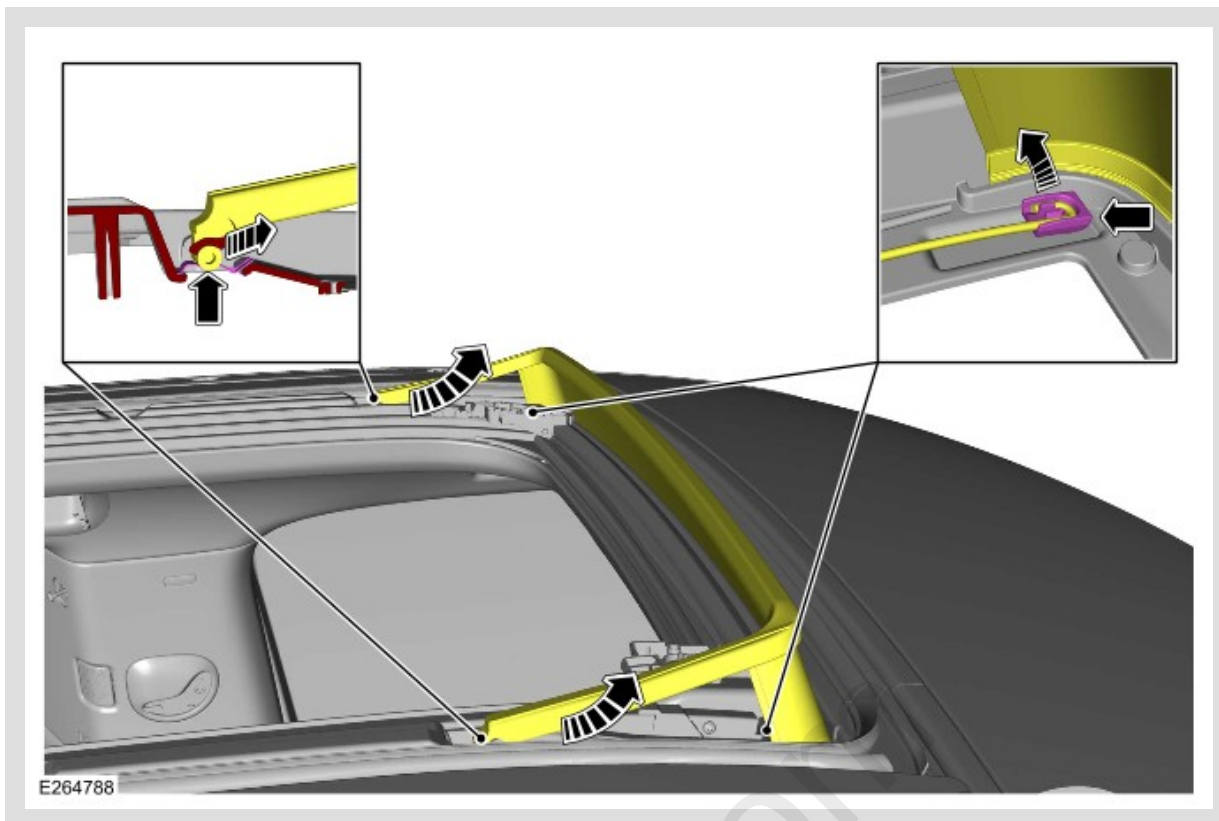


- Release the 2 springs from the 2 clips.
- Release the air deflector frame from the 2 retainers as illustrated.

3.

⚠ CAUTION:


Take extra care not to damage the component.

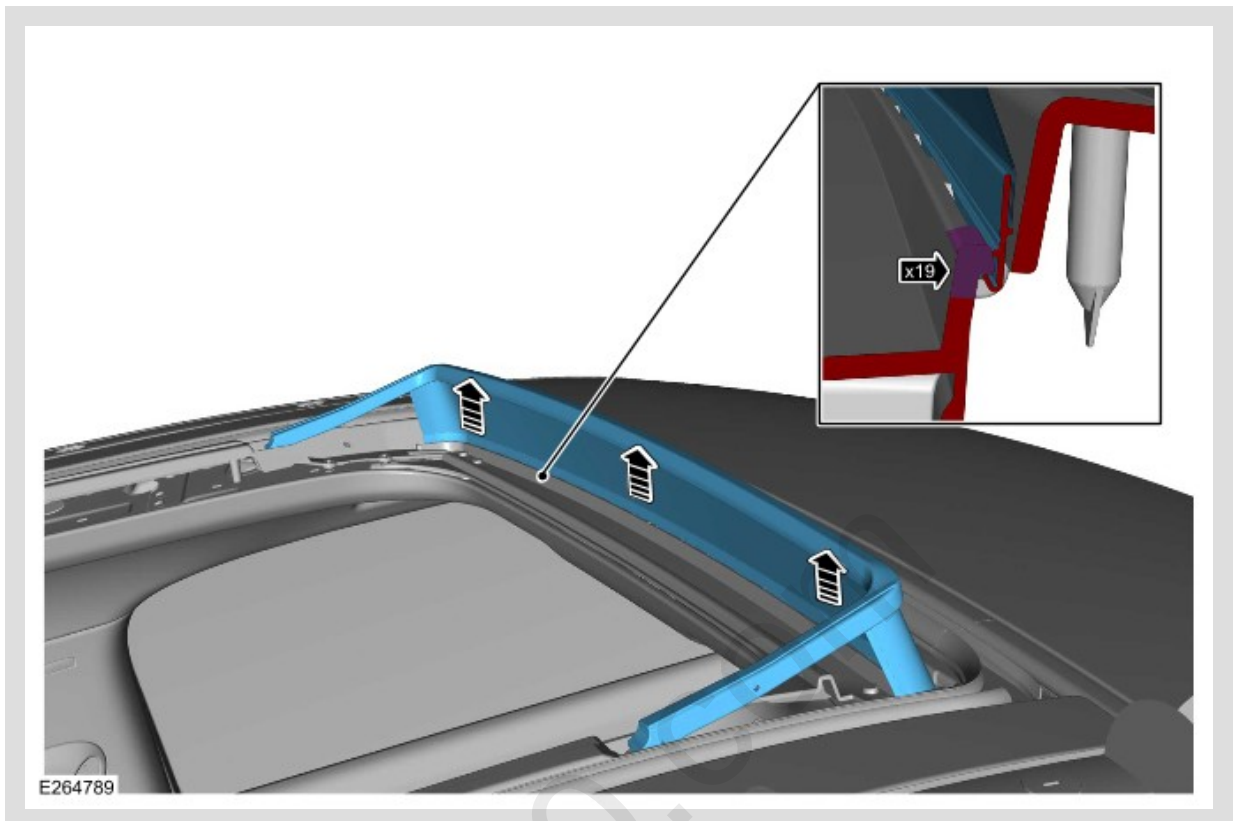

- Use a suitable plastic tool, release the net from the 19 clips.
- Remove the canvas roof air deflector.

 NOTES:

- If a new component will be install.
- Repeat this step for the other side.

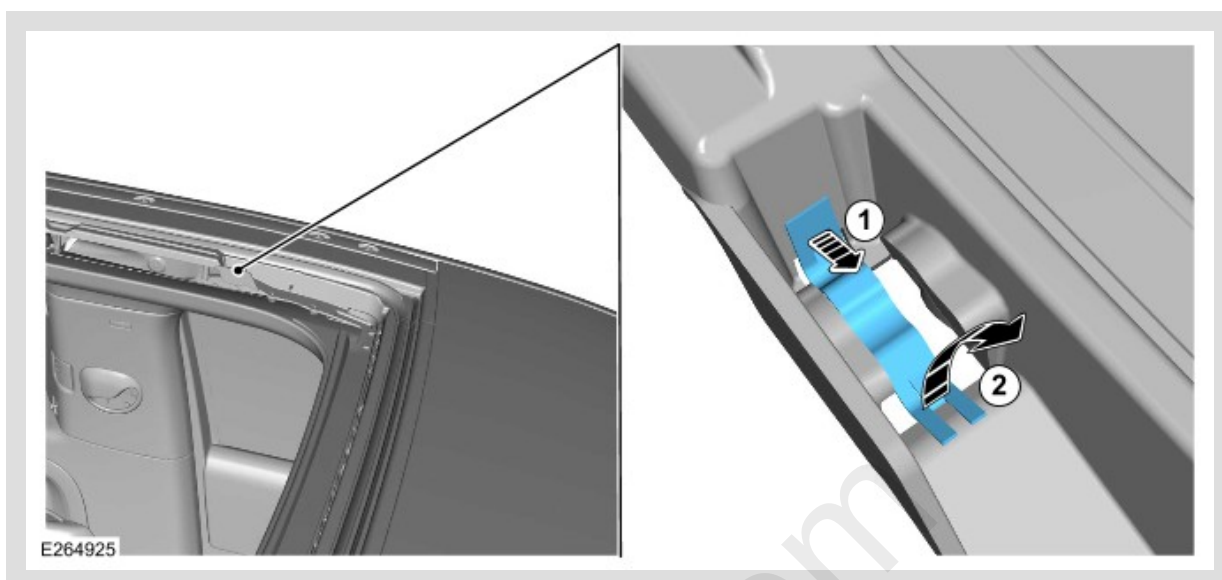

Remove the canvas roof air deflector bearing as illustrated.

INSTALLATION

1.



NOTE:

If a new component will be install.

Install the 2 canvas roof air deflector bearings.

2.



CAUTION:

Take extra care not to damage the component.

- Install the canvas roof air deflector.
- Use a suitable plastic tool, install the net to the 19 clips.

3.

- Install the air deflector frame to the 2 retainers.
- Install the 2 springs to the 2 clips.

4.

Test the functionality of the air deflector by hand first.

5.

Close the canvas roof.