

PUBLISHED: 19-NOV-2019
2020.0 DEFENDER (LE), 501-20A

SEATBELT SYSTEM

THIRD ROW SEATBELT BUCKLE (G2413302)

mcx30.com

REMOVAL


 NOTE:

- This procedure contains illustrations showing certain components removed to provide extra clarity.
- This procedure contains some variation in the illustrations depending on the vehicle specification, but the essential information is always correct.

1. Remove the third row seat.


Refer to: [Third Row Seat](#) (501-10 Seating, Removal and Installation).

- 2.

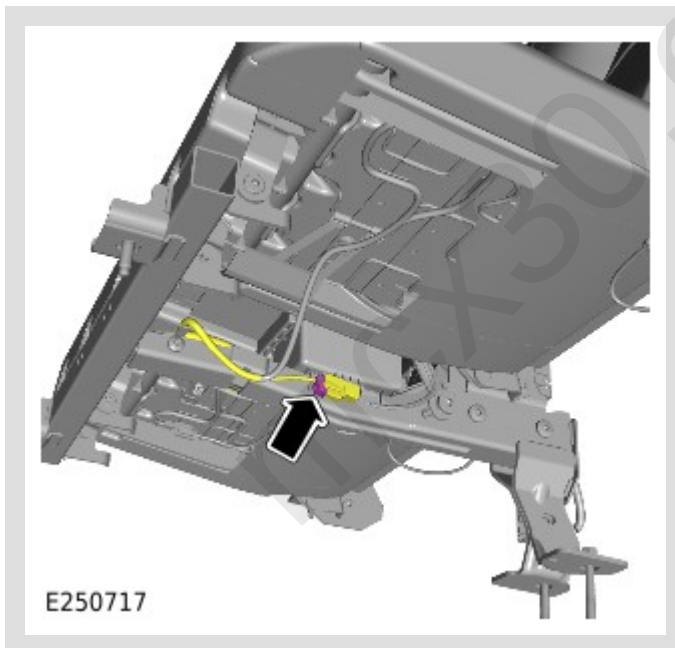

Disconnect the electrical connector.

3.

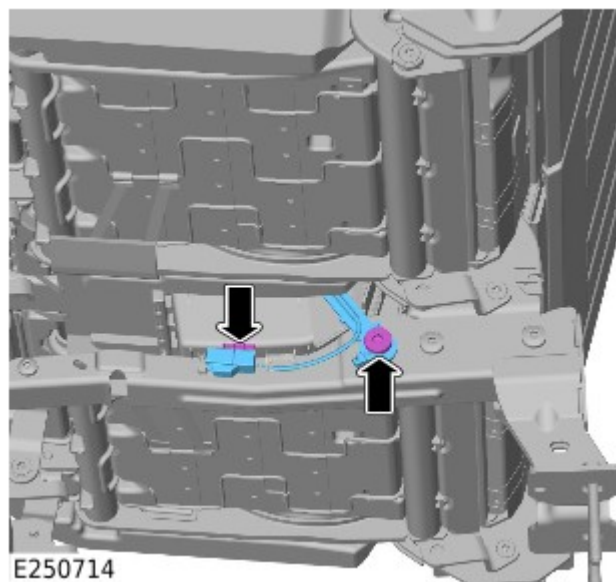

- Release the clip.
- Remove the bolt.

4.



Remove the third row seatbelt buckle.

INSTALLATION

1.

- Install the third row seatbelt buckle.
- Tighten the bolt.
Torque: 40Nm
- Install the clip.

2.

Connect the electrical connector to the third row seatbelt buckle.

3.

Install the third row seat.

Refer to: [Third Row Seat](#) (501-10 Seating, Removal and Installation).