

2022 CHEVROLET CORVETTE SERVICE MANUAL


- **SEARCH**

1. **Body Hardware and Trim**
2. **Interior Trim and Paneling**
3. **Repair Instructions**
- 4.

Front Side Door Armrest Switch Mount Plate Replacement - Driver Side


Removal Procedure

1. Remove the front side door trim. Front Side Door Trim Replacement
2. [Click here for full size](#)
3. Front Side Door Speaker Cover Bracket Bolt (1) >> Remove [2>x]
4. Front Side Door Speaker Cover Bracket (2>) >> Remove

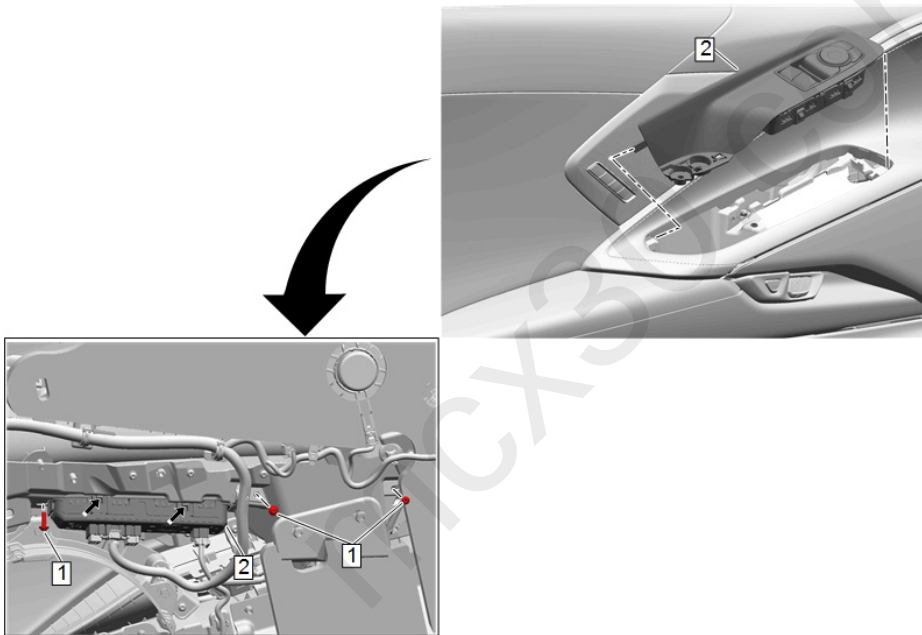

5. [Click here for full size](#)
6. Front Side Door Trim Bolt (1) >> Remove [3>x]
7. Using a flat bladed plastic trim tool, start at the front of the front side door armrest switch plate (2) and gently insert trim tool to lift the armrest switch mount plate (2) from the door trim.
8. Rotate the armrest switch mount plate (2) up and forward to unhook the rear retaining feature.
9. Disconnect all electrical connectors.
10. Front Side Door Armrest Switch Mount Plate (2>) >> Remove
11. Transfer components as necessary.

Installation Procedure

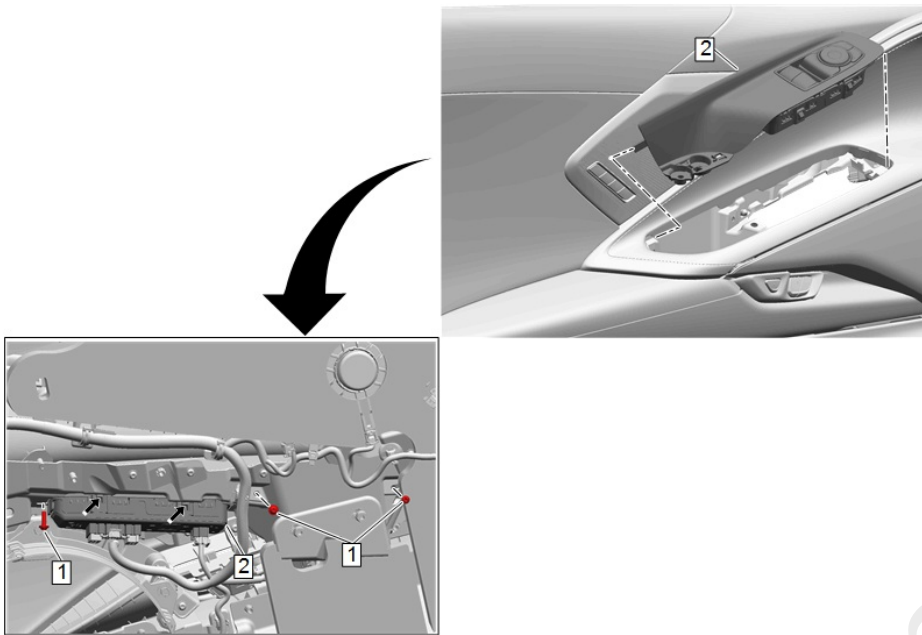

1. [Click here for full size](#)
2. Front Side Door Armrest Switch Mount Plate (2>) >> Install
3. Connect all electrical connectors.
4. Caution:
Refer to Fastener Caution.
5. Front Side Door Trim Bolt (1) >> Install [3>x]1 N-m (9 lb in)
6. [Click here for full size](#)
7. Front Side Door Speaker Cover Bracket (2>) >> Install
8. Front Side Door Speaker Cover Bracket Bolt (1) >> Install [2>x]2.5 N-m (22 lb in)
9. Install the front side door trim. Front Side Door Trim Replacement