

2022 CHEVROLET CORVETTE SERVICE MANUAL

- [SEARCH](#)

1. [Roof](#)
2. [Removable Top](#)
3. [Repair Instructions](#)
- 4.


Roof Lift Off Panel Replacement

Removal Procedure


Caution:

Perform the following procedures before removing or installing the roof lift off panel to help avoid damage.


- Park the vehicle on a level service.
- Shift the automatic transmission into PARK.
- Shift a manual transmission into REVERSE or FIRST gear.
- Set the parking brake firmly.
- Lower the side windows.
- Turn the ignition key OFF

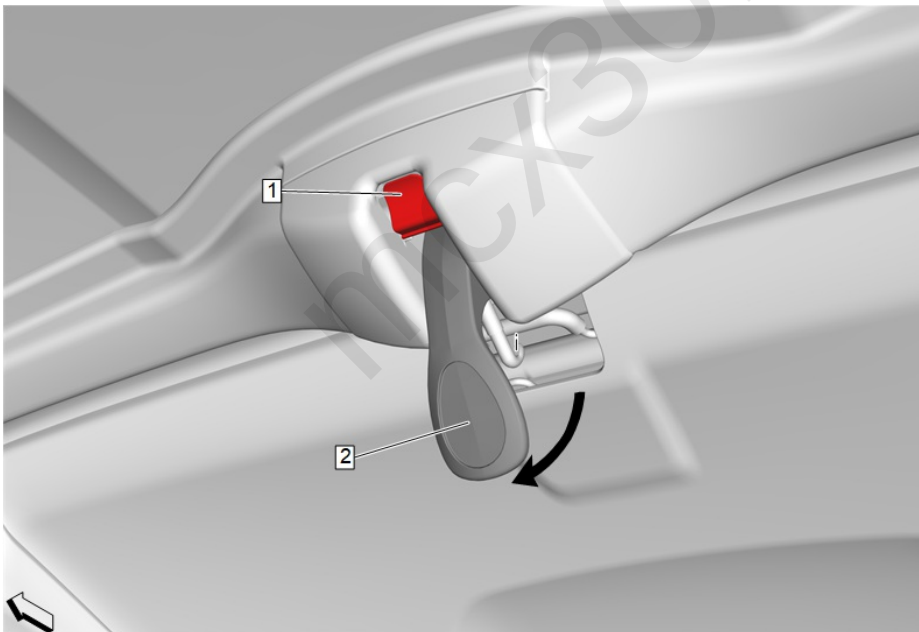


1.
Click here for full size
2. Depress the rear latch release button (1) and rotate the roof lift off panel/window rear latch (2) down and forward, ensuring the latch clamp has released.

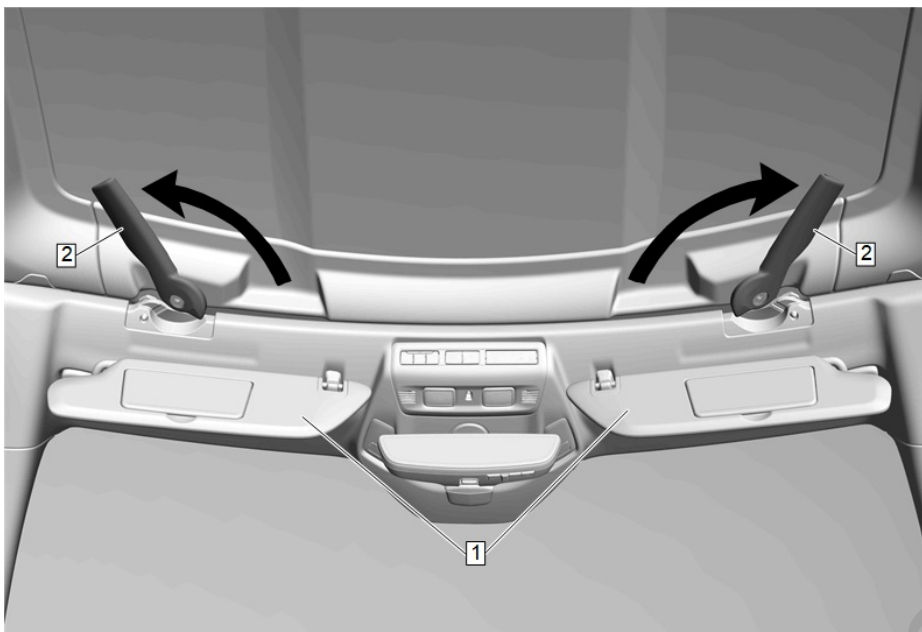

3. [Click here for full size](#)
4. Place each sunshade (1) in the downward position to access the front latches.
5. Pull down the roof lift off panel/window latch handles (2) and rotate each handle outward.

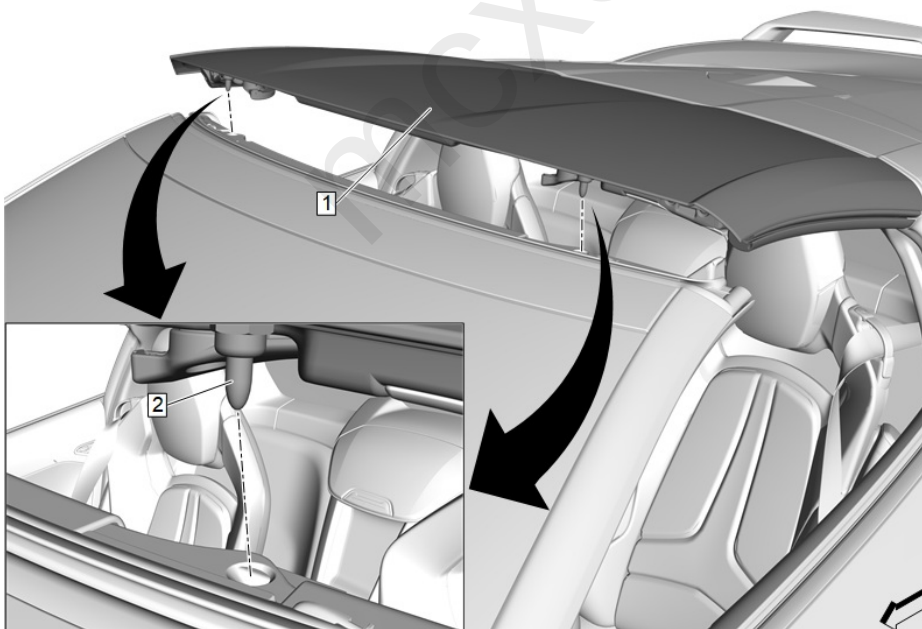

6. [Click here for full size](#)
7. Lift the front of the roof lift off panel (1) to disengage the roof lift off panel locating pins (2).

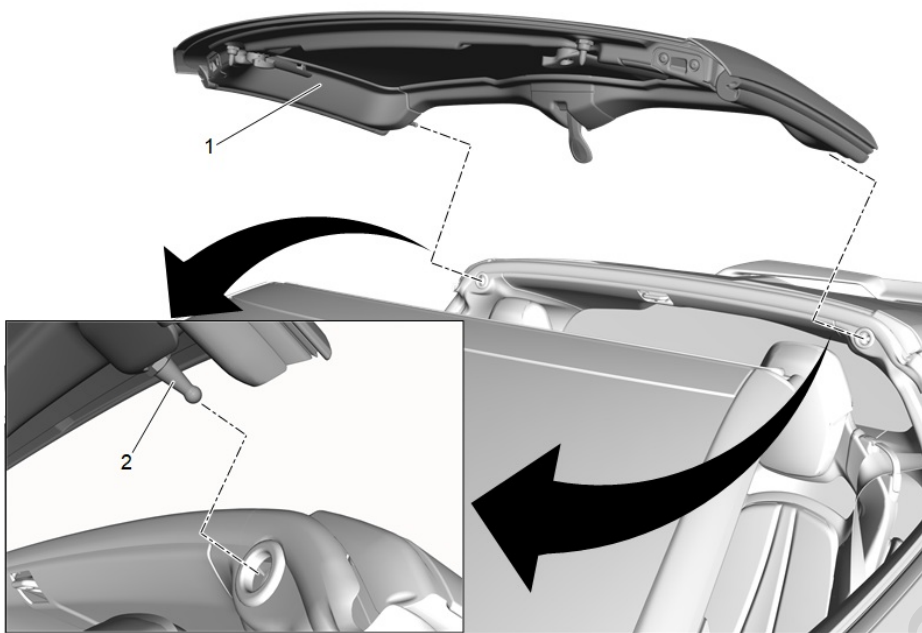


8. [Click here for full size](#)

9. Note:


Observe the location of the rubber grommets mounted around the rear locating pin receiver access holes. The grommet may be uninstalled when the roof lift off panel is removed. Ensure the grommet is properly mounted before installing the roof lift off panel.

10. Slide the roof lift off panel (1) forward to disengage the roof lift off panel locating pins (2).
11. Remove the roof lift off panel (1), and place on a cleaned prepared surface.
12. Transfer components as necessary.


Installation Procedure

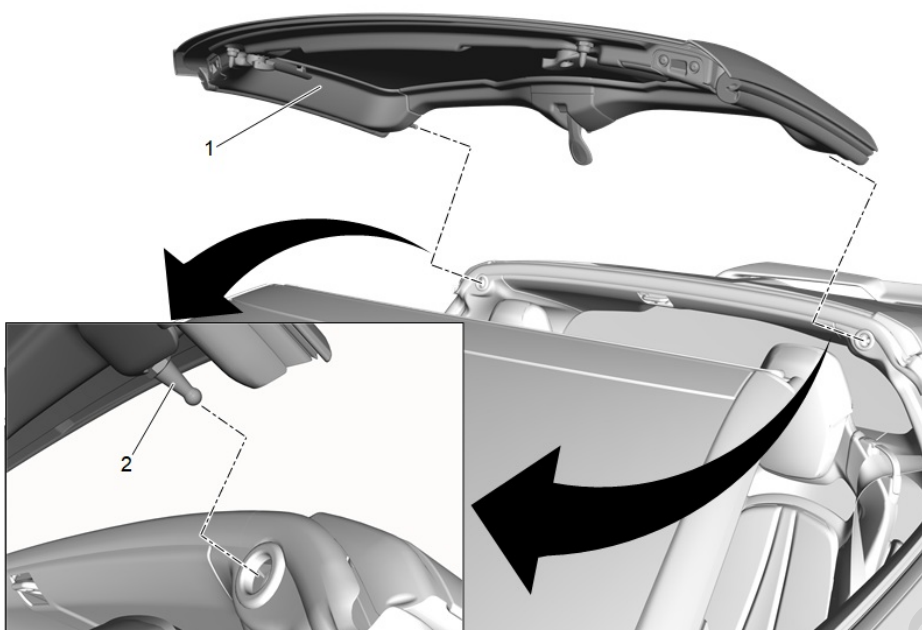

1. [Click here for full size](#)
2. Slide the roof lift off panel (1) rearward to engage the roof lift off panel locating pins (2).

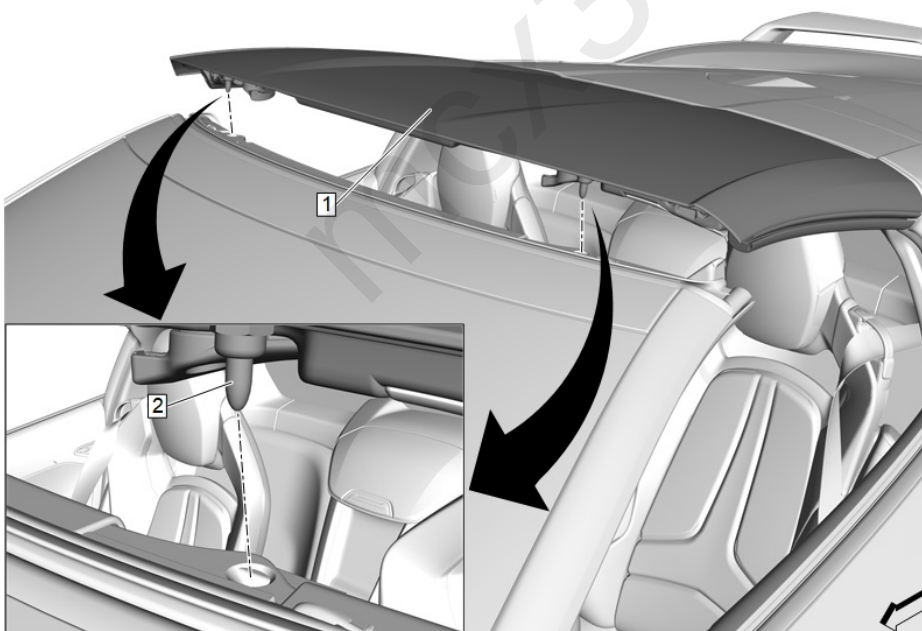

3. [Click here for full size](#)
4. Gently lower the roof lift off panel (1) and engage the roof lift off panel locating pins (2).
5. Adjust the roof lift off panel. Roof Lift Off Panel Adjustment.

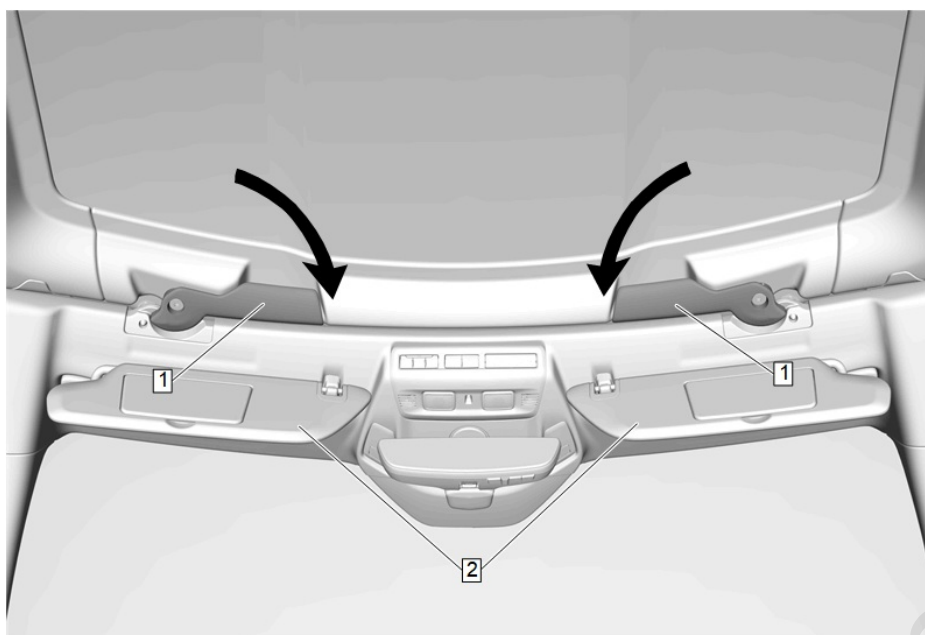


6. [Click here for full size](#)

7. Note:

There will not be an audible click, but the latches will firmly fit in place by detent.

8. Rotate the roof lift off panel/window latch handles (1) inward until full travel is reached.
9. Place each sunshade (2) back to its proper upright position.

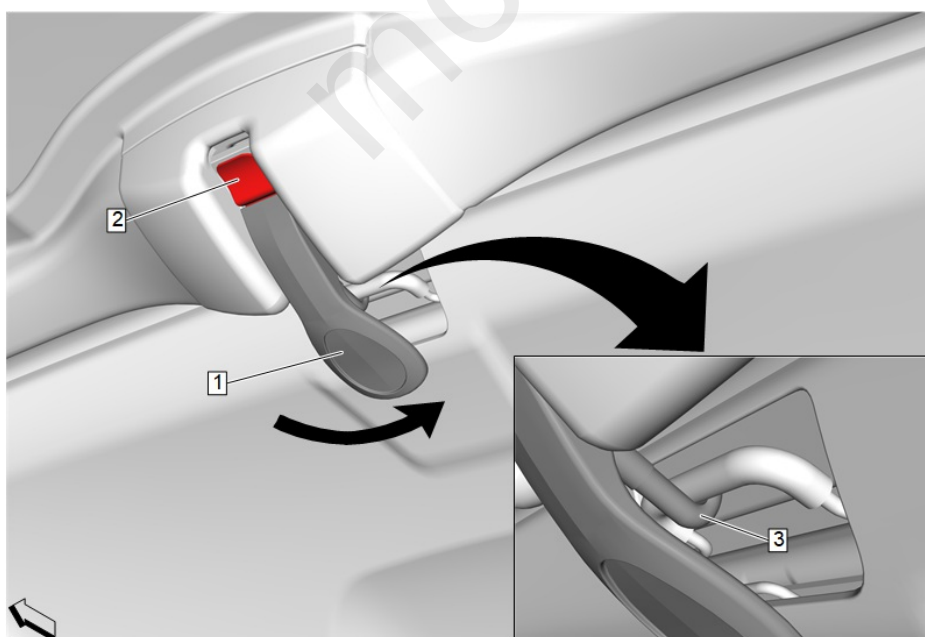

10. [Click here for full size](#)

11. Note:

- Ensure the latch clamp is aligned to the roof lift off panel rear striker before engaging latch.
 - There will be an audible click from the rear latch release button, identifying that the latch has locked.
12. Engage the latch clamp (3) and firmly secure the roof lift off panel/window rear latch (1) upward to the fully closed position.
 13. If additional adjustments are required, repeat installation step 3.

mcx30.com