

2022 CHEVROLET CORVETTE SERVICE MANUAL

- SEARCH


1. Seats

2. Seat Hardware, Trim, and Upholstery

3. Repair Instructions

- 4.

Front Seat Adjuster Replacement

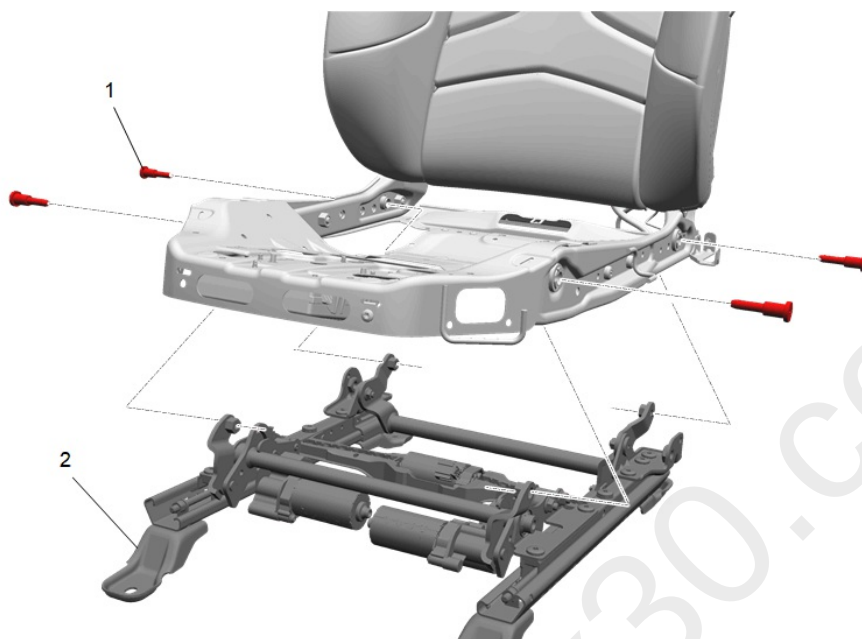

[Click here for full size](#)

Front Seat Cushion Cover and Pad Replacement

Fastener Caution.

Procedure

1. Remove the front seat adjuster bolts.
2. If NEW threaded components are being installed, loosen the adhesive using a metal pick or similar tool before proceeding. If threaded components are reused, prepare the threaded components using the following steps:
 1. Remove any loose cured adhesive from the external threads of the components using a lint free cloth.
 2. Thread the cleaned components into the internal mating threads and remove to loosen trapped cured adhesive.
 3. Apply thread locking adhesive to the external threads of the components.
- 3.

Adhesives, Fluids, Lubricants, and Sealers

- Ensure there are no gaps in the thread locking adhesive once applied to the component.

Tighten

25 N-m (18 lb ft)

Callout	Component Name
Preliminary Procedure	
Remove the front seat cushion cover and pad as an assembly. It is not necessary to separate them.	
1	Front Seat Adjuster Bolt [4x] Caution: Refer to
2	Front Seat Adjuster Procedure 1. Disconnect and reposition harness as necessary. 2. Transfer components as necessary.

mcx30.com