

2022 CHEVROLET CORVETTE SERVICE MANUAL


- **SEARCH**

1. **Suspension**
2. **Suspension Controls**
3. **Repair Instructions**
- 4.


Electronic Suspension Wheel Front Vertical Accelerometer Replacement

Removal Procedure

1. Raise and support the vehicle. Lifting and Jacking the Vehicle
2. Front Compartment Insulator >>> Remove - Front Compartment Insulator Replacement
3. Remove the front tire and wheel assembly. Tire and Wheel Removal and Installation

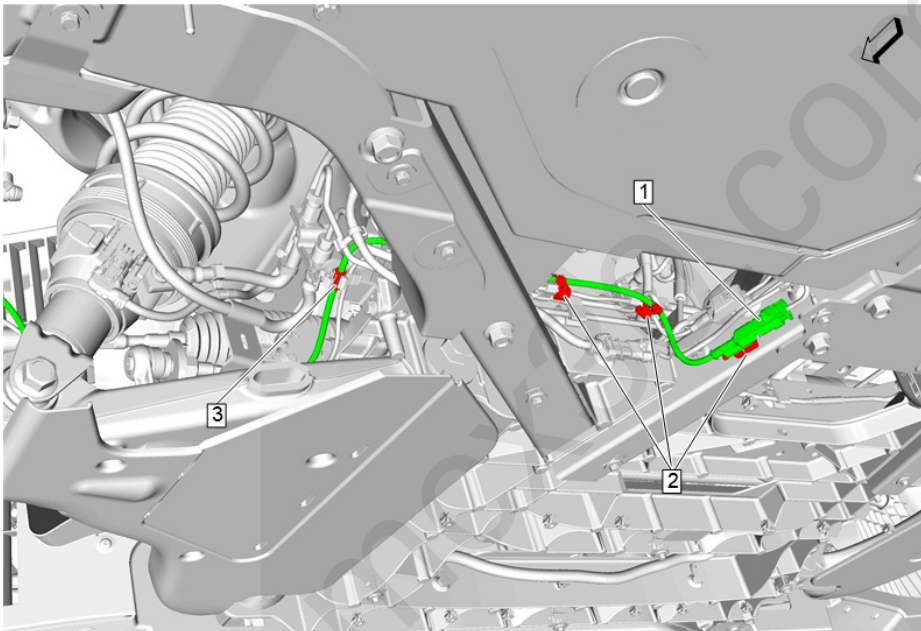

4. [Click here for full size](#)
5. Disconnect the electronic suspension wheel front vertical accelerometer electrical connector (1).
6. Unclip the electronic suspension wheel front vertical accelerometer from the 3 retainers (2).
7. Remove the electronic suspension wheel front vertical accelerometer grommet (3) from the retainer.

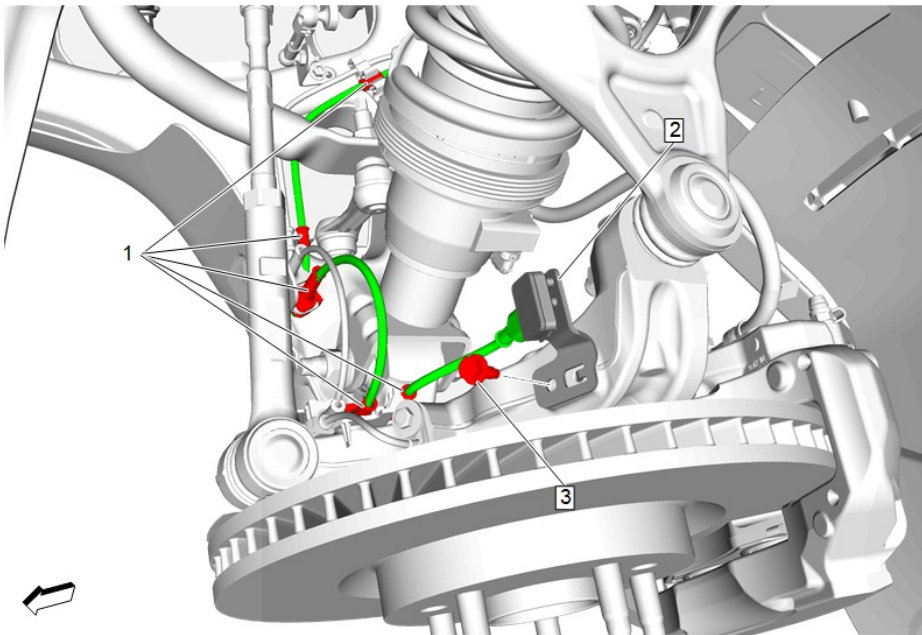

8.


[Click here for full size](#)

9. Remove the 5 electronic suspension wheel front vertical accelerometer grommets (1) from the retainers.

10. Electronic Suspension Front Vertical Accelerometer Bolt (3) >> Remove

11. Electronic Suspension Wheel Front Vertical Accelerometer (2) >> Remove


Installation Procedure

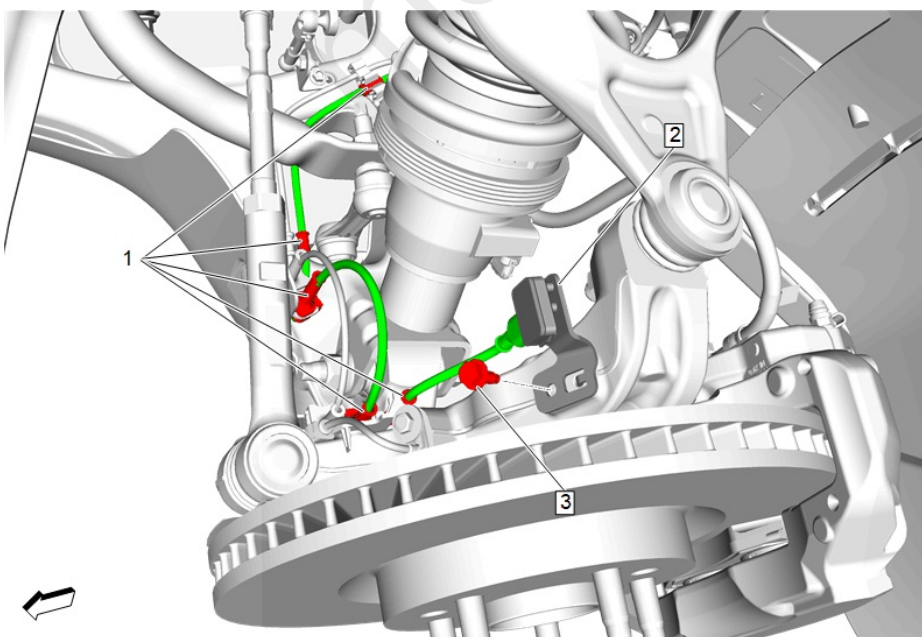

1.

[Click here for full size](#)

2. Electronic Suspension Wheel Front Vertical Accelerometer (2) >> Install
3. Caution:
Refer to Fastener Caution.
4. Electronic Suspension Front Vertical Accelerometer Bolt (3) >> Install and tighten 9 N-m (80 lb in)
5. Install the 5 electronic suspension wheel front vertical accelerometer grommets (1) to the retainers.

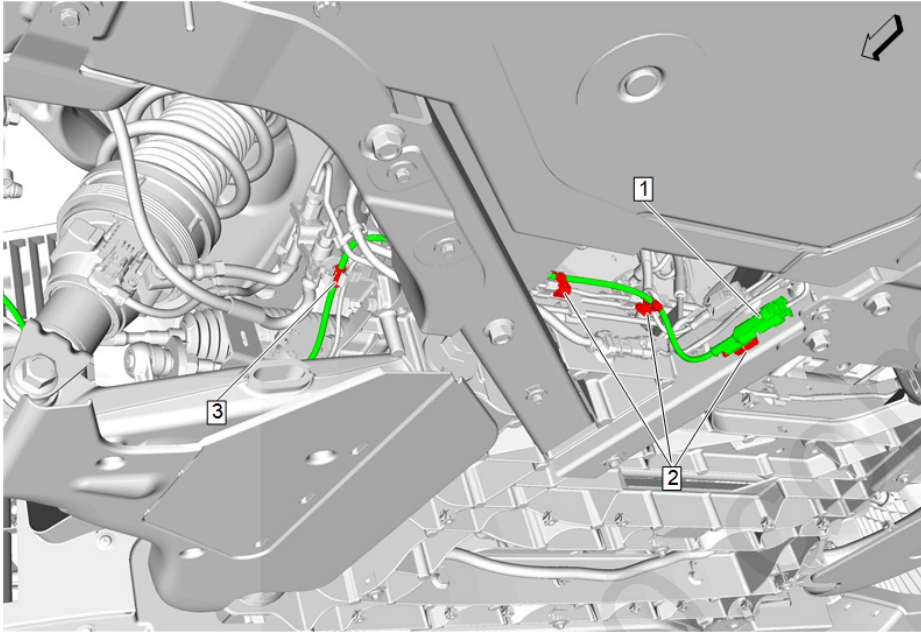

6.
[Click here for full size](#)
7. Install the electronic suspension wheel front vertical accelerometer grommet (3) to the retainer.
8. Clip the electronic suspension wheel front vertical accelerometer to the 3 retainers (2).
9. Connect the electronic suspension wheel front vertical accelerometer electrical connector (1).
10. Install the front tire and wheel assembly. Tire and Wheel Removal and Installation
11. Front Compartment Insulator >> Install - Front Compartment Insulator Replacement
12. Remove the support and lower the vehicle.
13. Clear DTCs