

2022 CHEVROLET CORVETTE SERVICE MANUAL

- **SEARCH**

1. **Brakes**
2. **Hydraulic Brakes**
3. **Repair Instructions**
- 4.

Rear Brake Pipe Replacement - Left Side

Warning:

The battery must be disconnected to prevent the brake master cylinder from pressurizing the hydraulic system during its automated self diagnostic tests that can possibly occur when a door is opened or the key transmitter is activated. Failure to follow this precaution may cause personal injury.

Warning:


Refer to Brake Fluid Irritant Warning.

Caution:


Refer to Brake Fluid Effects on Paint and Electrical Components Caution.

Removal Procedure

1. Disconnect the battery negative cable. Battery Negative Cable Disconnection and Connection

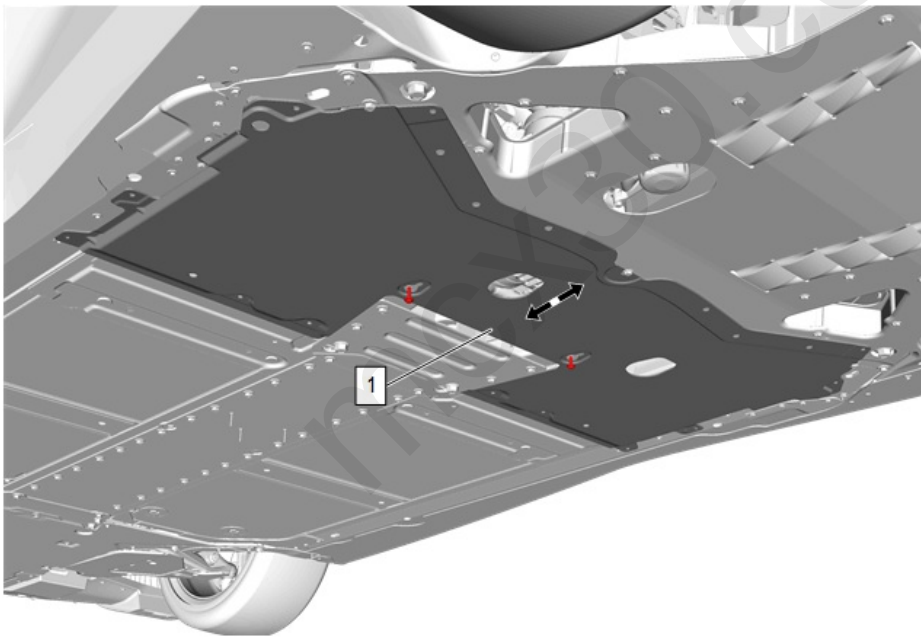


2. [Click here for full size](#)
3. Underbody Rear Air Deflector (1) >> Remove - Underbody Rear Air Deflector Replacement

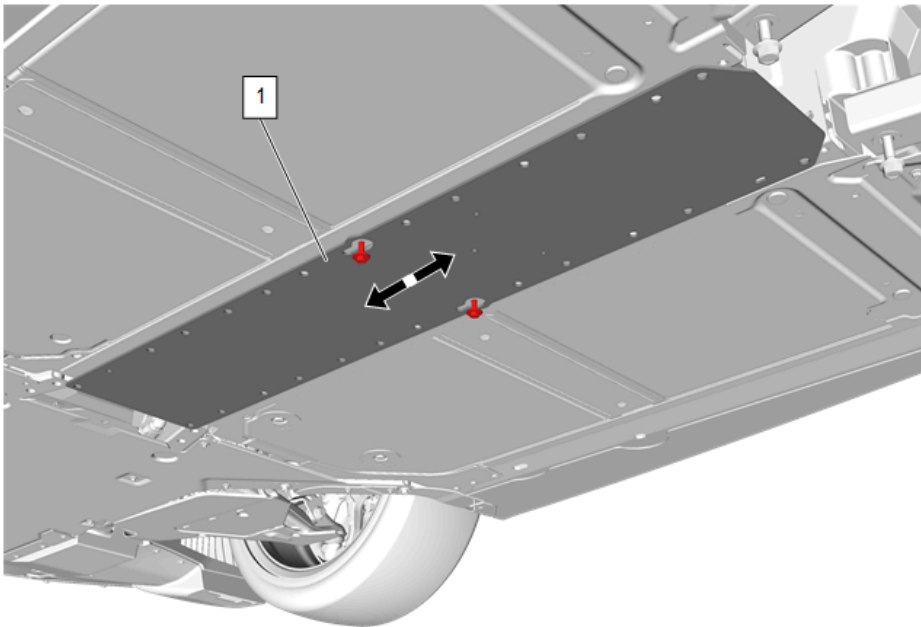

4. [Click here for full size](#)

5. Floor Panel Tunnel Panel Front Reinforcement (1) >> Remove - Floor Panel Tunnel Panel Front Reinforcement Replacement - Mid-Tunnel

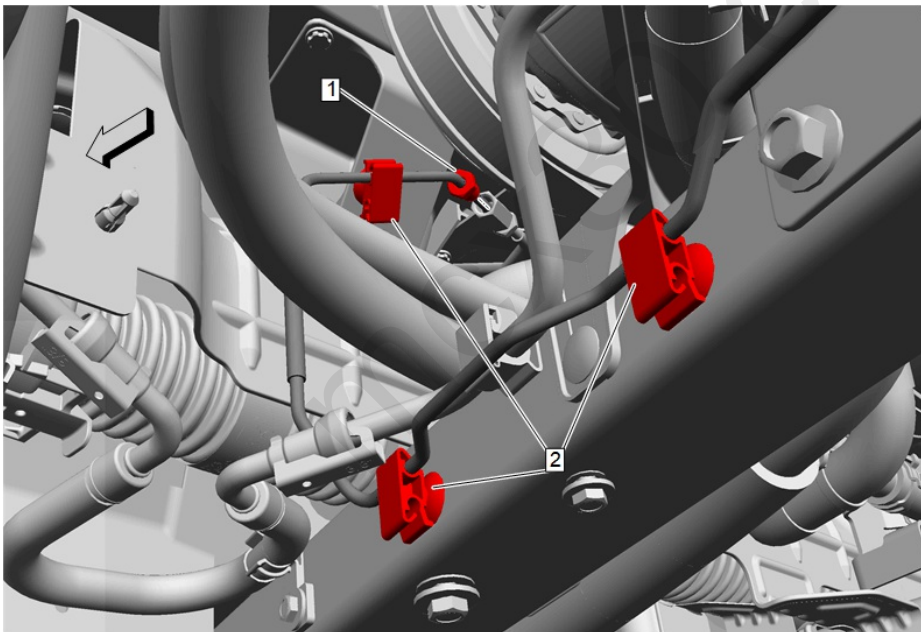


6. [Click here for full size](#)

7. Retainer (2) >> Release [3x]


8. Rear Brake Pipe Nut (1) >> Remove

9. Plug the brake pipe union inlet port to prevent brake fluid loss and contamination.

10. Cap the rear brake pipe to prevent brake fluid loss and contamination.

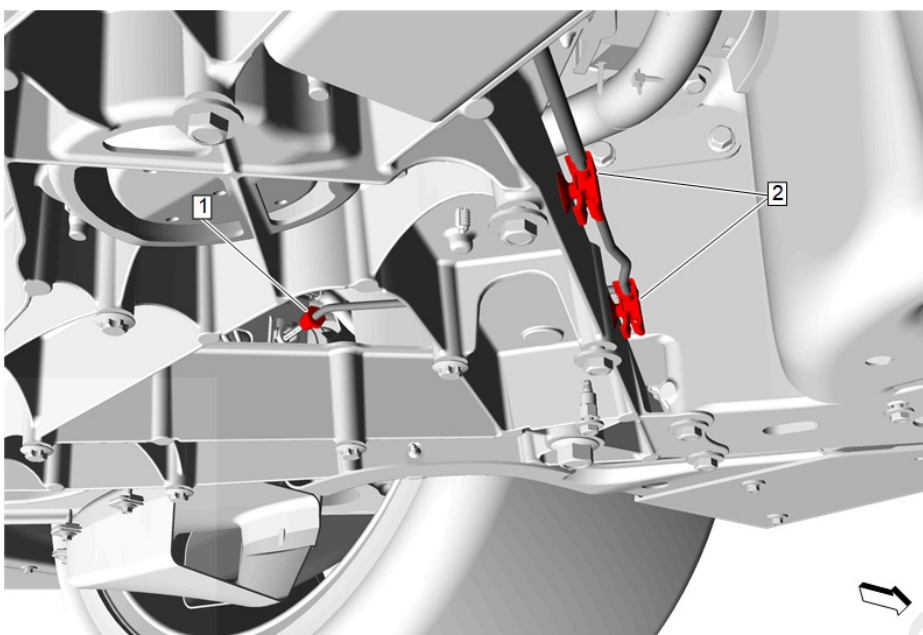


11. [Click here for full size](#)
12. Retainer (2) >> Release [2x]
13. Rear Brake Pipe Nut (1) >> Remove
14. Plug the rear brake hose inlet port to prevent brake fluid loss and contamination.
15. Cap the rear brake pipe to prevent brake fluid loss and contamination.

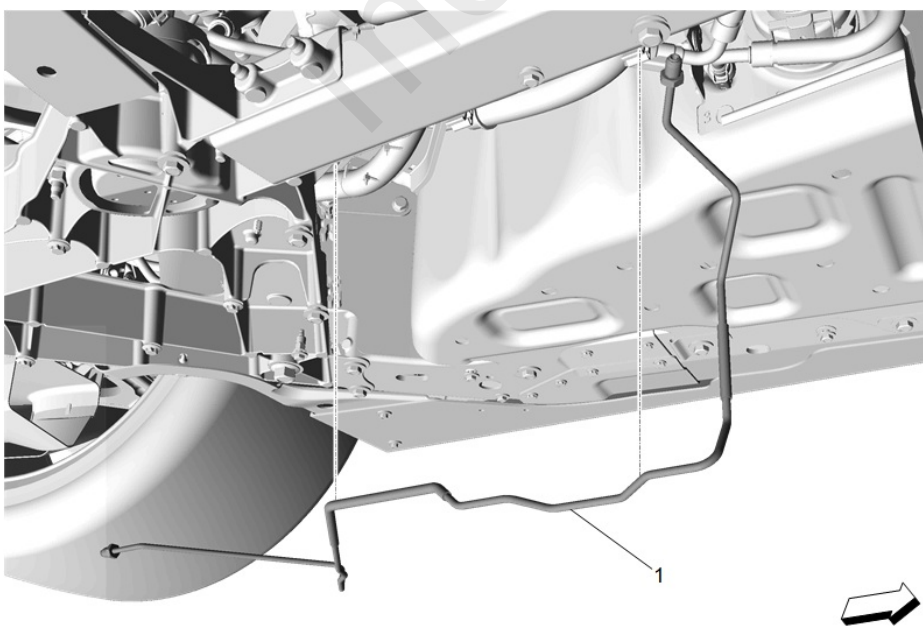


16. [Click here for full size](#)

17. Maneuver the rear brake pipe (1) out from under the vehicle.

Installation Procedure

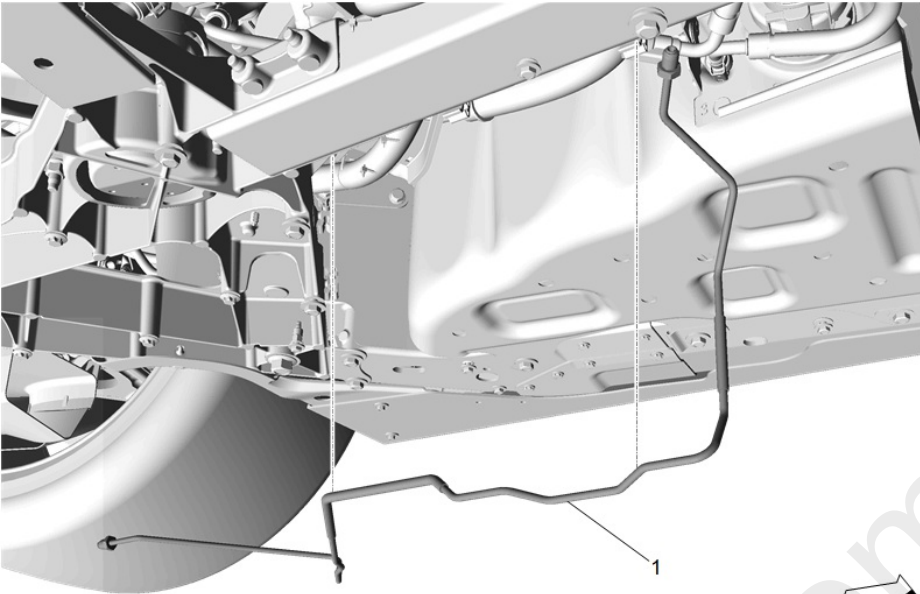

1.
[Click here for full size](#)
2. Maneuver the rear brake pipe (1) into the underbody of the vehicle.

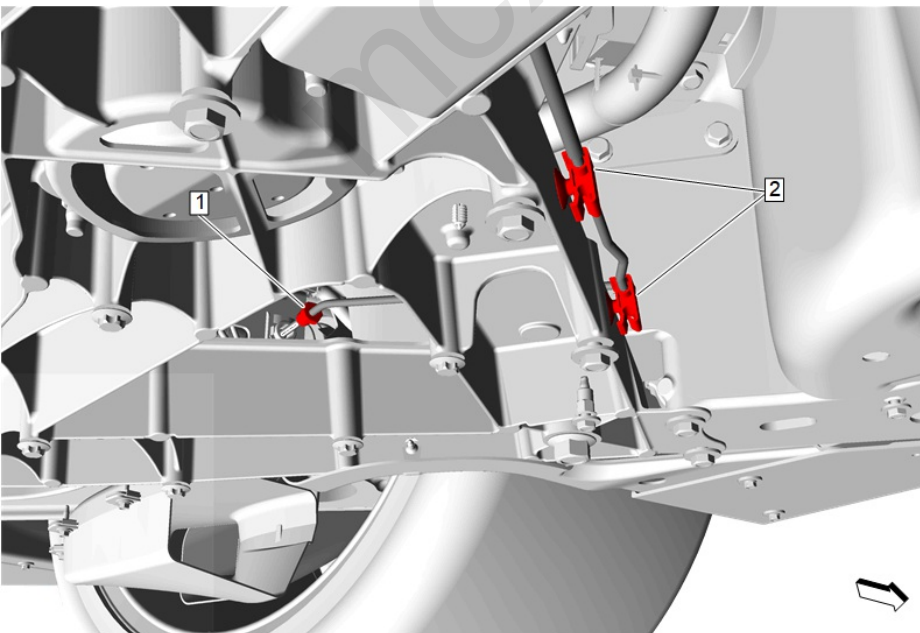

3.
[Click here for full size](#)
4. Retainer (2) >> Secure [2x1]

10. Retainer (2) >> Secure [3x]


5. Remove the cap from the rear brake pipe.

6. Remove the plug from the rear brake hose inlet port.

7. Caution:

Refer to Fastener Caution.

8. Rear Brake Pipe Nut (1) >> Install and tighten 18 N-m (13 lb ft)

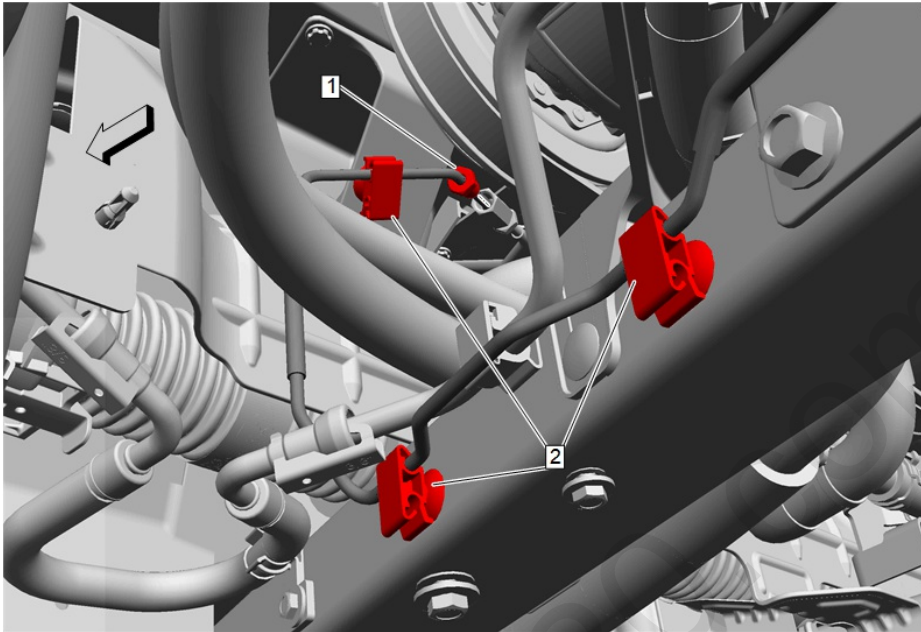

9.
[Click here for full size](#)

10. Retainer (2) >> Secure [3x]

11. Remove the cap from the rear brake pipe.


12. Remove the plug from the brake pipe union inlet port.

13. Rear Brake Pipe Nut (1) >> Install and tighten 18 N-m (13 lb ft)


14. Connect the battery negative cable. Battery Negative Cable Disconnection and Connection

15. Bleed the brake system. Hydraulic Brake System Bleeding

16. Inspect for fluid leaks.

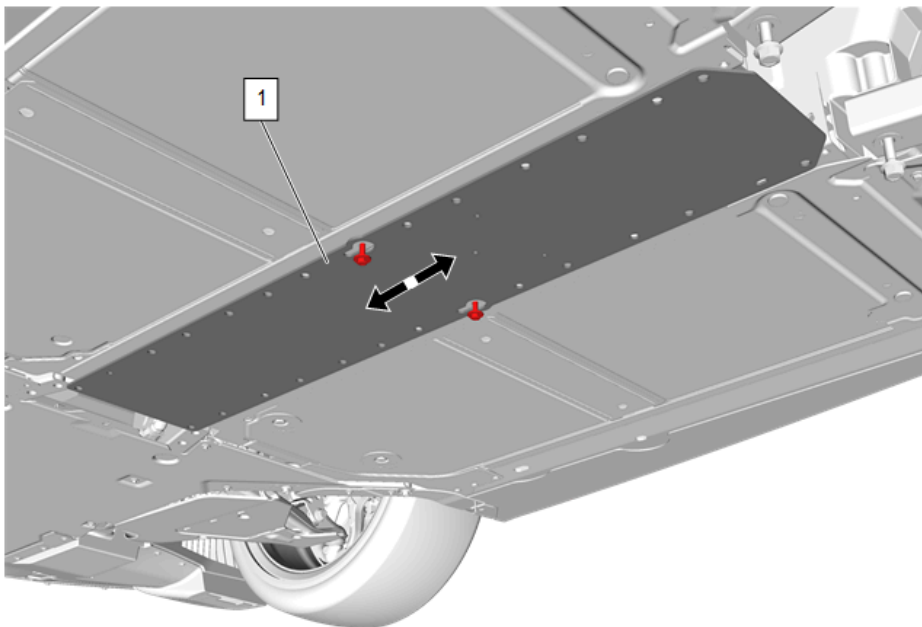

17. [Click here for full size](#)
18. Floor Panel Tunnel Panel Front Reinforcement (1) >> Install - Floor Panel Tunnel Panel Front Reinforcement Replacement - Mid-Tunnel

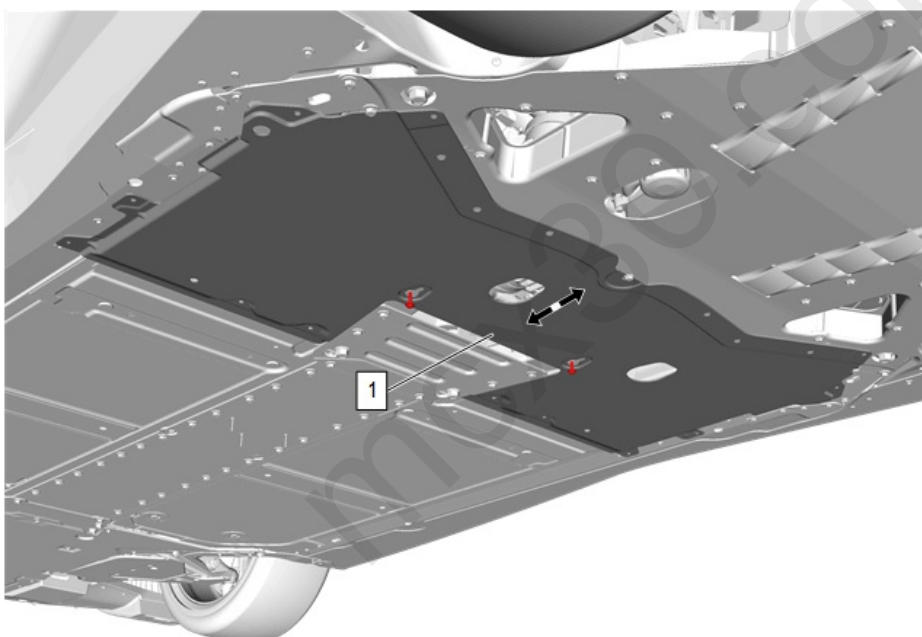

19. [Click here for full size](#)
20. Underbody Rear Air Deflector (1) >> Install - Underbody Rear Air Deflector Replacement