


2022 CHEVROLET CORVETTE SERVICE MANUAL

- SEARCH

- 1. Engine/Propulsion
- 2. Engine Controls and Fuel - 6.2L (LT2)
- 3. Repair Instructions
- 4.

Spark Plug Wire Replacement - Left Side

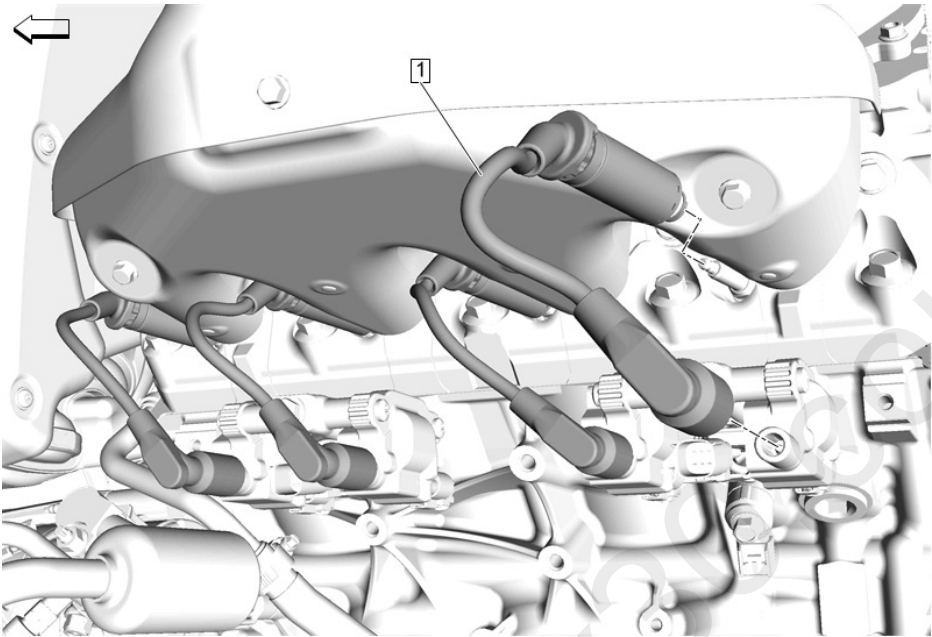

[Click here for full size](#)
[Underbody Rear Air Deflector Replacement](#)
[Adhesives, Fluids, Lubricants, and Sealers](#)

Callout	Component Name
Preliminary Procedure	
1	Spark Plug Wire [4>x] Note: • Pull only on the spark plug wire boot to remove the wire. • To ensure the spark plug wire rubber boots are correctly seated during installation, push the boot onto the ignition coil until two audible clicks are heard, and push the rubber boot onto the spark plug until one audible click is heard. Procedure 1. Twist the spark plug wire boot 1/2 turn and remove the spark plug wire. 2. Inspect the spark plug wire for damage and replace if necessary. 3. Inspect the inside of the spark plug rubber boot for a thin, even coat of grease. If there is no grease present or additional grease is necessary, apply a thin coating of dielectric grease evenly to the inside of the spark plug rubber boot up to a depth of 15 mm from the end of the boot.