


[2009 Chevrolet Equinox](#) | [Equinox, Torrent \(VIN L\) Service Manual](#) | [Driver Information and Entertainment](#) | [Secondary and Configurable Customer Controls](#) | [Specifications](#) | **Document ID: 1771943**

Fastener Tightening Specifications

Application	Specification	
	Metric	English
Steering Column Trim Cover Screws	2 N·m	18 lb in


Steering Wheel Control Switch Assembly Replacement (Equinox)

Removal Procedure

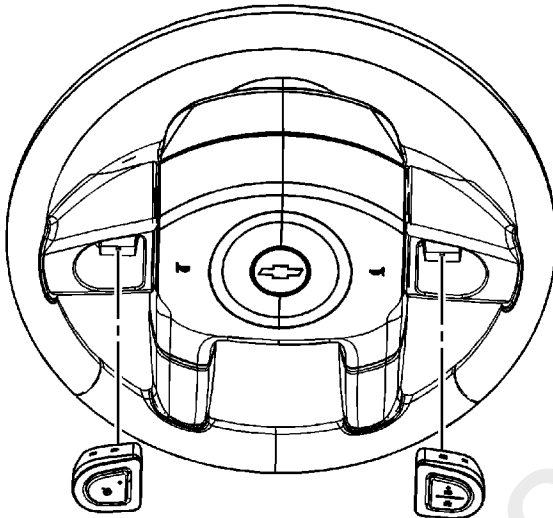

1. Use a small flat-bladed tool to release the switch assembly from the steering wheel.
2. Disconnect the cruise switch electrical harness connector from the switch.

Installation Procedure

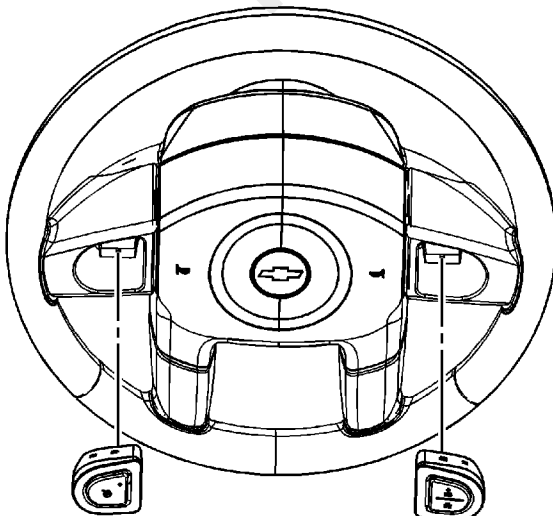


© 2010 General Motors Corporation. All rights reserved.



1. Connect the switch electrical harness connector to the switch. Push in the connector until a click is heard and pull back to confirm a positive engagement.
2. Insert the cruise switch into the steering wheel and gently apply pressure to fasten the switch in the opening.

mcx30.com

Steering Wheel Control Switch Assembly Replacement (Torrent)

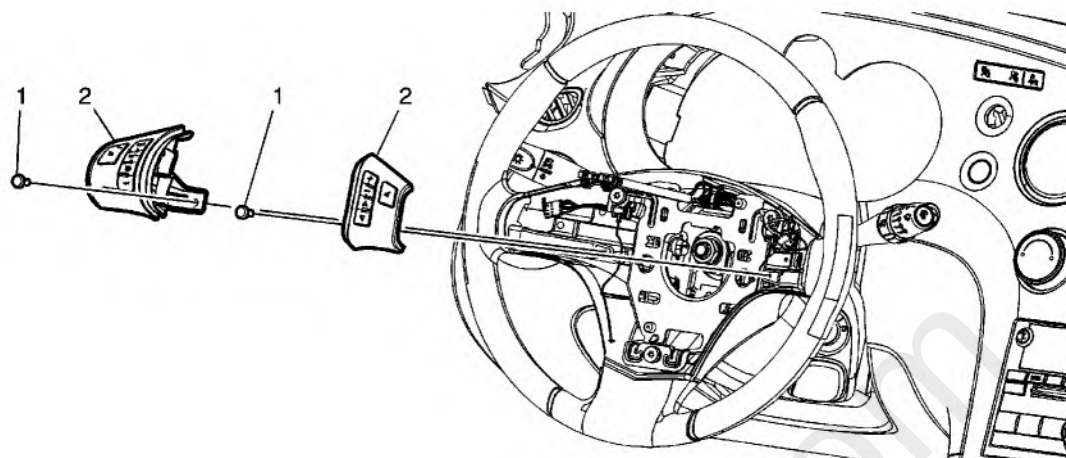

Callout	Component Name
Preliminary Procedure	
Remove the inflatable restraint steering wheel module. Refer to Steering Wheel Inflatable Restraint Module Replacement .	
1	Steering Wheel Control Assembly Screw Caution: Refer to Fastener Caution in the Preface section. Tighten 2 N·m (18 lb in)
2	Steering Wheel Control Assembly