

2010 ENGINE

Engine Mechanical - 2.8L, 3.0L, 3.2L, or 3.6L - Repair Instructions - On Vehicle - Equinox & Terrain

DRIVE BELT REPLACEMENT

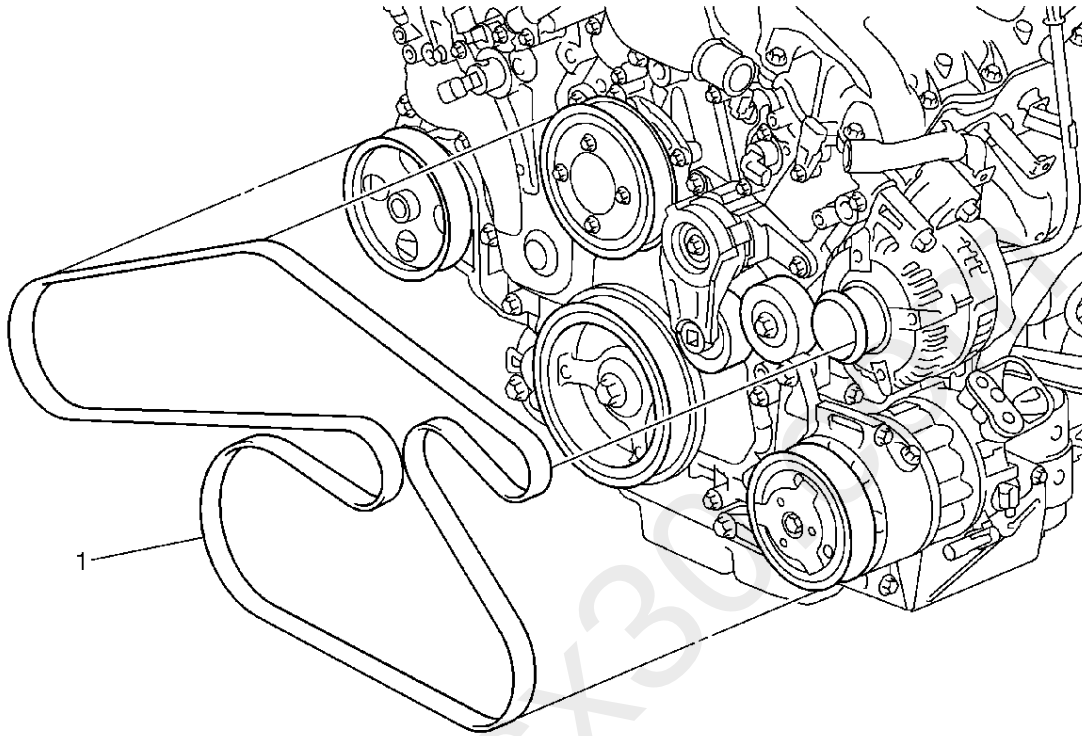


Fig. 1: Drive Belt Routing

Courtesy of GENERAL MOTORS CORP.

Callout	Component Name
Preliminary Procedures: Remove the engine mount bracket. Refer to <u>Engine Mount Bracket Replacement - Right Side</u>	
1	Drive Belt Procedure 1. Rotate the drive belt tensioner clockwise to release the drive belt tension. 2. Slide the drive belt off of the belt idler pulley. 3. Slowly release the drive belt tensioner.

DRIVE BELT TENSIONER REPLACEMENT