

2018 ACCESSORIES & EQUIPMENT

Active Noise Cancellation - Equinox & Terrain

SPECIFICATIONS

FASTENER SPECIFICATIONS

Reusable Threaded Fastener Tightening Specifications

NOTE:

All fasteners listed in this table can be reused after removal.

Application	Specification
	Metric (English)
Radio Speaker Amplifier Bolt	2.5 N.m (22 lb in)
Radio Speaker Amplifier Nut	6 N.m (53 lb in)

SCHEMATIC WIRING DIAGRAMS

ACTIVE NOISE CANCELLATION WIRING SCHEMATICS

Active Noise Cancellation Module Power, Ground and Serial Data (NKC with UZ6 without IOR)

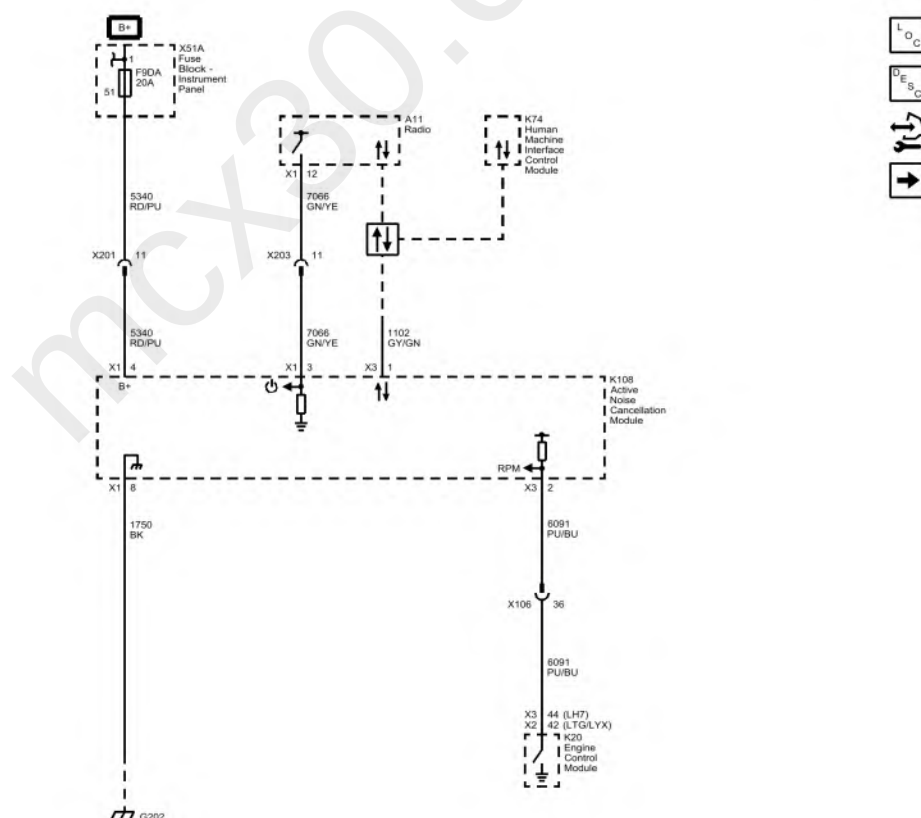


Fig. 1: Active Noise Cancellation Module Power, Ground and Serial Data (NKC with UZ6 without IOR).

Courtesy of GENERAL MOTORS COMPANY

Active Noise Cancellation Microphones (NKC with UZ6 without IOR)