

2018 ACCESSORIES & EQUIPMENT

Luggage Rack And Roof Trim - Equinox & Terrain

SPECIFICATIONS

FASTENER SPECIFICATIONS

Reusable Threaded Fastener Tightening Specifications

NOTE:

All fasteners listed in this table can be reused after removal.

Application	Specification
	Metric (English)
Luggage Carrier Side Rail Nut	9 N.m (80 lb in)

REPAIR INSTRUCTIONS

LUGGAGE CARRIER SIDE RAIL REPLACEMENT

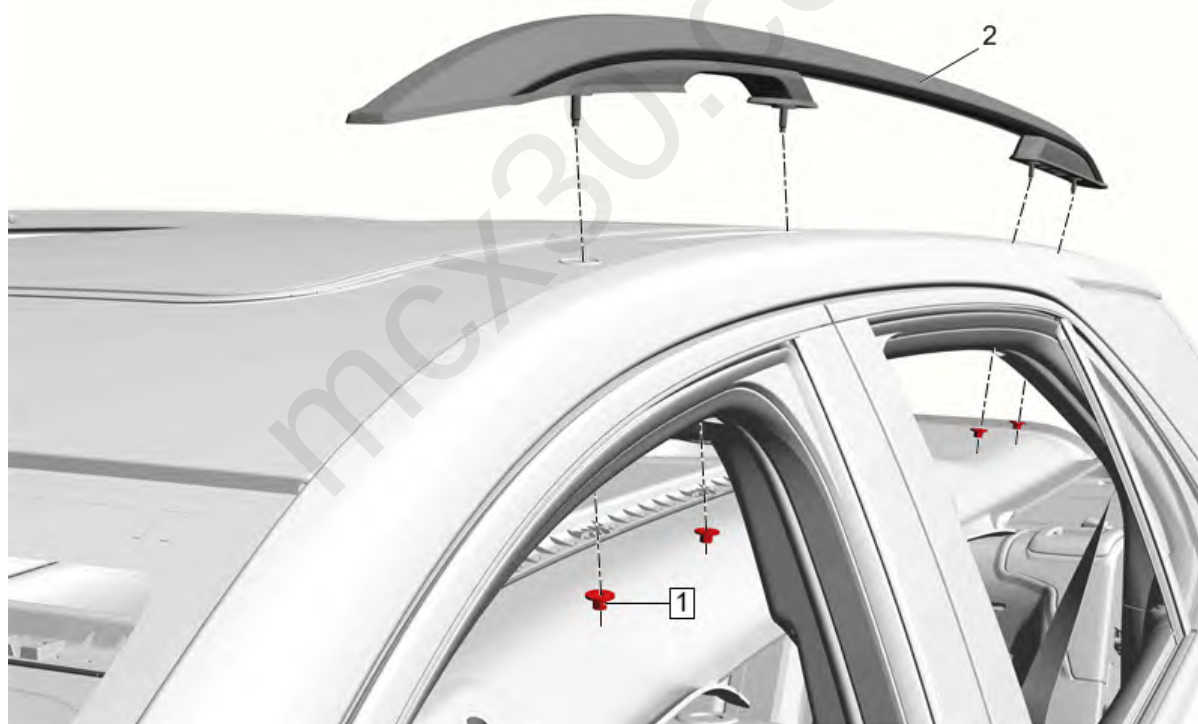


Fig. 1: Luggage Carrier Side Rail

Courtesy of GENERAL MOTORS COMPANY

Callout	Component Name
Preliminary Procedure	
It is only necessary to lower the headliner. Only do those steps in the headliner replacement procedure that will lower the headliner enough to gain access to the part. Headlining Trim Panel Replacement	

Callout	Component Name
1	Luggage Carrier Side Rail Nut [4x] CAUTION: <u>Component Fastener Tightening Caution</u> Tighten 9 N.m (80 lb in)
2	Luggage Carrier Side Rail Procedure 1. Transfer components as necessary. 2. Water test the vehicle for leaks on the side of the vehicle that the side rail was replaced, install the headliner. 3. Verify the sunroof is operating properly.

mcx30.com