

2017 ACCESSORIES & EQUIPMENT

Luggage Rack and Roof Trim - Encore, Trax

SPECIFICATIONS

FASTENER SPECIFICATIONS

Reusable Threaded Fastener Tightening Specifications

NOTE:

All fasteners listed in this table can be reused after removal.

Application	Specification
	Metric (English)
Luggage Carrier Side Rail Nut	8 N.m (71 lb in)

REPAIR INSTRUCTIONS

LUGGAGE CARRIER SIDE RAIL REPLACEMENT (CHEVROLET)

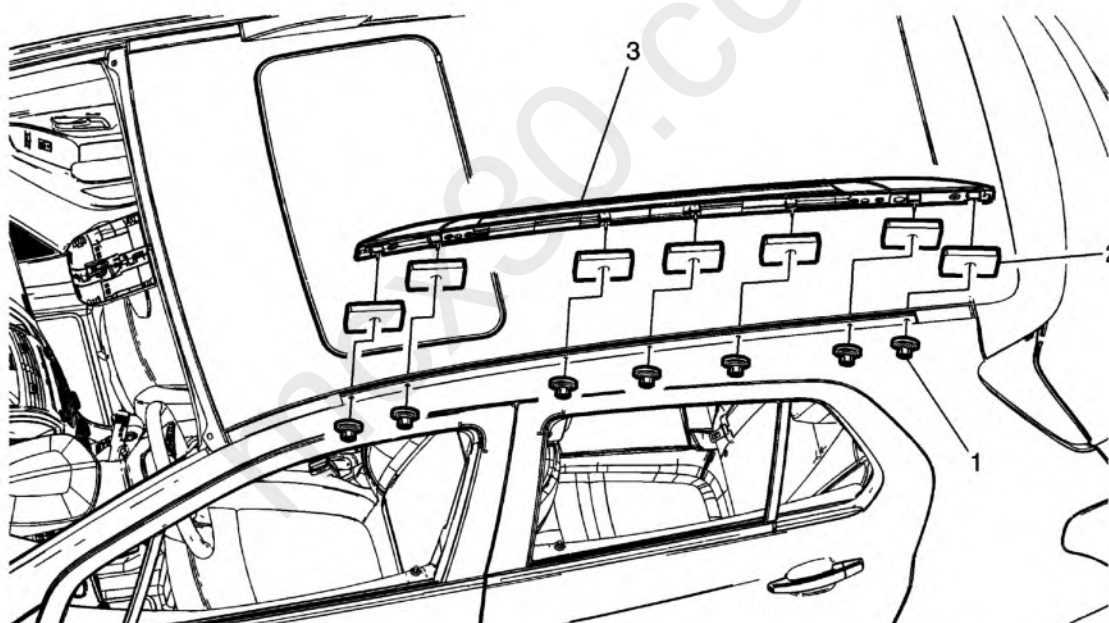


Fig. 1: Luggage Carrier Side Rail (Trax)

Courtesy of GENERAL MOTORS COMPANY

Callout	Component Name
Preliminary Procedure It is only necessary to lower the headliner. Only perform the steps in the headliner replacement procedure that will lower the headliner enough to gain access to the part. Refer to Headlining Trim Panel Replacement (With Sunroof, Chevrolet) Headlining Trim Panel Replacement (Without Sunroof, Chevrolet) .	

Callout	Component Name
1	Luggage Carrier Side Rail Nuts (Qty: 7) CAUTION: Refer to <u>Fastener Caution</u> . Tighten 8 N.m (71 lb in)
2	Luggage Carrier Side Rail Seal to Roof (Qty: 7) Procedure It maybe necessary to transfer the seals located on the luggage carrier rail studs to the new luggage carrier rail studs. This seal prevents water leakage from around the stud.
3	Luggage Carrier Side Rail