

Removal and Installation

mcx30.com


Active Noise Control Microphone

Removal

1. Lower the headliner.
Refer to: Headliner - Lowering (501-05 Interior Trim and Ornamentation, Removal and Installation).
2. **NOTE:** For active noise cancellation microphone bezel installation issues see headliner removal and installation.

Release the tabs and remove the ANC microphone.

- Disconnect the electrical connector.

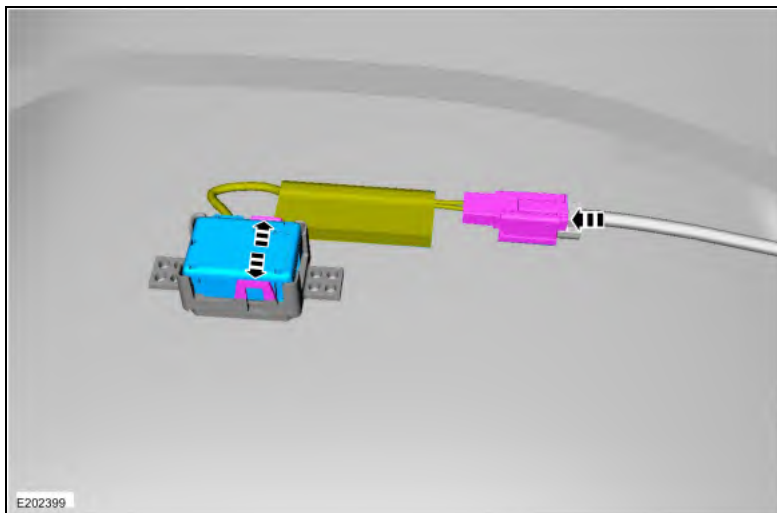

Installation

1. To install, reverse the removal procedure.