



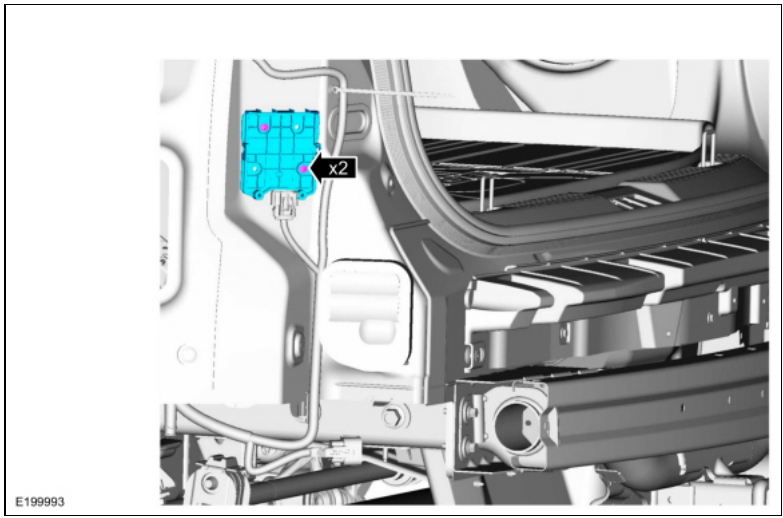

Side obstacle detection control module bracket

5. Remove the SODL or SODR.
6. If required.
Remove the screws and the SODL or SODR bracket.

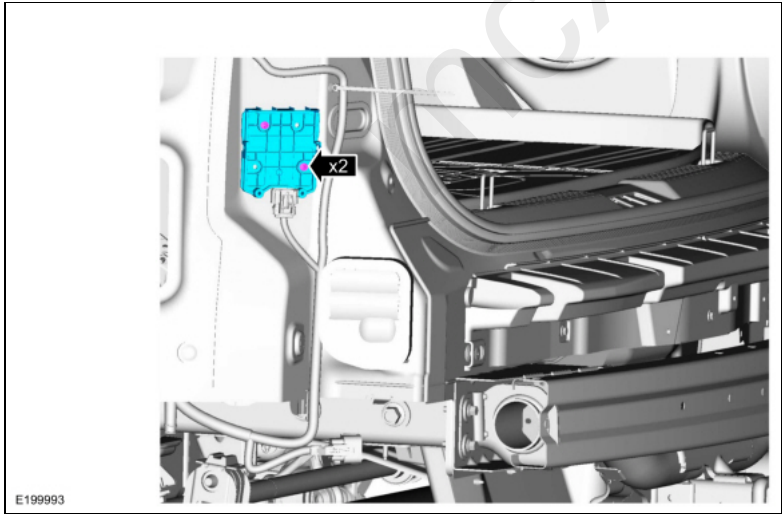

Installation

1. To install, reverse the removal procedure.
2. **NOTE:** Carry out this step only if a SODL or SODR is being replaced.
Using a diagnostic scan tool, complete the PMI process for the SODL or SODR following the on-screen instructions.