


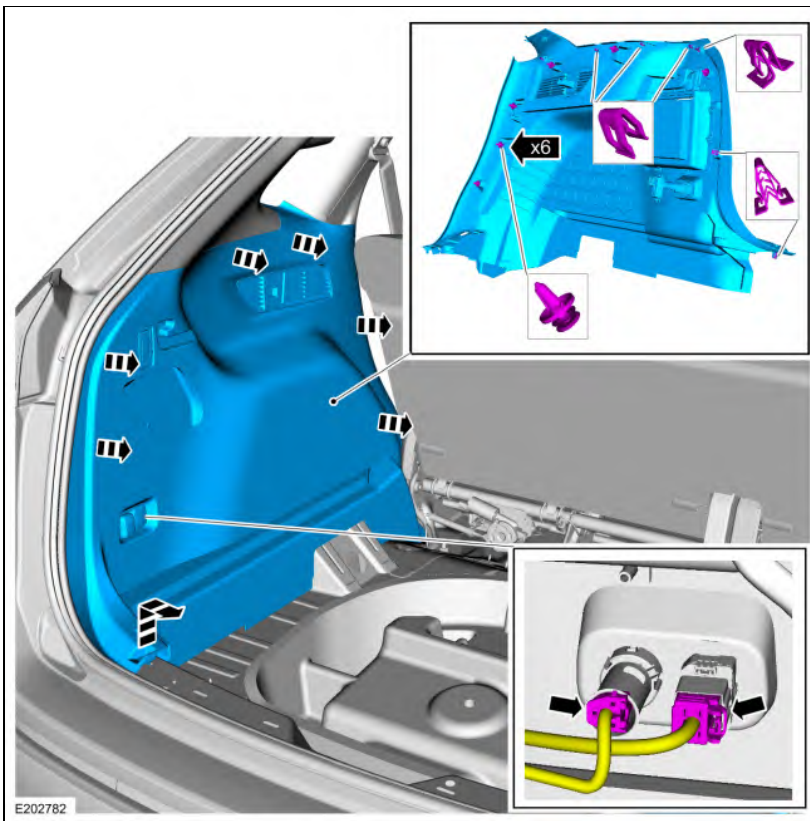

Installation

1. To install, reverse the removal procedure.

Loadspace Trim Panel Cargo Net Hook

Special Tool(s) / General Equipment


Flat Headed Screw Driver
Interior Trim Remover

Removal


NOTE: LH shown, RH similar.

NOTE: Removal steps in this procedure may contain installation details.

1. Open the loadspace trim panel cargo net hook.

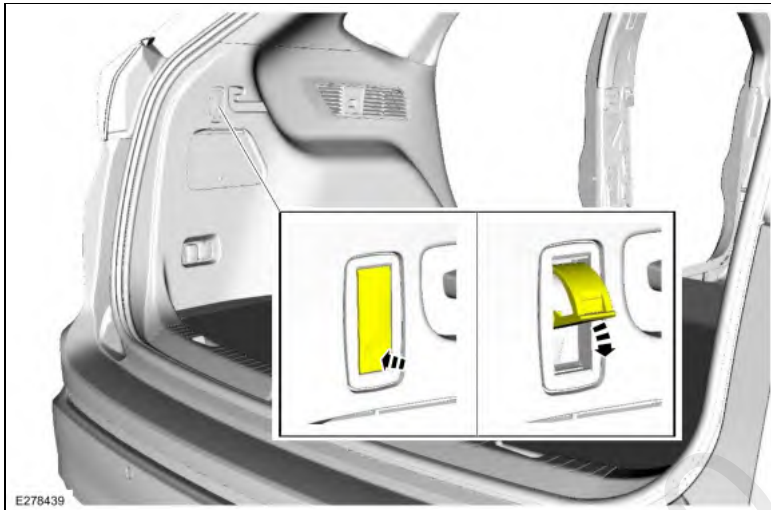

2. Release the loadspace trim panel cargo net hook lower tabs.
 1. Inset the screwdriver in the lower portion of the loadspace trim panel cargo net hook.
Use the General Equipment: Flat Headed Screw Driver
 2. Pry the loadspace trim panel cargo net hook upward.

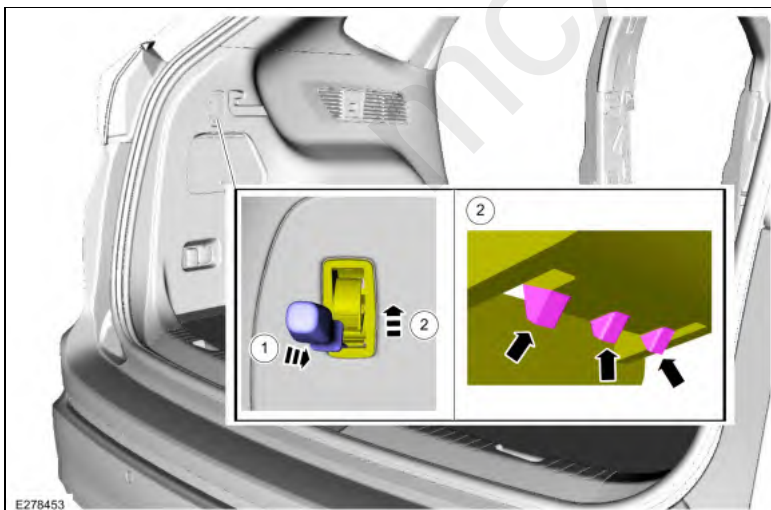

3. **NOTE:** During installation an audible click will be heard when the lower tabs are fully seated in the loadspace trim panel.

Remove the loadspace trim panel cargo net hook.

1. Pry outward on the lower portion of the loadspace trim panel cargo net hook.
Use the General Equipment: Interior Trim Remover
2. Rotate loadspace trim panel cargo net hook downward and outward.



Installation

- 1. To install, reverse the removal procedure.

mcx30.com