

Roof Opening Panel Track Cleaning

Materials

Name	Specification
Door Latch Lubricant 5U7Z-19A501-A	-


Cleaning

NOTE: LH side shown, RH side similar.

1. Bend a commercially available 38.1 mm (1.5 in) synthetic brush as shown for cleaning the tracks.



2. Fully close the roof opening panel movable glass.
3. Starting at the front of the seal, spread the seal with your finger and insert a garden hose and pointed attachment into the seal. Continue spreading the seal and spray water into the track as you move to the rear of the vehicle flushing dirt and debris from tracks.

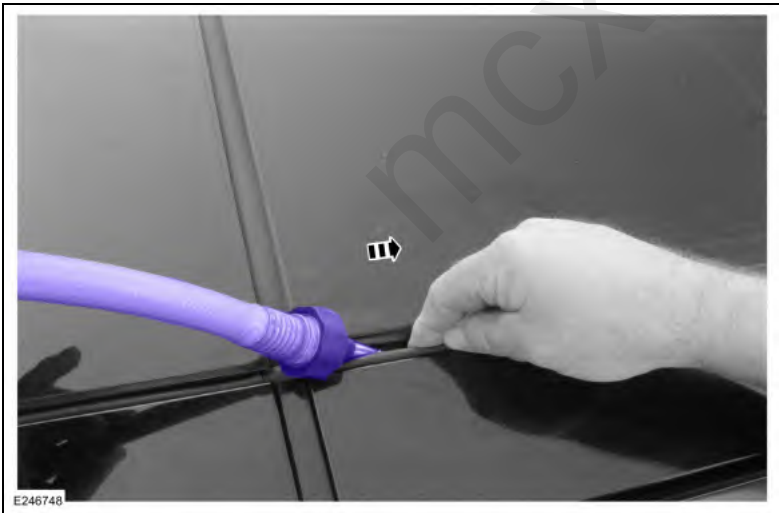

4. Spread the seal with your finger and insert the brush into the front of the seal.