

Removal and Installation

mcx30.com


Air Deflector

Special Tool(s) / General Equipment


Interior Trim Remover

Removal

1. Fully open the roof opening panel glass.

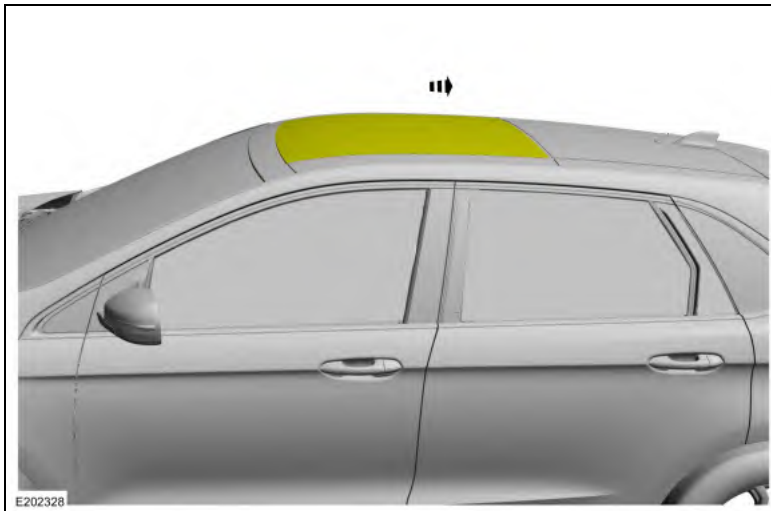

2. Disconnect the front of the acoustic seal and position aside for access.

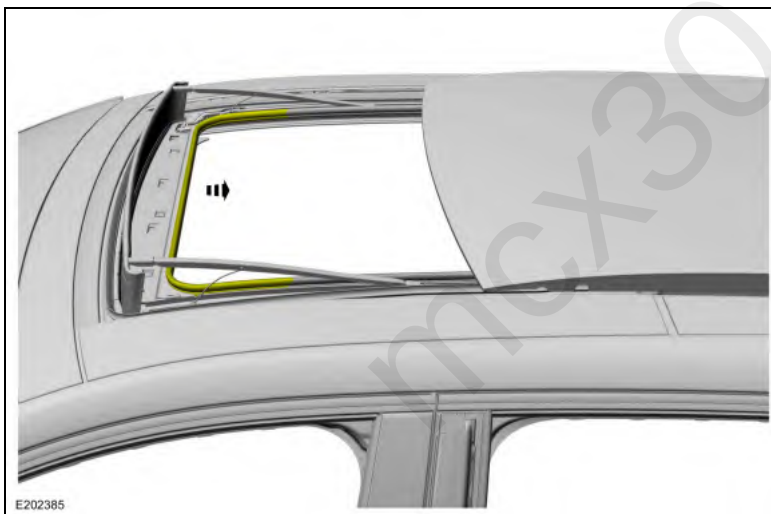

3. Disconnect the air deflector body from the roof opening panel frame.
 1. Release the locking tabs.
Use the General Equipment: Interior Trim Remover
 2. Slide the air deflector body rearward and up to disconnect the air deflector body.