

2. To install reverse the removal procedure.

mcx30.com

Radiator Lower Hose


Special Tool(s) / General Equipment

Hose Clamp Remover/Installer


Removal

All Vehicles


1. Drain the cooling system.
Refer to: Engine Cooling System Draining, Vacuum Filling and Bleeding (303-03B Engine Cooling - 2.7L EcoBoost (238kW/324PS), General Procedures).
2. Remove the front bumper cover.
Refer to: Front Bumper Cover (501-19 Bumpers, Removal and Installation).
3. Release the clamp and disconnect the radiator lower hose.
Use the General Equipment: Hose Clamp Remover/Installer

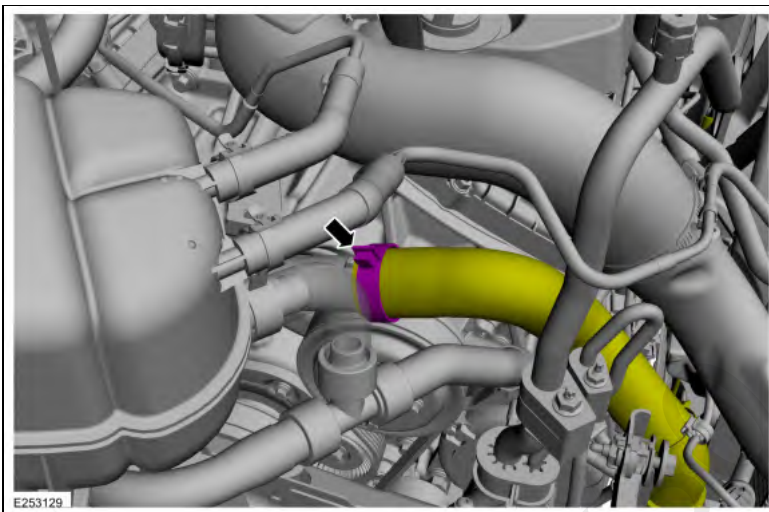

4. Remove the retainers and the lower radiator support.
Torque: 18 lb.ft (24 Nm)

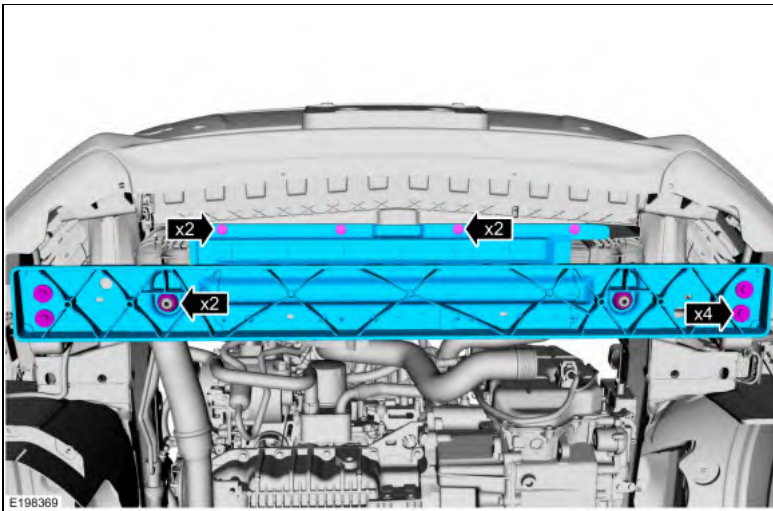

5. Remove the retainers and the RH under body shield.

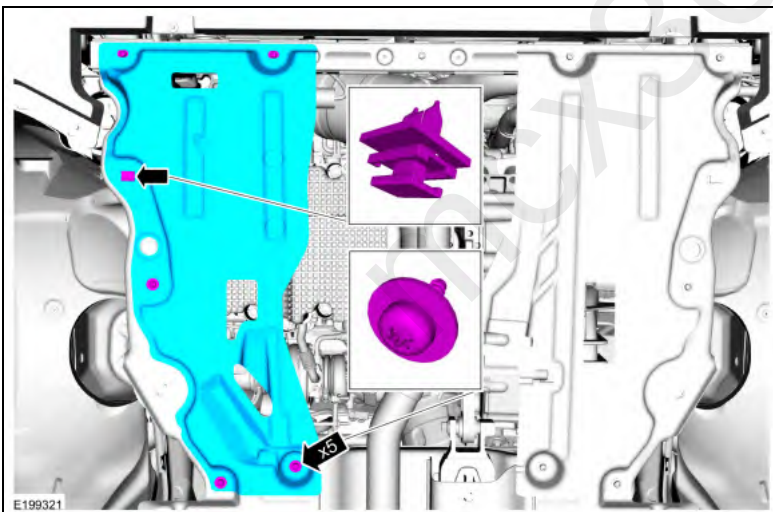

Vehicles without PTU (power transfer unit) Cooler

6. **NOTE:** Components not shown for clarity.

- Detach the electrical wiring harness retainer.
- Pull the lower radiator hose spring clip until the end of the clip is in the detent on the quick connect coupling and remove the lower radiator hose.