





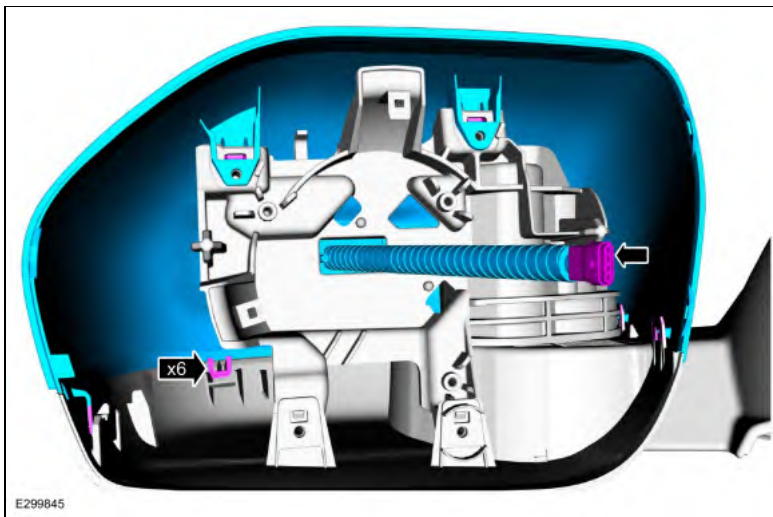



5. Remove the nuts and the exterior mirror flashing light emitting diode lamp from the exterior mirror cover.

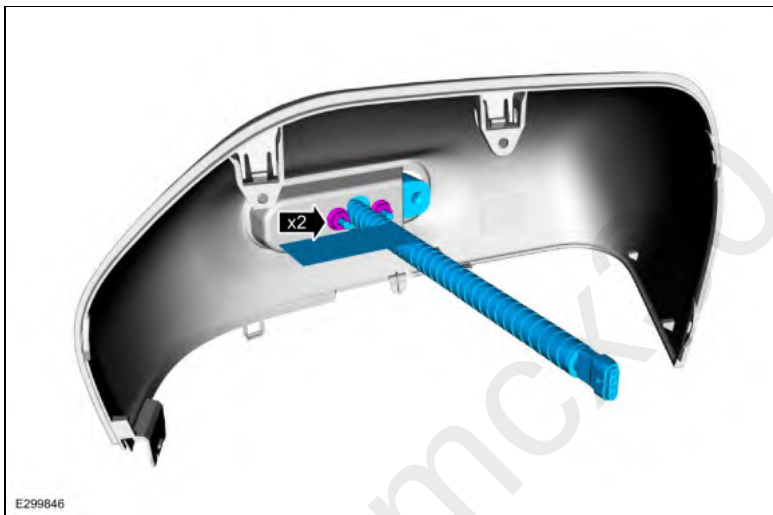



Installation

1. To install, reverse the removal procedure.

Flasher Switch Pad

Removal

NOTE: Removal steps in this procedure may contain installation details.


NOTE: Lighting and siren control module switch pad shown, lighting relay center switch pad similar.

NOTE: The switch pad is mounted by the individual police department and the mounting location will vary.


1. **NOTE:** The U-bracket is not shown due to individual police department installations.

Position the switch pad.

- Release the switch pad from the U-bracket.

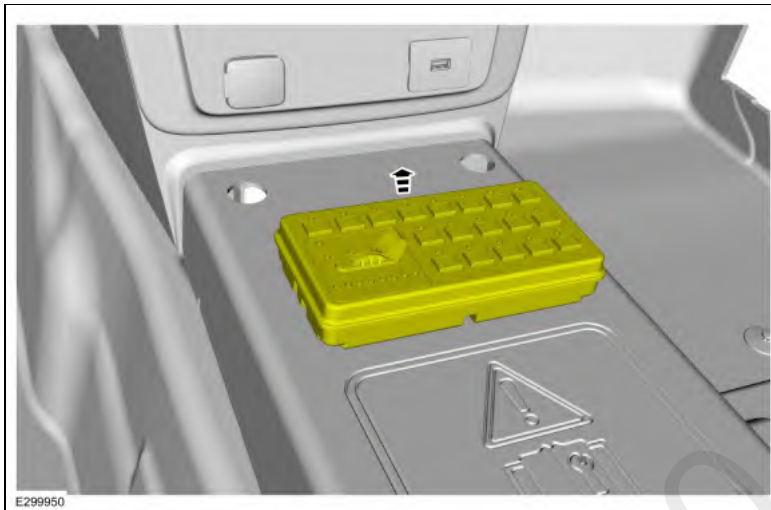

2. Disconnect the electrical connector and remove the switch pad.

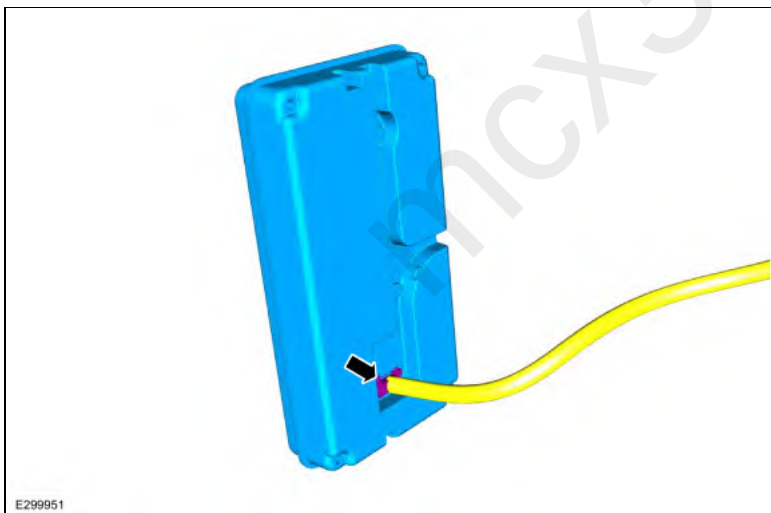

Installation

1. To install, reverse the removal procedure.

