


6. **NOTE:** Typical application shown.

Remove the A-pillar trim panel.

1. Position the A-pillar interior trim panel aside.
2. Disconnect the spot lamp handle electrical connector.
3. Slide the spot lamp handle wiring through the A-pillar interior trim panel.

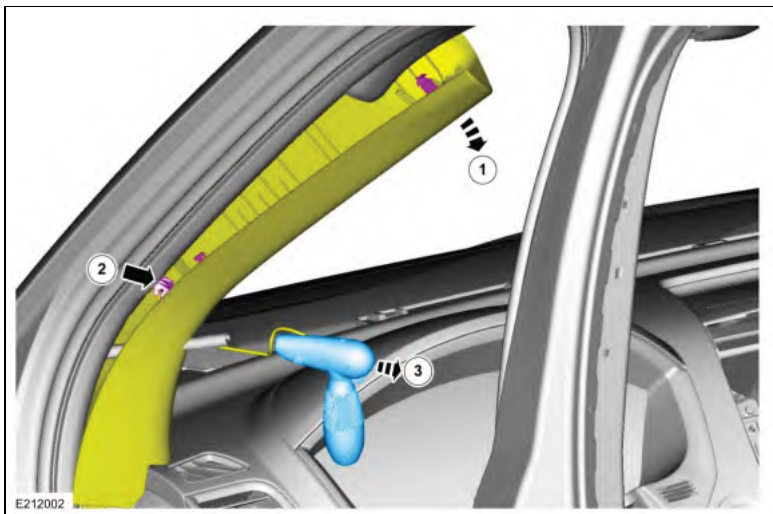

- 7.
- Remove the spot lamp base.
1. Remove the spot lamp base screws.
 2. Slide the spot lamp base out of the A-pillar.



Installation

1. To install, reverse the removal procedure.

2: Chassis

04: Suspension