


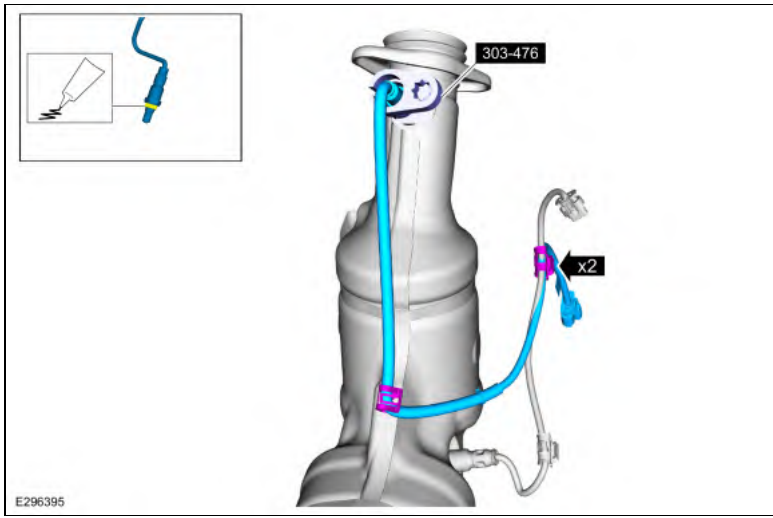

All sensors

3. To install, reverse the removal procedure.


mcx30.com

Knock Sensor (KS)

Removal

NOTE: Removal steps in this procedure may contain installation details

1. Remove the lower intake manifold.
Refer to: Lower Intake Manifold (303-01C Engine - 3.3L Duratec-V6, Removal and Installation).
2. Remove the bolts and the KS.
Torque: 177 lb.in (20 Nm)

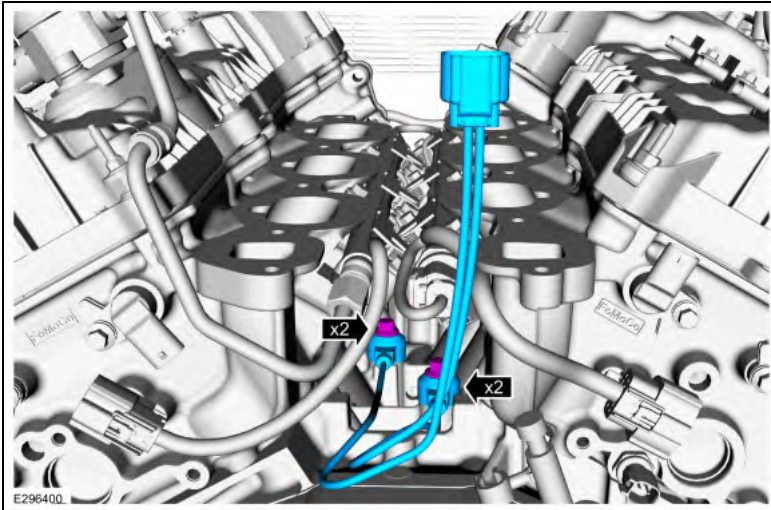

Installation


1. To install, reverse the removal procedure.

Manifold Absolute Pressure and Temperature (MAPT) Sensor

Removal

NOTE: Removal steps in this procedure may contain installation details.

1. Disconnect the electrical connector and remove the MAPT sensor.
Torque: 62 lb.in (7 Nm)

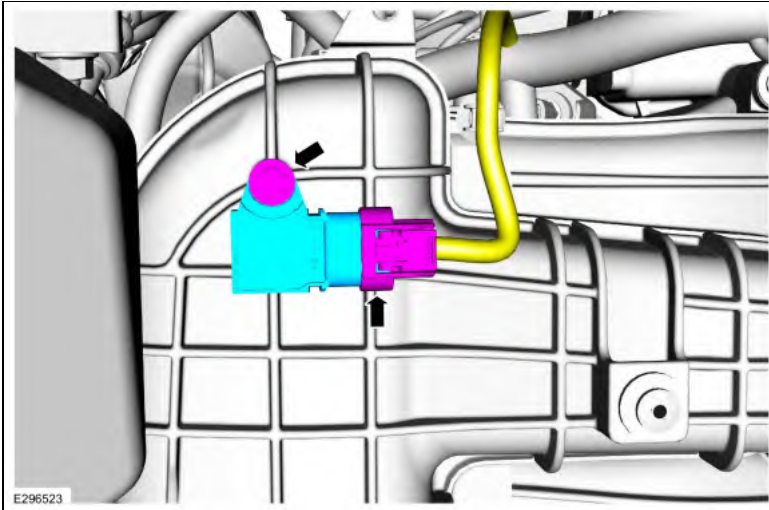

Installation

1. To install, reverse the removal procedure.