

Accelerator Pedal


Removal

NOTICE: Activate the parking brake.


NOTE: Make sure the vehicle powertrain is powered off.

NOTE: Removal steps in this procedure may contain installation details.

1. Remove the screw cap cover.

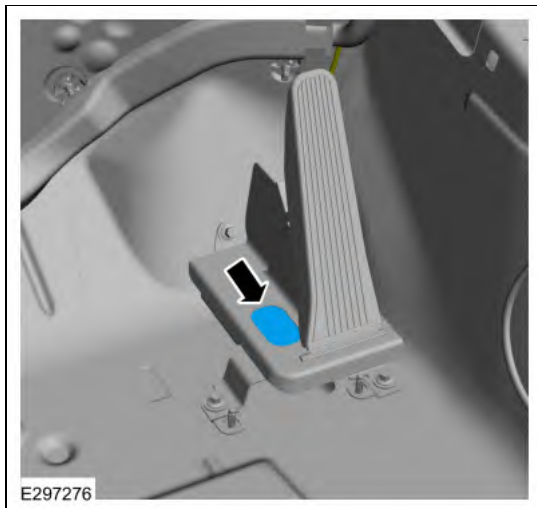

2. Disconnect the electrical connector.

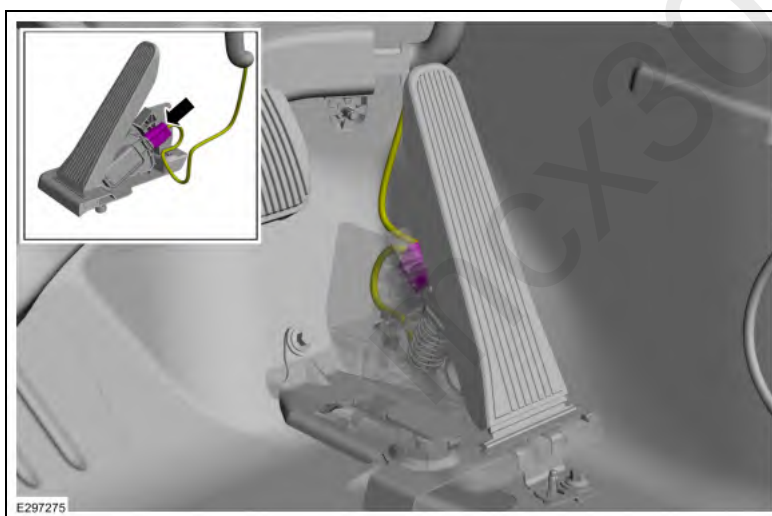

3.
 - Remove the bolt.
Torque: 115 lb.in (13 Nm)
 - Pedal slides forward out of bracket.