



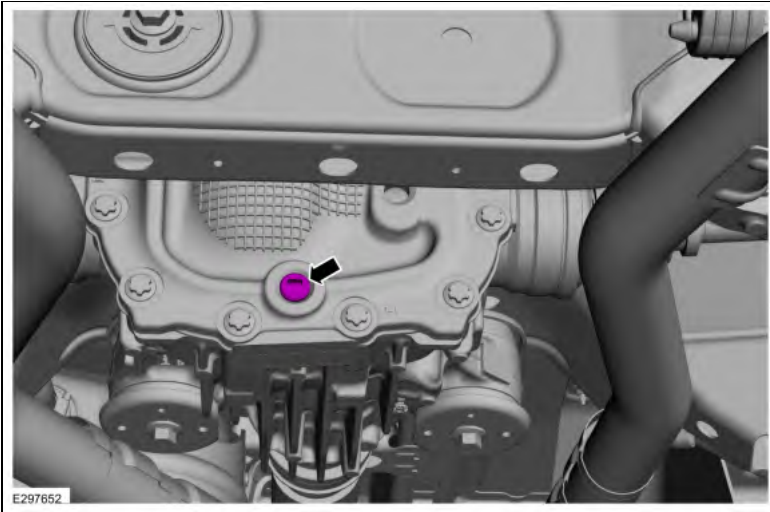

2. Fill the RDU with clean RDU gear lubricant.
Refer to: Specifications (205-02 Rear Drive Axle/Differential, Specifications).
Material: Motorcraft® SAE 75W-85 Premium Synthetic Hypoid Gear Lubricant / XY-75W85-QL (WSS-M2C942-A)

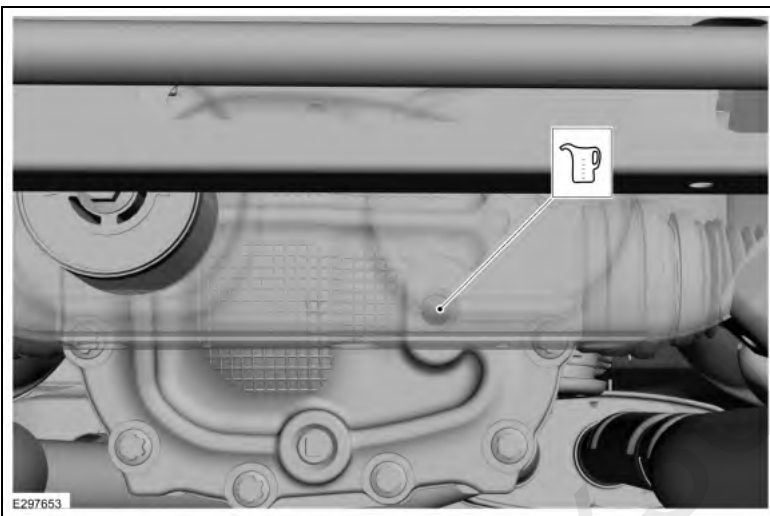

3. Ensure the RDU gear lubricant level to the bottom of the fluid fill plug opening.