

AM/FM1 Antenna Amplifier


Special Tool(s) / General Equipment

Interior Trim Remover


Removal

NOTE: Removal steps in this procedure may contain installation details.

1. Release the clips and remove the liftgate center upper trim panel.
Use the General Equipment: Interior Trim Remover

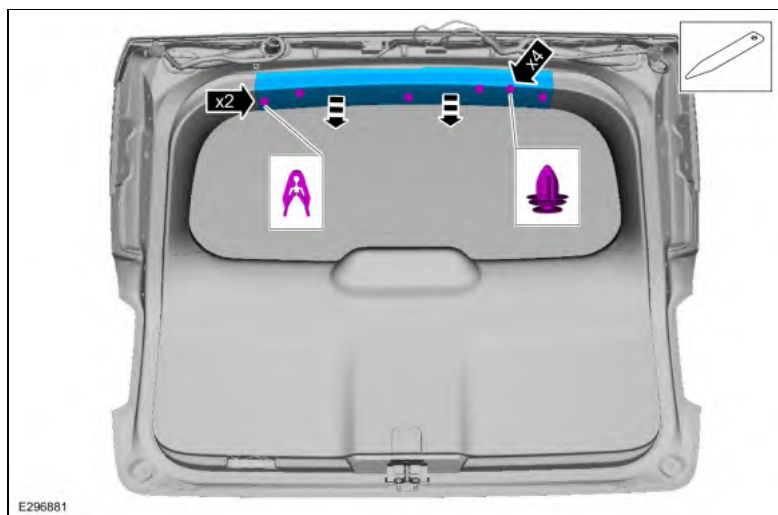

2. Disconnect the connectors, remove the screw and the AM/FM1 antenna amplifier.
Torque: 93 lb.in (10.5 Nm)

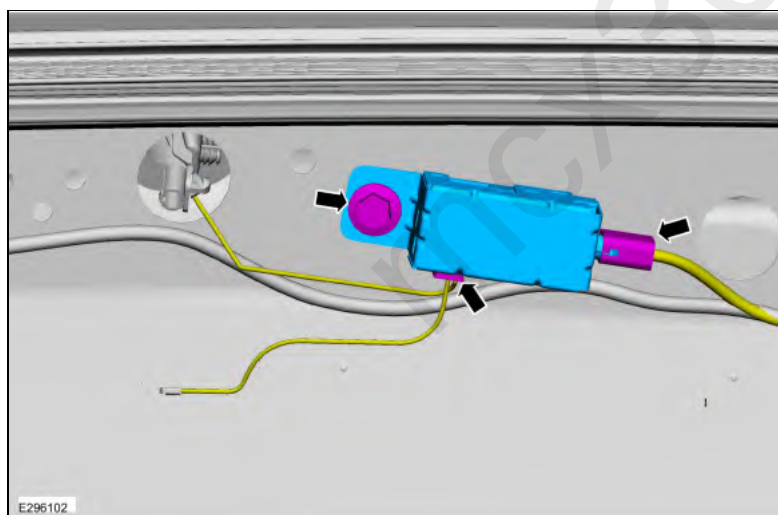

Installation

1. To install, reverse the removal procedure.