




4. Adjust the door as required.

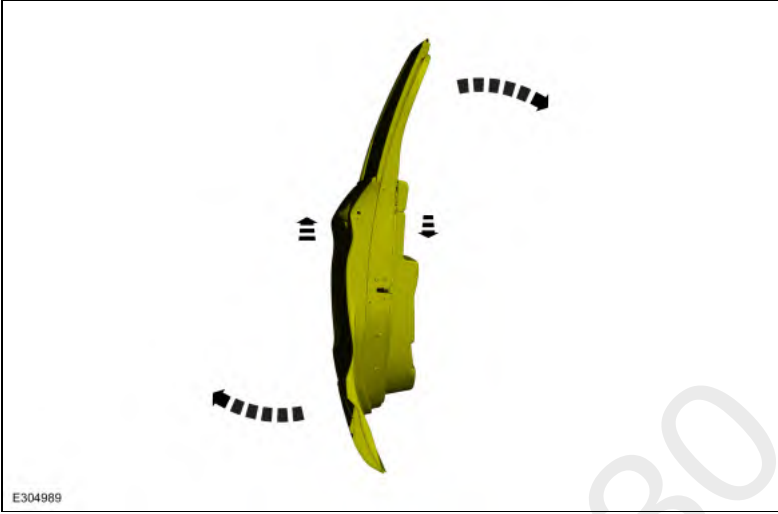

5. Tighten the bolts.
Torque: 35 lb.ft (48 Nm)