


Rear Door Upper Moulding

Removal


NOTE: Removal steps in this procedure may contain installation details.

NOTE: LH side shown, RH side similar.


1. Remove the upper belt moulding screw at front of the door.
Torque: 12 lb.in (1.3 Nm)

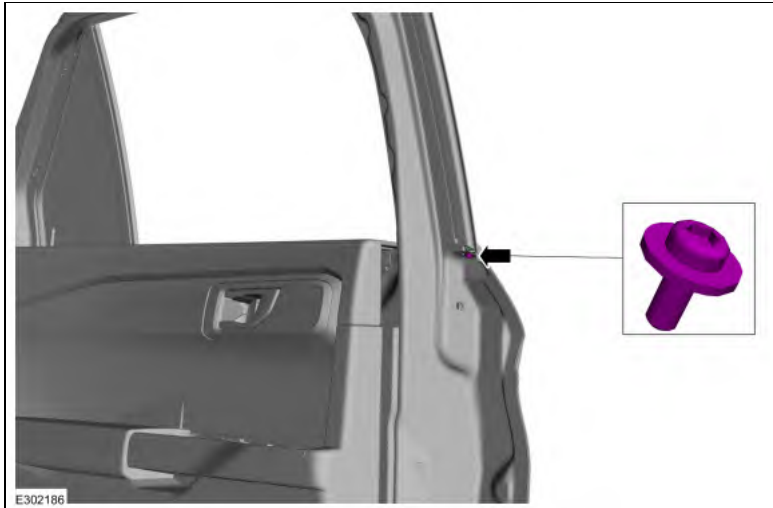


2. Lift the moulding at the front edge using a non-marring trim tool and slide forward to disengage from the tab at the rear and remove the moulding.

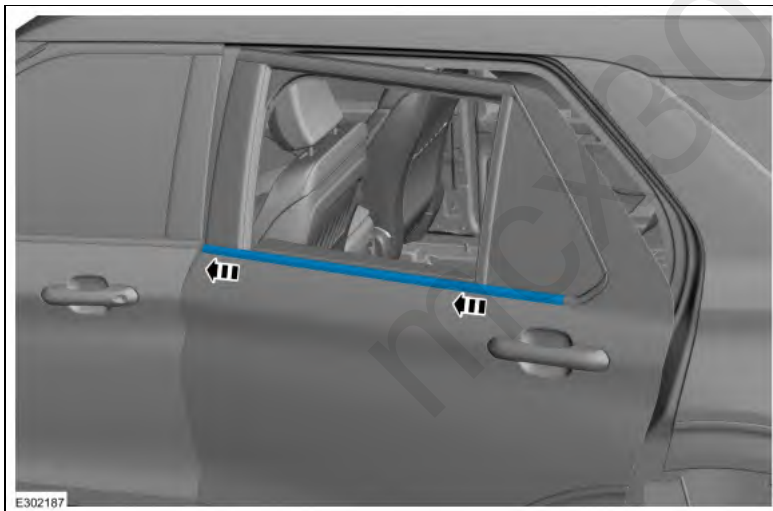

3. Pull the rear door glass runner.

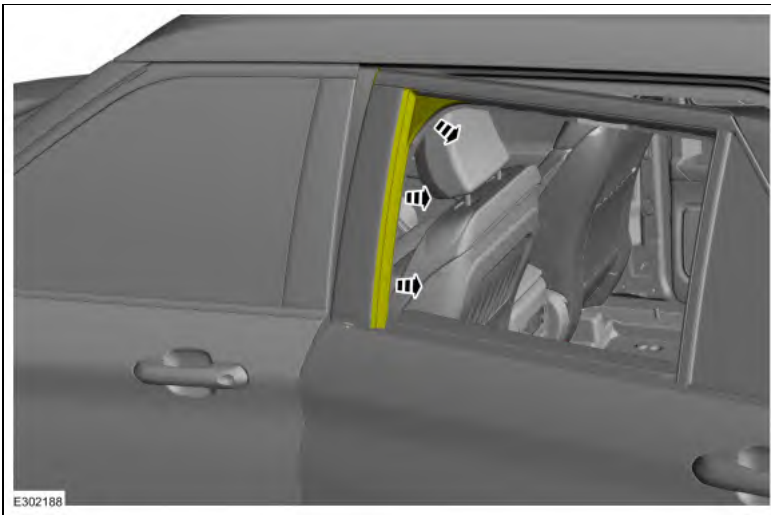

4. Remove the screw.
Torque: 12 lb.in (1.3 Nm)

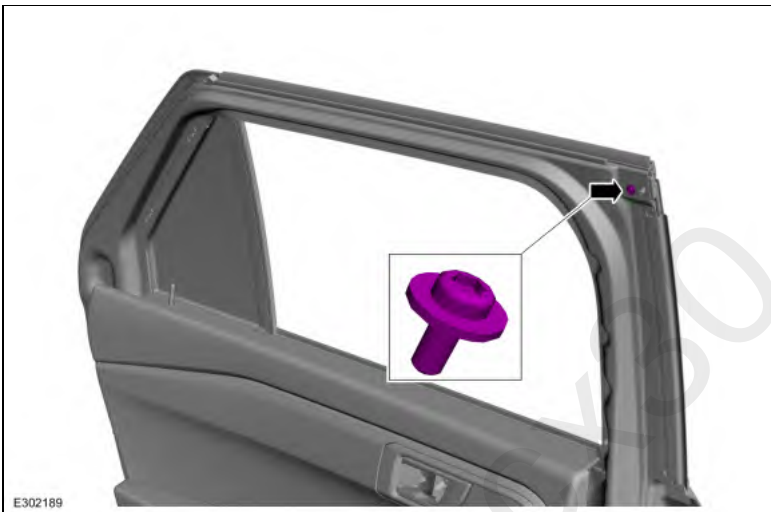

- 5.
- Remove the retainer clips and dislodge the 4 way clip.
 - Remove the rear door upper moulding.