



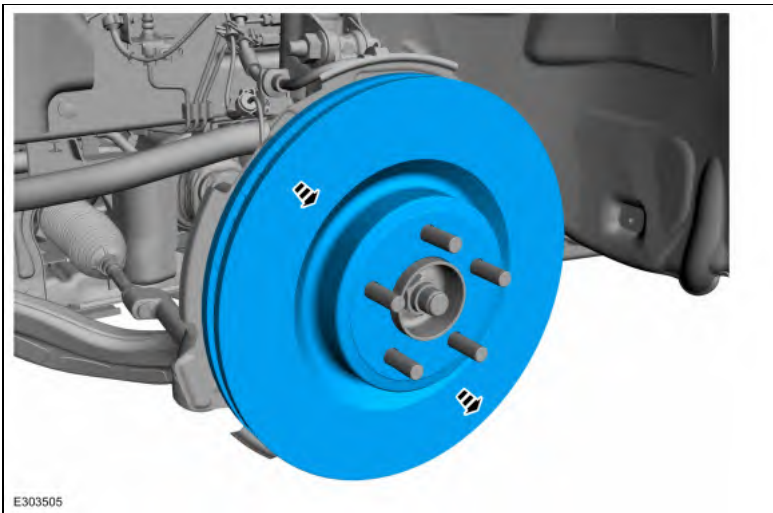

Installation

NOTE: Make sure that the mating faces are clean and free of foreign material.

1. Clean the brake disc mating surfaces using a wire brush and the specified material.
Material: Motorcraft® Metal Brake Parts Cleaner / PM-4-A, PM-4-B

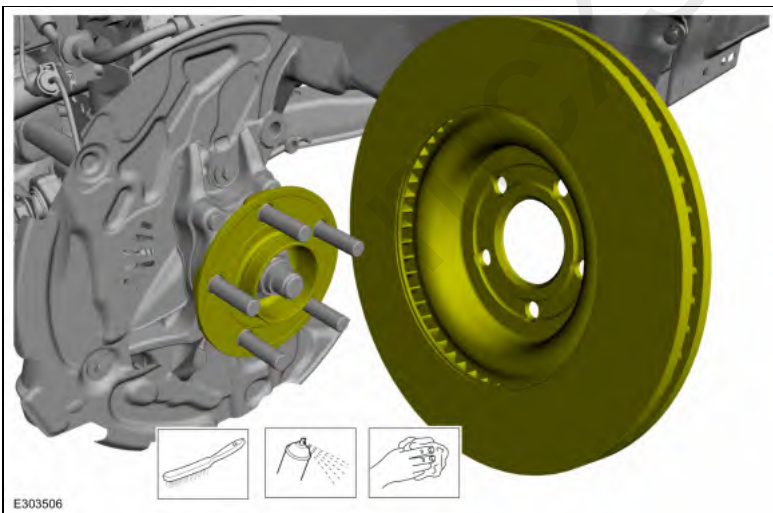

2. **NOTICE:** Make sure that the brake hose is not twisted when installing the brake caliper or damage to the brake flexible hose may occur.
To install, reverse the removal procedure.
3. Apply the brake pedal several times to verify correct brake system operation.