




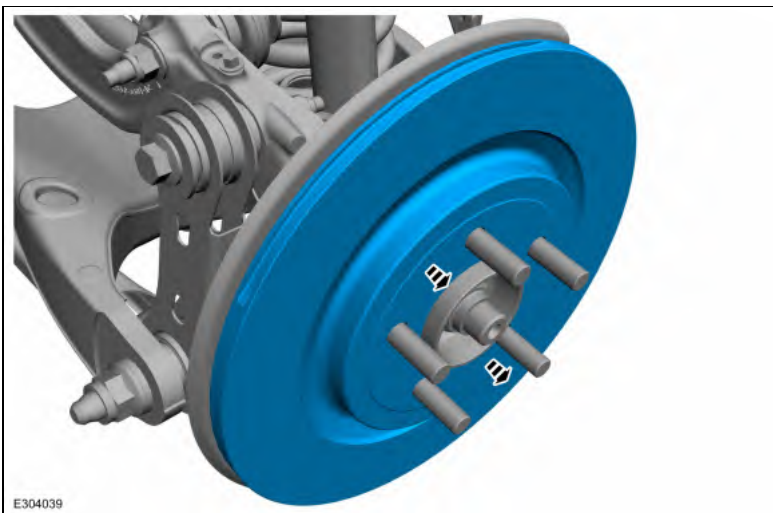



Installation

1. Clean the brake disc mating surfaces using a wire brush and the specified material.
Material: Motorcraft® Metal Brake Parts Cleaner / PM-4-A, PM-4-B

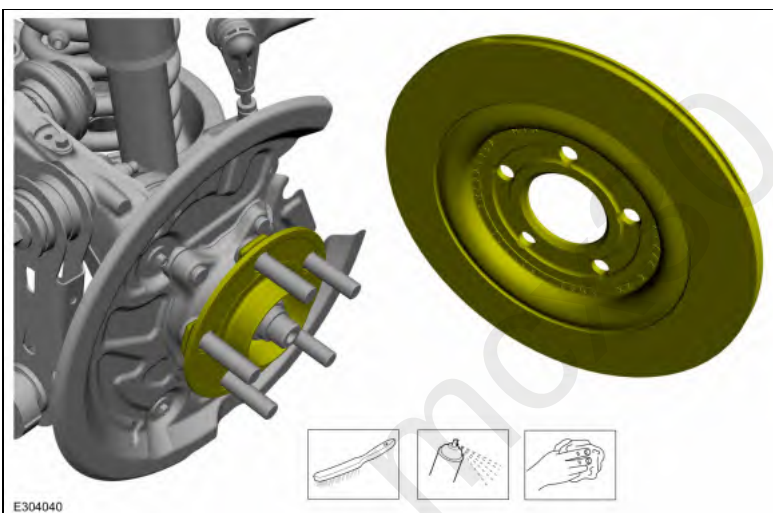



2. **NOTICE: Make sure that the brake hose is not twisted when installing the brake caliper or damage to the brake flexible hose may occur.**

To install, reverse the removal procedure.

3. Deactivate the EPB service mode.
Refer to: Electronic Parking Brake (EPB) Service Mode Activation and Deactivation (206-05 Parking Brake and Actuation, General Procedures).
4. Depress the brake pedal, check the brake fluid level in the brake fluid reservoir and top up as necessary with brake fluid.
Refer to: Specifications (206-00 Brake System - General Information, Specifications).