



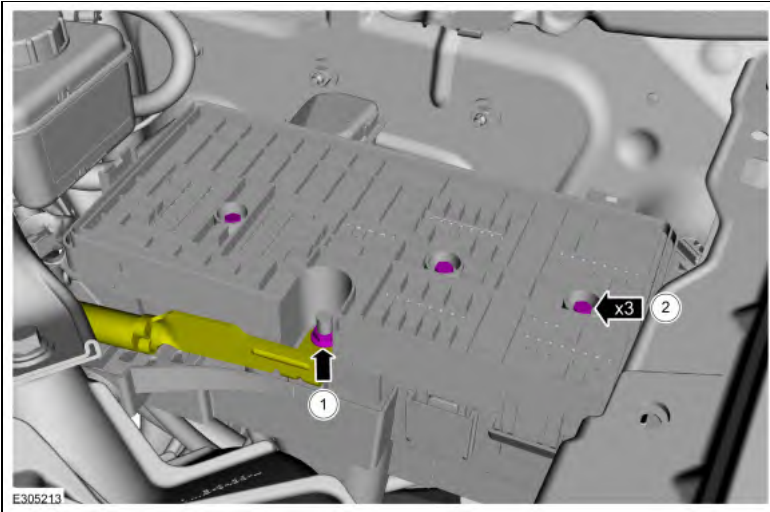

5. Release the tabs and remove the BCMC.

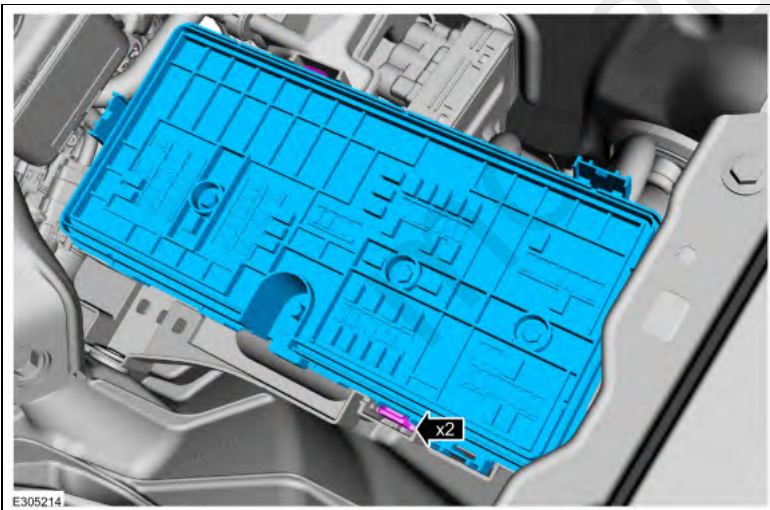

6. Remove the bolts, detach the wiring retainers and then remove the BCMC support bracket.
Torque: 106 lb.in (12 Nm)