



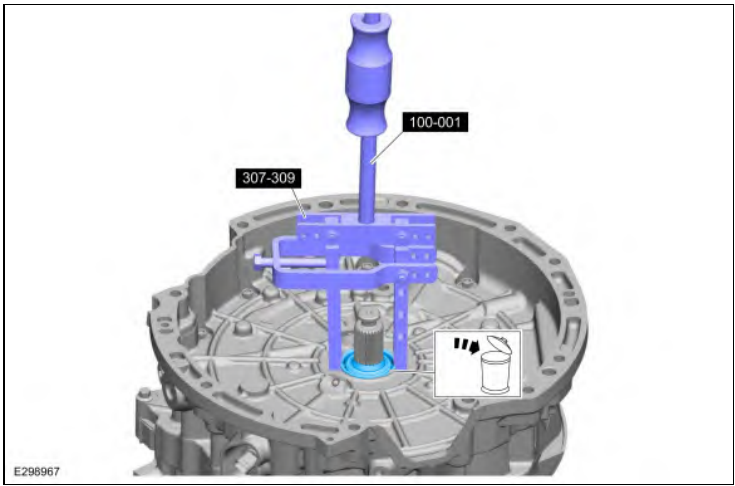


Installation


- 1. Position the input shaft seal.

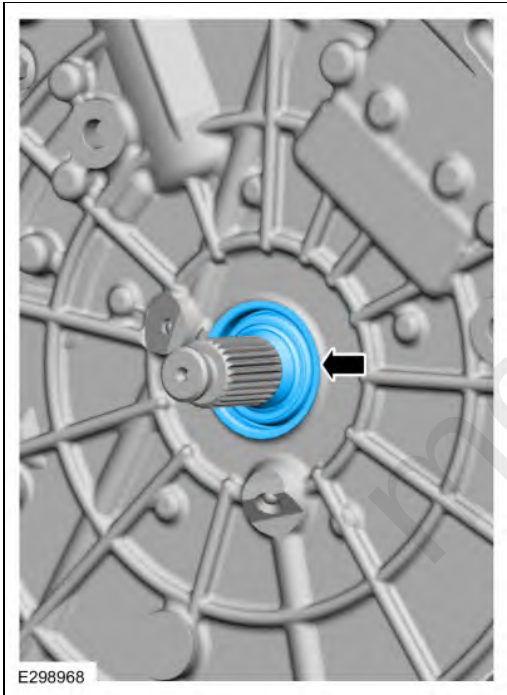

- 2. Using the special tools, install the input shaft seal.
Use Special Service Tool: 205-199 (T83T-3132-A1) Installer, Spindle/Axle Shaft. , 307-802 Installer, Input Shaft.

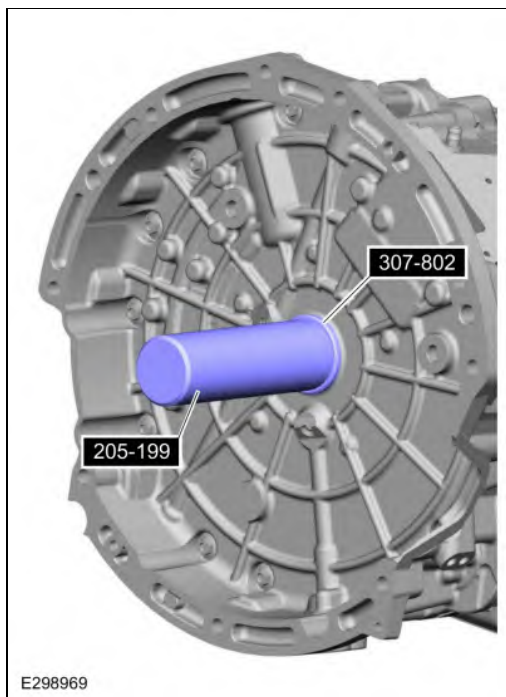

- 3.
- Rotate the transmission to the horizontal position.
Use the General Equipment: Mounting Stand
 - Using a floor crane, remove the transmission from the mounting stand.
Use the General Equipment: Floor Crane

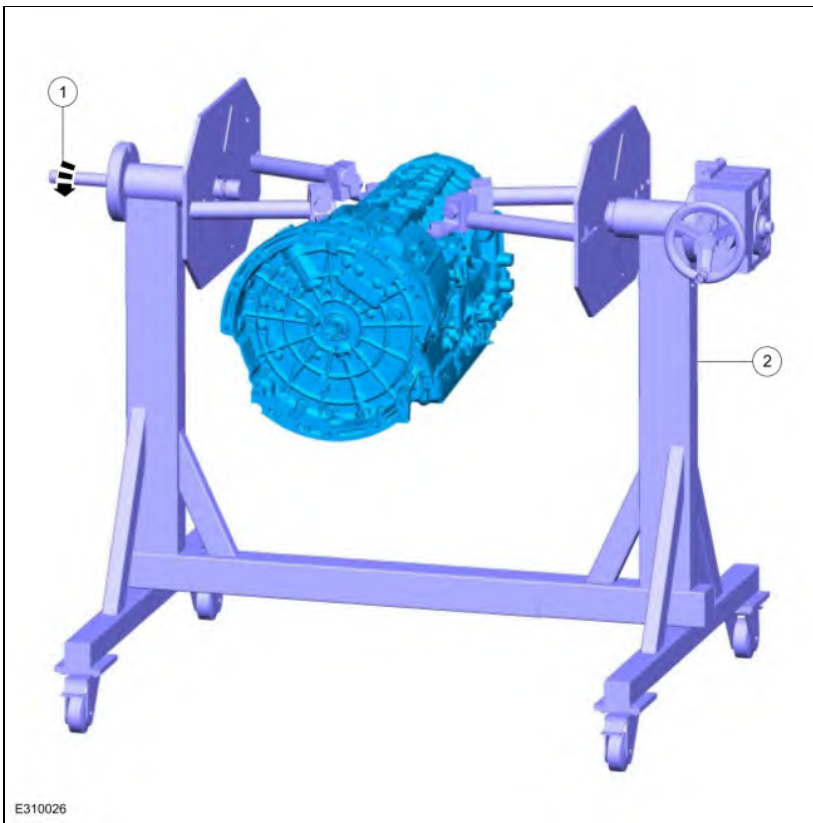

E310026

mcx30.com



4. Install the transmission.
Refer to: Transmission - 3.3L Duratec-V6 â€ˆ Hybrid (BP) (307-01C Automatic Transmission, Transfer Case and Power Transfer Unit - 10-Speed Automatic Transmission â€ˆ 10R80 MHT, Removal and Installation).

303-03A Engine Cooling - 2.3L EcoBoost (201kW|273PS)

Specifications

Lubricants, Fluids, Sealants and Adhesives

Name	Specification	Fill Capacity
Motorcraft® Yellow Concentrated Antifreeze/Coolant VC-13-G	WSS-M97B57-A1	14.05 qt (13.3L) Base, 15.2 qt (14.4L) Trailer tow
Motorcraft® Yellow Prediluted Antifreeze/Coolant VC-13DL-G	WSS-M97B57-A2	14.05 qt (13.3L) Base, 15.2 qt (14.4L) Trailer tow
Motorcraft® Premium Cooling System Flush VC-1	ESR-M14P7-A	-

Antifreeze/Coolant Concentration

Percent Antifreeze/Coolant to Distilled Water	Freeze Protection
50/50	-34.5°F (-36.7°C)
60/40 (Extremely Cold Climates)	-58°F (-50°C)

Cooling System Pressure

Complete cooling system maximum pressure	145 kPa (21 psi)
Pressure relief cap	145 kPa (21 psi)
Radiator pressure test (removed from the vehicle)	138 kPa (20 psi)

Thermostat Opening Temperatures

Starts to open	92°C (197.6°F)
Fully open	106°C (222.8°F)