

Removal and Installation

mcx30.com

Block Heater


Special Tool(s) / General Equipment

Hose Clamp Remover/Installer

Removal

NOTE: Removal steps in this procedure may contain installation details.

1. Drain the cooling system.
Refer to: Engine Cooling System Draining, Vacuum Filling and Bleeding (303-03A Engine Cooling - 2.3L EcoBoost (201kW/273PS), General Procedures).
2. Remove the intake manifold.
Refer to: Intake Manifold (303-01A Engine - 2.3L EcoBoost (201kW/273PS), Removal and Installation).
3. Release the clamp and disconnect the coolant hose.
Use the General Equipment: Hose Clamp Remover/Installer

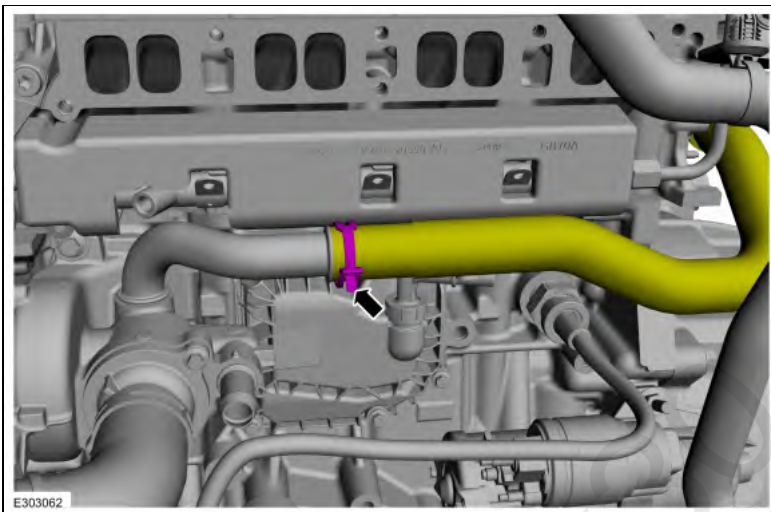

4. **NOTE:** Make sure the block heater wiring is routed and secured away from rotating or hot components.
Disconnect the block heater electrical connector.