




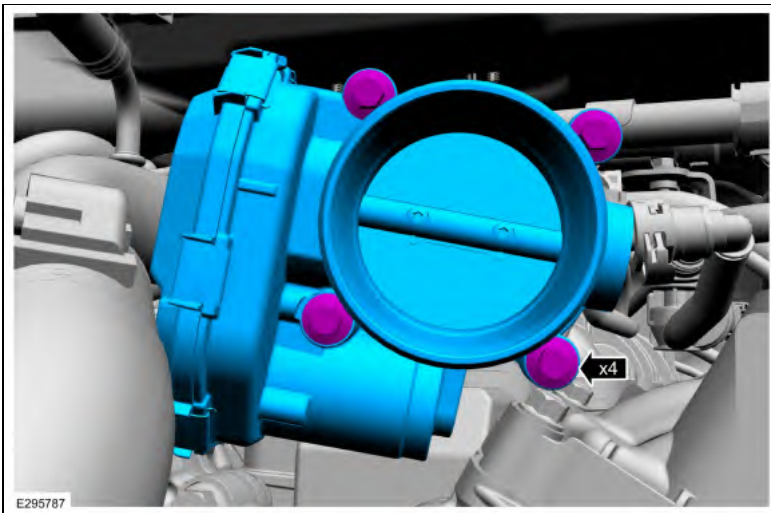


3. **NOTE:** When connecting the throttle body electrical connector engage the red connector locking tab after fully installing the throttle body electrical connector. The red tab will not slide forward unless the throttle body electrical connector is fully installed.

Connect the throttle body electrical connector.

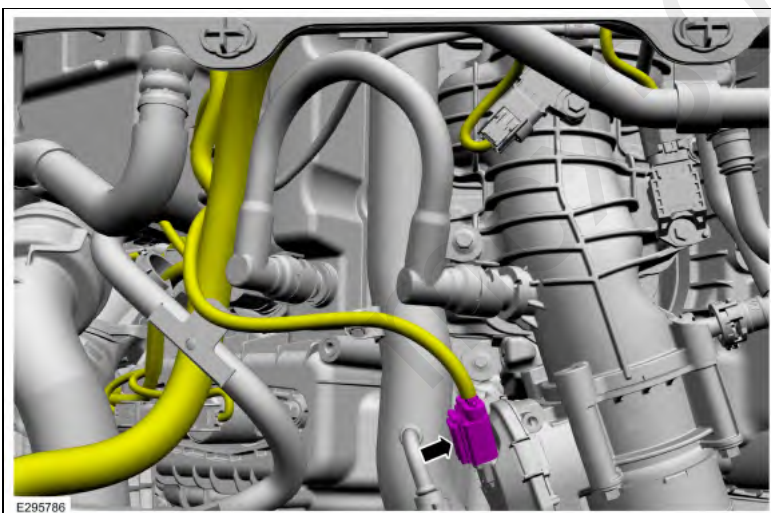

4. Install the charge air cooler outlet pipe, then tighten the clamps.
Torque: 44 lb.in (5.0 Nm)

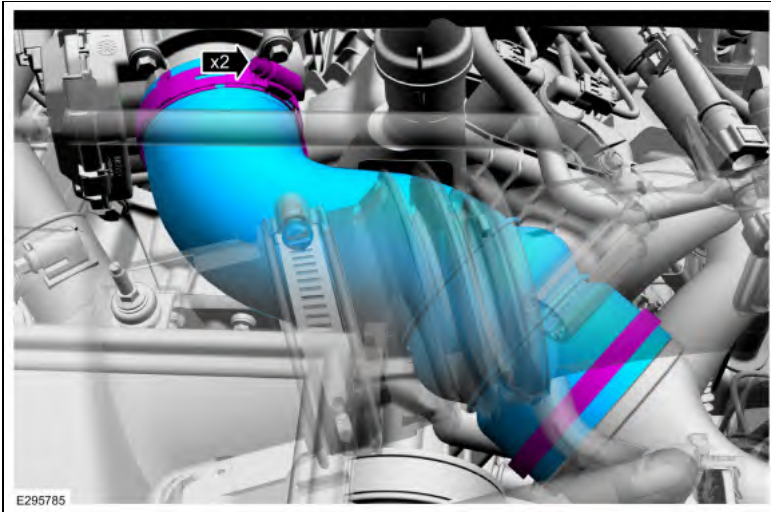

mcx30.com

303-04C Fuel Charging and Controls - 3.3L Duratec-V6|3.3L Duratec-V6 –

Description and Operation