

SECTION 204-01A: Front Suspension — Rear Wheel Drive (RWD)
REMOVAL AND INSTALLATION

2014 F-150 Workshop Manual
Procedure revision date: 10/25/2013

Wheel Studs

Special Tool(s)


	Installer/Remover, C-Frame and Screw 211-023 (T74P-3044-A1)
---	---

ST1494-A

Removal


NOTICE: Suspension fasteners are critical parts that affect the performance of vital components and systems. Failure of these fasteners may result in major service expense. Use the same or equivalent parts if replacement is necessary. Do not use a replacement part of lesser quality or substitute design. Tighten fasteners as specified.

1. Remove the brake disc. Refer to [Section 206-03](#).
2. Special Tool(s): Installer/Remover, C-Frame and Screw 211-023.

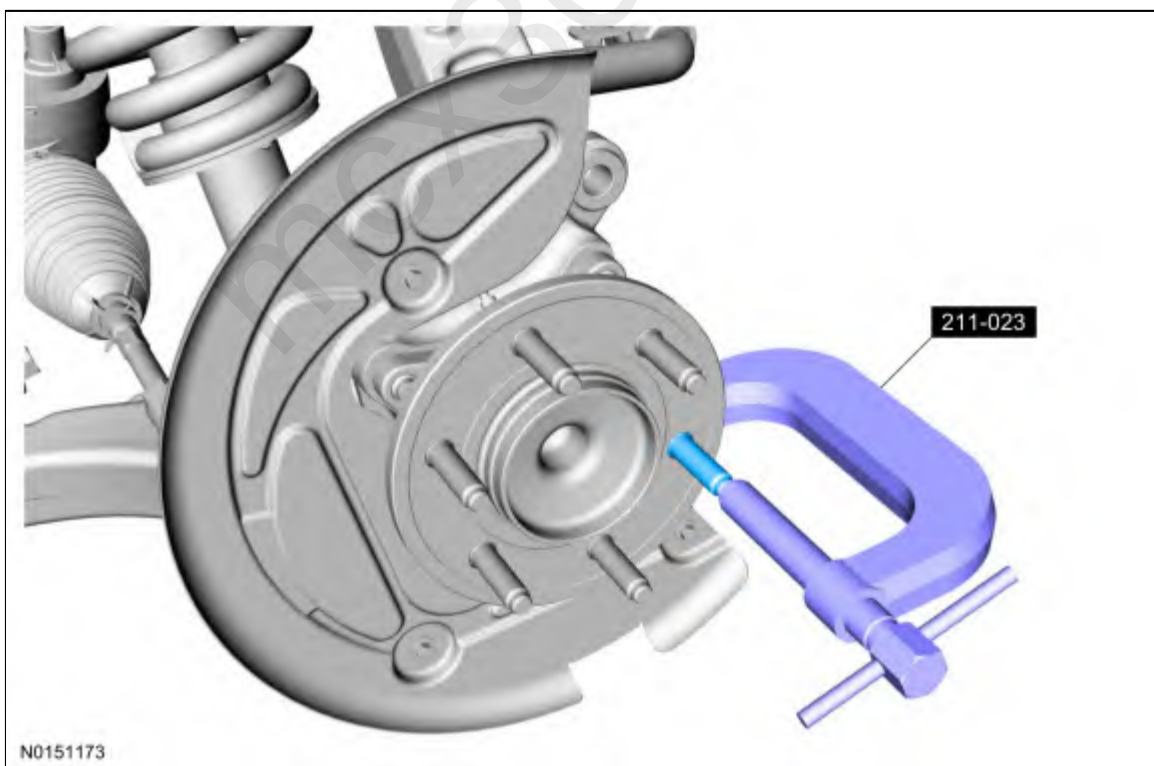

Installation

1. **NOTE:** Make sure to use washers that have an ID that is larger than the OD of the wheel stud serrations. Use enough washers (approximately 3 to 4) to allow the wheel stud to fully seat against the hub flange.
 - Tighten the wheel nut until the wheel stud is seated against the hub flange.
 - Discard the wheel nut.

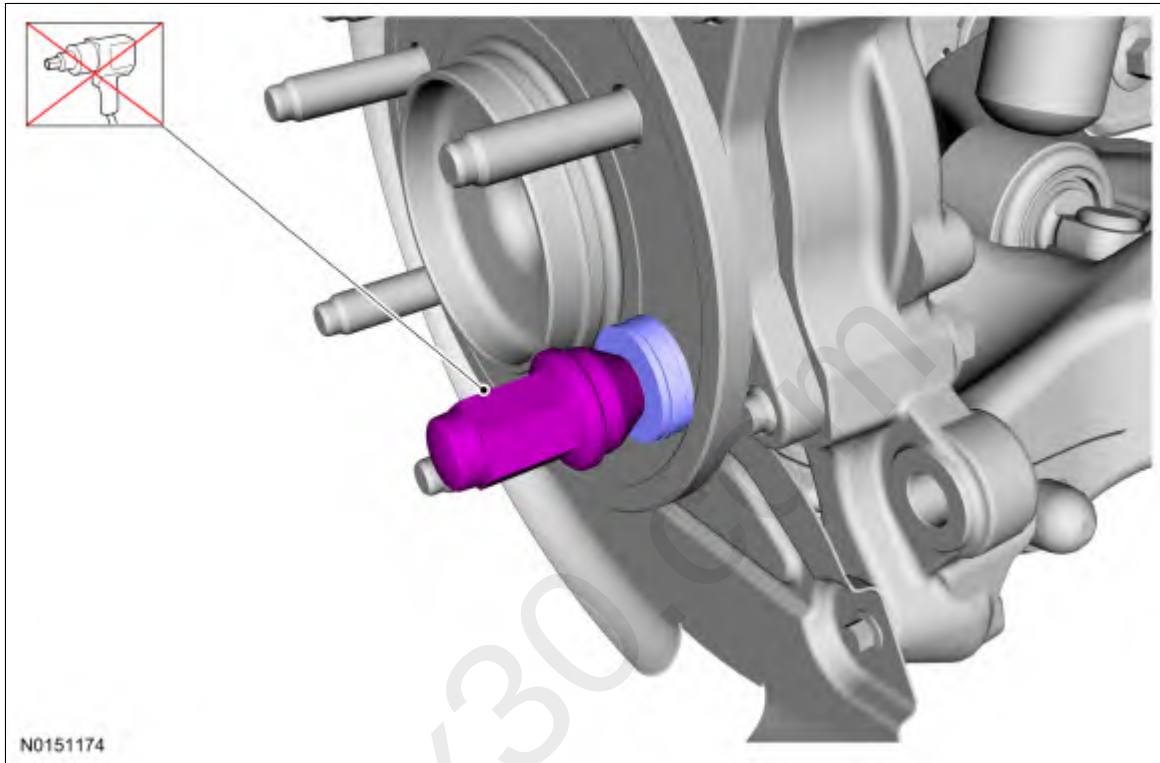

2. Install the brake disc. Refer to [Section 206-03](#).

mcx30.com