


SECTION 417-01: Exterior Lighting
GENERAL PROCEDURES

2014 F-150 Workshop Manual
Procedure revision date: 10/25/2013

Front Fog Lamp Adjustment

Front Fog Lamp Adjustment Screw

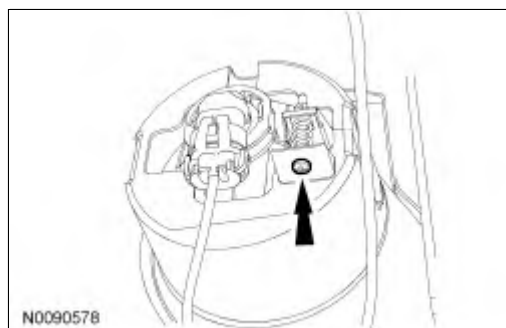


1. **NOTE:** Horizontal aim is not required for this vehicle and is not adjustable. Consult your state vehicle inspection center for recommended tolerance ranges for visual aiming.

Before starting the fog lamp assembly adjustment:


- check the tire inflation.
- make sure there are no other loads in the vehicle other than a half tank of fuel.
- make sure the vehicle is on level ground.
- make sure the fog lamps and headlamps are clean.
- make sure the headlamps are operating and are correctly aimed.

2. **NOTE:** The vertical wall screen must be a minimum of 2.4 m (8 ft) wide.

Park the vehicle on a level surface approximately 7.6 m (25 ft) from the vertical wall or screen directly in front of it.

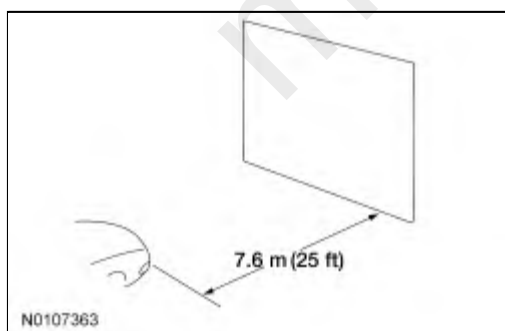

3. The correct visual aim for the fog lamps is with the top edge of the high-intensity zone 10 cm (4 in) below the horizontal center of the fog lamps.

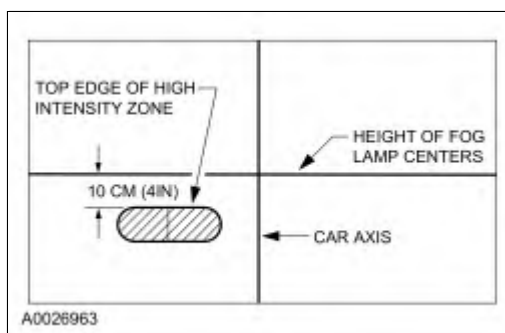

4. If necessary, rotate the adjustment screw until the fog lamp beam is within specification.
-