


SECTION 501-14: Handles, Locks, Latches and Entry Systems
REMOVAL AND INSTALLATION

2014 F-150 Workshop Manual
Procedure revision date: 10/25/2013

Rear Door Latch — Upper, SuperCab

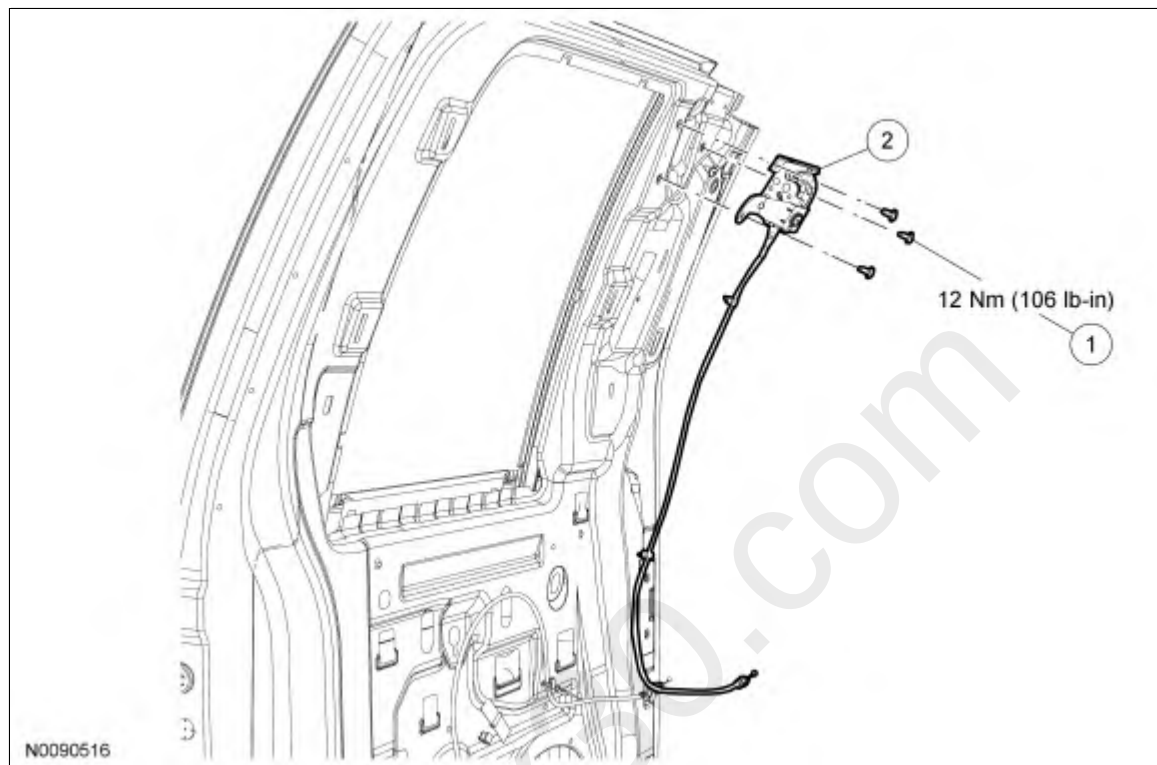

Item	Part Number	Description
1	W714092	Upper door latch bolts (3 required)
2	18264A01/ 18264A00	Upper door latch and cable (LH/RH)

Removal and Installation

1. Remove the rear door trim panel. For additional information, refer to [Section 501-05](#).
2. Disconnect the upper door latch actuating cable from the interior door handle.
3. Remove the interior door handle actuating cable from the guide clips.
4. Remove the 3 upper door latch bolts and the upper door latch.
 - To install, tighten to 12 Nm (106 lb-in).
5. To install, reverse the removal procedure.

mcx30.com