

SECTION 206-03: Front Disc Brake
REMOVAL AND INSTALLATION

2014 F-150 Workshop Manual
Procedure revision date: 10/25/2013

Brake Disc

Material


Item	Specification
Metal Brake Parts Cleaner PM-4-A or PM-4-B (US); CPM-4 (Canada)	—

Removal

1. Remove the wheel and tire. For additional information, refer to [Section 204-04](#).
2. **NOTICE:** Do not allow the caliper and anchor plate assembly to hang from the brake hose or damage to the hose can occur.

Discard the specified component. Follow local disposal regulations.
Relocate and support the component.

- To install, tighten the 2 new bolts to 250 Nm (184 lb-ft).

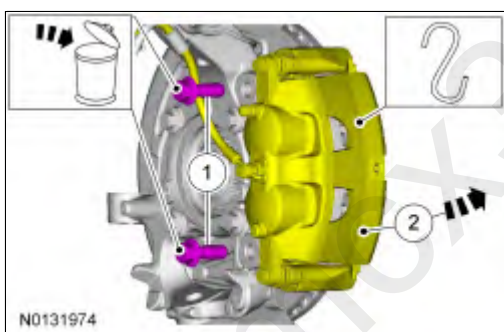


3.



Installation

1. Apply the specified chemical with a spray can.
Clean the specified component with the specified material.

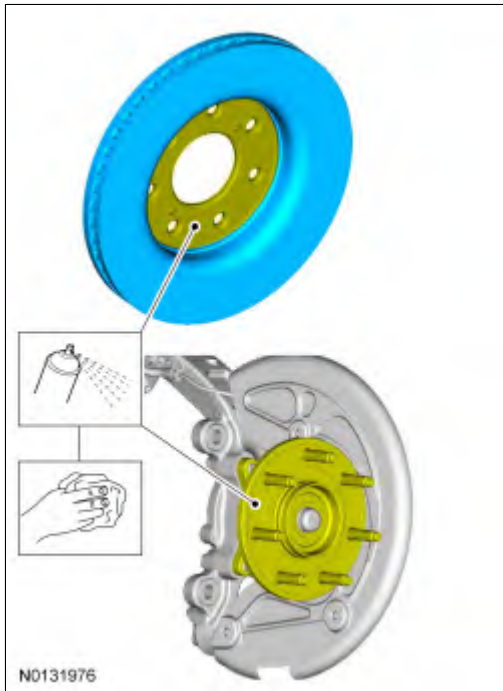

2. To install, reverse the removal procedure.
-