

SECTION 206-04: Rear Disc Brake
REMOVAL AND INSTALLATION

2014 F-150 Workshop Manual
Procedure revision date: 10/25/2013

Brake Disc

Material

Item	Specification
Metal Brake Parts Cleaner PM-4-A or PM-4-B (US); CPM-4 (Canada)	—


Removal

NOTE: Removal steps in this procedure may contain installation details.


1. Remove the wheel and tire. For additional information, refer to [Section 204-04](#).
2. **NOTICE:** Do not allow the caliper assembly to hang from the brake hose or damage to the hose can occur.

Relocate and support the component.

- To install, tighten to 150 Nm (111 lb-ft).

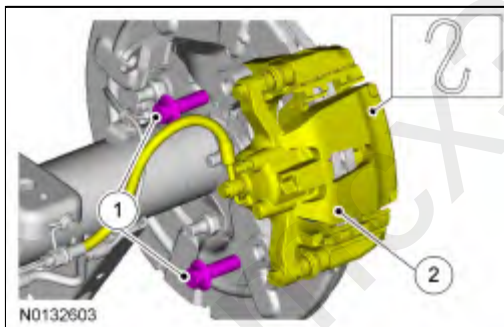


3.

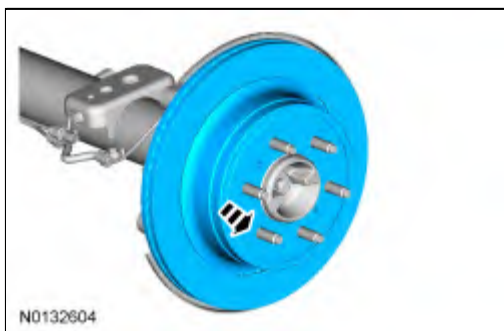

Installation

1. Apply the specified chemical with a spray can. Clean the specified component with the specified

material.

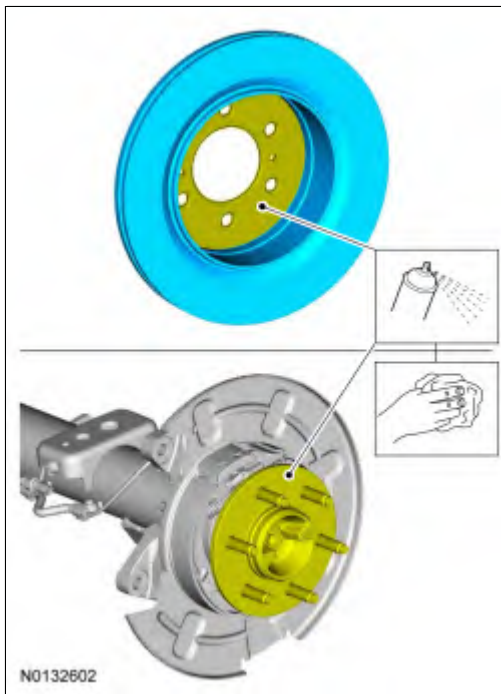

2. To install, reverse the removal procedure.
 - Apply brakes several times to verify correct brake operation.