

SECTION 206-05: Parking Brake and Actuation
REMOVAL AND INSTALLATION

2014 F-150 Workshop Manual
Procedure revision date: 10/25/2013

Parking Brake Shoes

Material


Item	Specification
Molykote® M77 8U7Z-19A506-A	—

Removal

NOTE: Removal steps in this procedure may contain installation details.

NOTE: One parking brake shoe kit contains the linings required for both the LH and RH side.

1. Release the parking brake cable tension. For additional information, refer to [Parking Brake Cable Tension Release](#) in this section.
2. Remove the rear brake disc. For additional information, refer to [Section 206-04](#).
- 3.

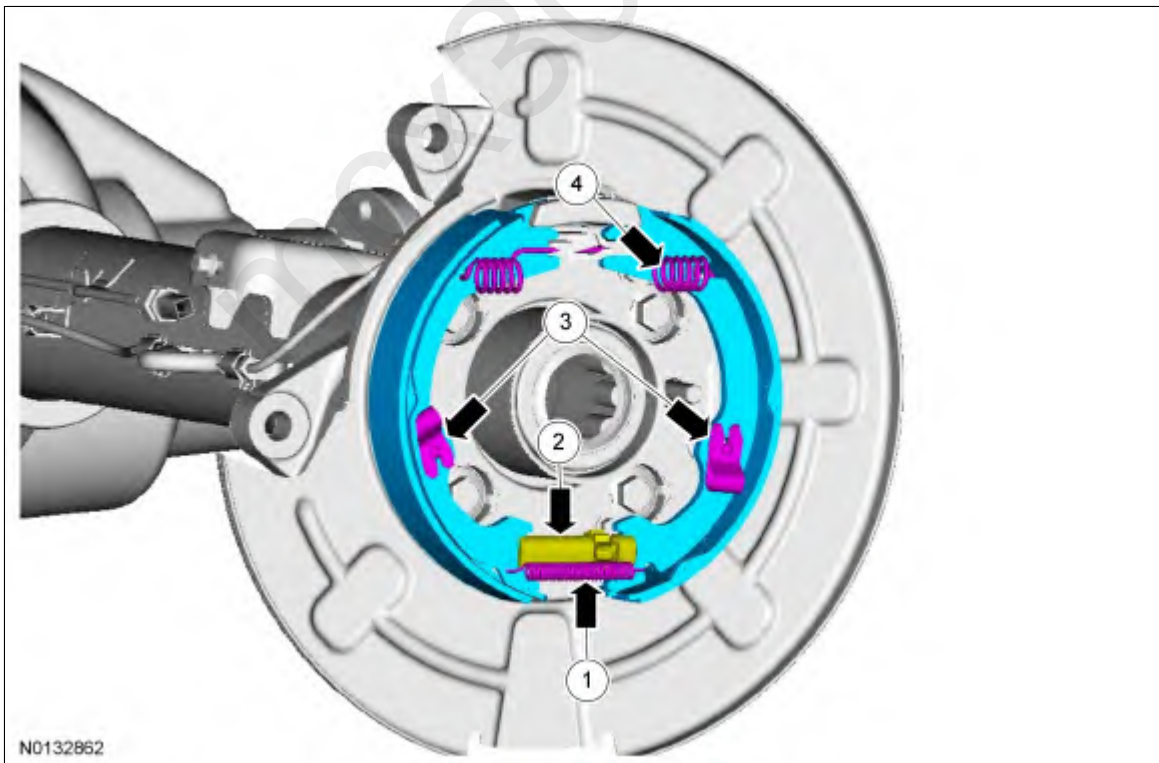


Installation

1. **NOTE:** Using specified grease, lubricate the parking brake shoes where the shoe contacts the

actuator lever and the support bracket.

Apply the substance from the specified tube.

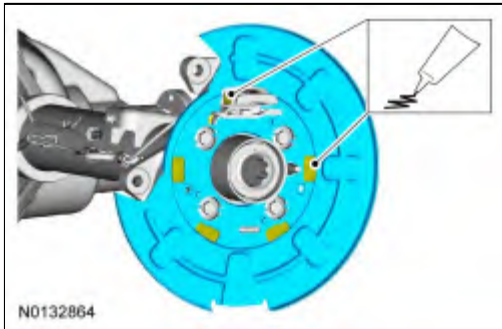

2. **NOTE:** Completely retract the parking brake adjusting screw before installation.

To install, reverse the removal procedure.

3. Adjust the parking brake shoe. For additional information, refer to [Parking Brake Shoe Adjustment](#) in this section.
 4. Reload the tension on the parking brake cable. For additional information, refer to [Parking Brake Cable Tension Release](#) in this section.
-