


Remove the screws and the amplifier.

Disconnect the electrical connectors.

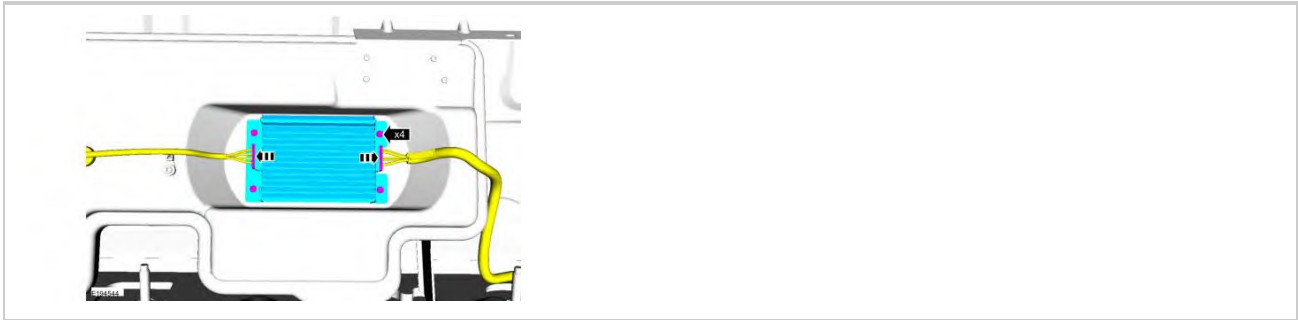

REMOVAL AND INSTALLATION > SUBWOOFER SPEAKER > INSTALLATION

1.

To install, reverse the removal procedure.

REMOVAL AND INSTALLATION > SYNC MODULE [APIM] > REMOVAL



NOTE: Removal steps in this procedure may contain installation details.

1.

Remove the FDIM. Refer to: Front Display Interface Module (FDIM) .

2.

Remove the screws and separate the APIM from the FDIM.



REMOVAL AND INSTALLATION > SYNC MODULE [APIM] > INSTALLATION

1.