

To install, reverse the removal procedure.


REMOVAL AND INSTALLATION > FRONT ACTIVE PARK ASSIST SENSORS > REMOVAL

1.

Remove the front fender moulding.

2.

Remove the screws and the fender liner reinforcement.

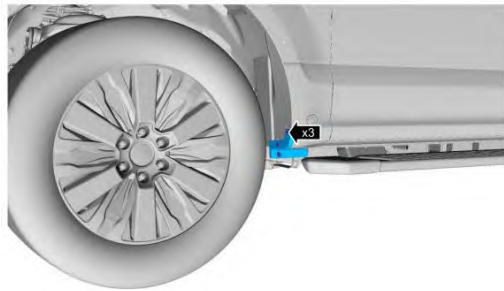

3.

Position the fender splash shield aside.



4.

Remove the fender splash shield bracket.

1.

Remove the 2 push pins.

2.

Slide the fender splash shield bracket up and out.