




7.

Pull the housing away from the vehicle and remove.

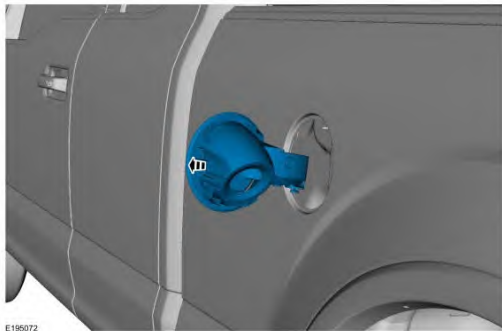

## REMOVAL AND INSTALLATION > FUEL FILLER DOOR ASSEMBLY > INSTALLATION

1.

To install, reverse the removal procedure.

## REMOVAL AND INSTALLATION > REAR DOOR CHECK ARM - SUPERCREW > REMOVAL



*NOTE: Removal steps in this procedure may contain installation details.*



*NOTE: LH side shown in illustration, RH similar.*

1.

Remove the check arm bolt.

Torque

: 17 lb.ft (22.5 Nm)