


23.

Install the front door hinges to the body.

Torque

: 20 lb.ft (27 Nm)

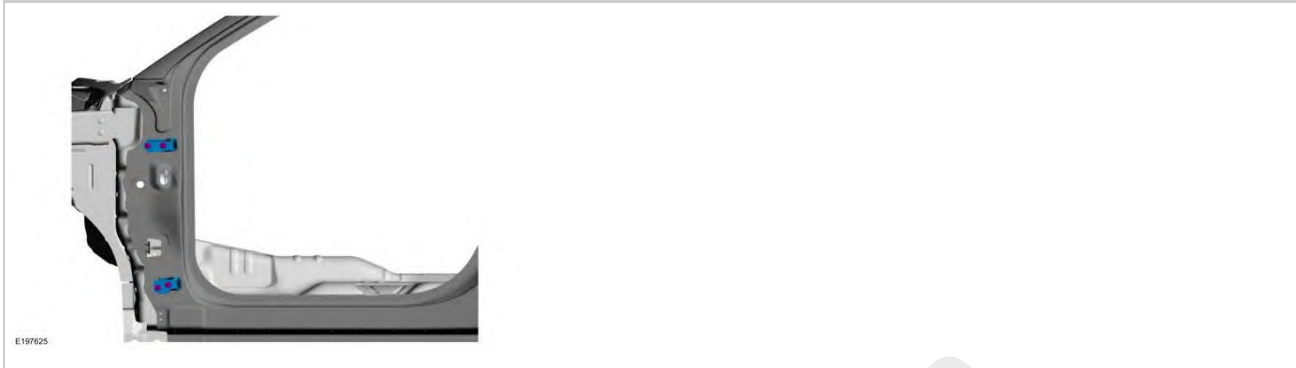

24.

Install the front door. Refer to: Front Door - Regular Cab/SuperCrew . Refer to: Front Door - SuperCab .

25.

Install the front fender. Refer to: Fender .

26.

Align the front door. Refer to: Front Door Alignment - Regular Cab/SuperCrew . Refer to: Front Door Alignment - SuperCab .

27.

Repower the SRS. Refer to: Supplemental Restraint System (SRS) Repowering .

REMOVAL AND INSTALLATION > A-PILLAR OUTER PANEL SECTION AND REINFORCEMENT

Special Tool(s) / General Equipment

6.5 mm Drill Bit
Polydrive Bit Socket
Self-Piercing Rivet (SPR) Remover/Installer
Belt Sander
Blind Rivet Gun
Hot Air Gun