

REMOVAL AND INSTALLATION > FRONT FENDER MOULDING > REMOVAL



NOTE: Removal steps in this procedure may contain installation details.




NOTE: LH side shown, RH side similar.

1.

Remove the push pins and the screws.


Torque

: 9 lb.in (1.0 Nm)

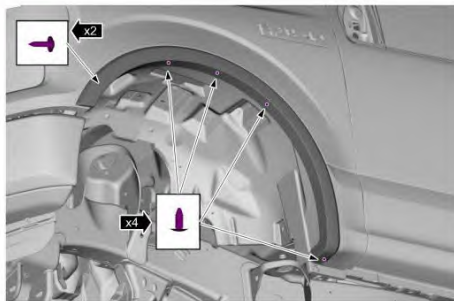

2.

Using a non-marring trim tool, disengage the push pin retainers from the fender and remove the moulding.

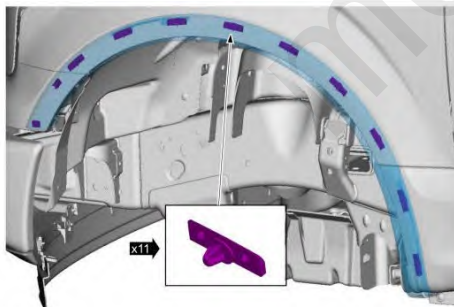

REMOVAL AND INSTALLATION > FRONT FENDER MOULDING > INSTALLATION

1.

To install, reverse the removal procedure.