



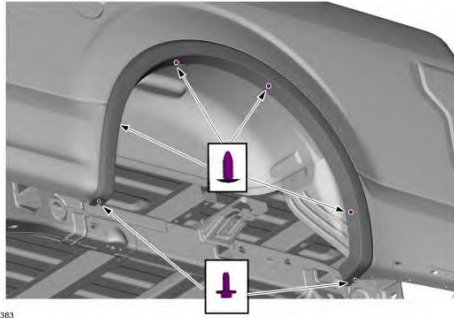

2.

Using a non-marring trim tool, detach the 13 retainers and remove the moulding.

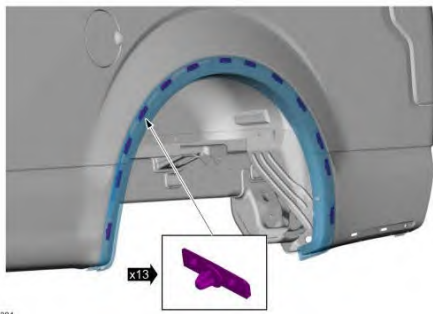

REMOVAL AND INSTALLATION > REAR QUARTER PANEL MOULDING > INSTALLATION

1.

To install, reverse the removal procedure.

REMOVAL AND INSTALLATION > ROOF MOULDING > REMOVAL



NOTE: Removal steps in this procedure may contain installation details.

1.

Remove the following items:

Remove the back glass. Refer to: Fixed Glass .

2.

Drill out the rivets and remove the moulding.